

Comprehensive Long-term Environmental Action Navy

CONTRACT NUMBER N62467-94-D-0888

N00164.AR.000982
NSWC CRANE
5090.3a



**Health and Safety Plan
for
RCRA Facility Investigation
at
Building 106 Pond (SWMU 8) and
Roads and Grounds Area
(SWMU 15)**

**Naval Surface Warfare Center
Crane Division
Crane, Indiana**

Contract Task Order 0331

September 16, 2005



Naval Facilities Engineering Command
Southern Division
Naval Facilities Engineering Command
2155 Eagle Drive
North Charleston, South Carolina 29406



TETRA TECH NUS, INC.

661 Andersen Drive • Pittsburgh, PA 15220
Tel 412.921.7090 • Fax 412.921.4040 • www.tetrattech.com

PITT-04-6-004

April 3, 2006

Project No. 112GN1245

Mr. William Gates (ES31)
Commander, Southern Division
Naval Facilities Engineering Command
2155 Eagle Drive, P.O. Box 190010
North Charleston, SC 29419-9010

Reference: CLEAN Contract N62467-94-D-0888
Contract Task Order No. 0331

Subject: Health and Safety Plan (HASP) for the Building 106 Pond (SWMU 8) and
the Roads and Grounds Area (SWMU 15), Dated September 16, 2005

Dear Mr. Gates:

Enclosed is one (1) copy of change pages for the subject HASP dated September 16, 2005. This version has been modified to take into account Health and Safety procedures for the bathymetry survey at the Building 106-Pond.

Enclosed Table 1 constitutes instructions for inserting enclosed replacement pages to update your hard copy of the HASP.

Please contact Ralph Basinski at 412-921-8308 (e-mail Ralph.Basinski@ttnus.com) regarding any questions or comments that you may have on the enclosed HASP.

Sincerely,

Ralph R. Basinski
Task Order Manager

RRB/mlg
Enclosure

cc: Mr. Tom Brent, NSWC Crane (letter and 1 copy of change pages)
Ms. Debra Humbert, TtNUS, Inc. (letter only)
Mr. Mark Perry, TtNUS, Inc. (letter and 1 copy of change pages)
Mr. Ralph Basinski, TtNUS, Inc. (letter and 1 copy of change pages)
Mr. Terry Rojahn, TtNUS, Inc. (letter and 1 copy of change pages)
Mr. John Wright, TtNUS, Inc. (letter and 1 copy of HASP)
Mr. Jim Goerd, TtNUS, Inc. (letter and 1 copy of change pages)
Crane Library (letter and 1 copy of change pages)
File Copy – CTO 0331 (letter and 1 copy of change pages)

TABLE 1

**DIRECTIONS FOR INCORPORATING CHANGE PAGES INTO THE
HASP FOR BUILDING 106 POND (SWMU 8) and ROADS AND
GROUNDS AREA (SWMU 15)**

**DATED
SEPTEMBER 16, 2005**

✓ Remove existing Table of Contents	Replace with updated Table of Contents dated April 2006
✓ Remove existing Section 4.0 text	Replace with updated Section 4.0 text dated April 2006
✓ Remove existing Page 6-9/6-10	Replace with updated Page 6-9/6-10 dated April 2006
✓ Remove existing Page 6-19	Replace with updated/new Pages 6-19/6-20 and 6-21/6-22 dated April 2006

HEALTH AND SAFETY PLAN
FOR
BUILDING 106 POND (SWMU 8) AND
ROADS AND GROUNDS AREA (SWMU 15)

NAVAL SURFACE WARFARE CENTER (NSWC)
CRANE, INDIANA

COMPREHENSIVE LONG-TERM
ENVIRONMENTAL ACTION NAVY (CLEAN) CONTRACT

Submitted to:
Southern Division
Naval Facilities Engineering Command
2155 Eagle Drive
North Charleston, South Carolina 29406

Submitted by:
TetraTech NUS
Foster Plaza 7, 661 Andersen Drive
Pittsburgh, Pennsylvania 15220

CONTRACT NUMBER N62467-94-D-0888
CONTRACT TASK ORDERS 0331

September 2005

PREPARED UNDER THE SUPERVISION OF:

APPROVED FOR SUBMITTAL BY:



RALPH R. BASINSKI
TASK ORDER MANAGER
TETRA TECH NUS
PITTSBURGH, PENNSYLVANIA



MATTHEW M. SOLTIS, CIH, CSP
CLEAN HEALTH AND SAFETY MANAGER
TETRA TECH NUS
PITTSBURGH, PENNSYLVANIA

TABLE OF CONTENTS

<u>Section</u>	<u>Page No.</u>
1.0 INTRODUCTION.....	1-1
1.1 KEY PROJECT PERSONNEL AND ORGANIZATION	1-1
1.2 SITE INFORMATION AND PERSONNEL ASSIGNMENTS	1-3
2.0 EMERGENCY ACTION PLAN.....	2-1
2.1 INTRODUCTION.....	2-1
2.2 EMERGENCY PLANNING.....	2-1
2.3 EMERGENCY RECOGNITION AND PREVENTION.....	2-2
2.3.1 Recognition.....	2-2
2.3.2 Prevention	2-3
2.4 SAFE DISTANCES AND PLACES OF REFUGE.....	2-3
2.5 EVACUATION ROUTES AND PROCEDURES.....	2-3
2.6 DECONTAMINATION PROCEDURES.....	2-4
2.7 EMERGENCY ALERTING AND ACTION/RESPONSE PROCEDURES.....	2-4
2.8 PPE AND EMERGENCY EQUIPMENT	2-5
2.9 EMERGENCY CONTACTS	2-5
2.10 EMERGENCY ROUTES TO HOSPITALS.....	2-7
2.11 INJURY/ILLNESS REPORTING	2-10
3.0 SITE BACKGROUND	3-1
3.1 SITE HISTORY	3-1
3.2 SWMU 8, BUILDING 106 POND AREA.....	3-1
3.3 SWMU 15, ROADS & GROUNDS AREA	3-3
4.0 SCOPE OF WORK.....	4-1
5.0 TASKS/HAZARDS/ASSOCIATED CONTROL MEASURES	5-1
5.1 GENERAL SAFE WORK PRACTICES.....	5-1
5.2 DRILLING/SOIL BORING SAFE WORK PRACTICES.....	5-3
5.2.1 Before Boring/Drilling.....	5-3
5.2.2 During Boring/Drilling.....	5-3
5.2.3 After Boring/Drilling.....	5-4
5.3 SOIL BORING / CONCRETE CORING WITHIN BUILDINGS 106 AND 107	5-4
6.0 HAZARD ASSESSMENT	6-1
6.1 CHEMICAL HAZARDS.....	6-1
6.1.1 Site Specific Chemical Hazards	6-1
6.1.2 Exhaust Gases/Fumes Created During Soil Boring Activities Buildings 106/107	6-2
6.2 PHYSICAL HAZARDS.....	6-9
6.2.1 Slips, Trips and Falls	6-9
6.2.2 Cuts or Other Injuries Associated with Hand Tool Use	6-10
6.2.3 Energized Systems (Contact with Underground and Overhead utilities).....	6-10
6.2.4 Heat Stress.....	6-11
6.3 NATURAL HAZARDS	6-14
6.3.1 Insect Bites and Stings.....	6-14
6.3.2 Snakes and Other Wild Animals	6-16
6.3.3 Poisonous Plants.....	6-18
6.3.4 Inclement Weather.....	6-19
6.3.5 Working On or Near Bodies of Water	6-19

TABLE OF CONTENTS (Continued)

<u>Section</u>	<u>Page No.</u>
7.0 AIR MONITORING	7-1
7.1 INSTRUMENTS AND USE	7-1
7.1.1 Photoionization Detector or Flame Ionization Detector	7-1
7.1.2 Carbon Monoxide Detector and Colorimetric Tubes for Nitrogen Dioxide	7-1
7.1.3 Hazard Monitoring Frequency	7-2
7.2 INSTRUMENT MAINTENANCE AND CALIBRATION	7-2
7.3 DOCUMENTING INSTRUMENT READINGS	7-2
8.0 TRAINING/MEDICAL SURVEILLANCE REQUIREMENTS	8-1
8.1 INTRODUCTORY/REFRESHER/SUPERVISORY TRAINING	8-1
8.1.1 Requirements for TtNUS Personnel	8-1
8.1.2 Requirements for Subcontractors	8-1
8.2 SITE SPECIFIC TRAINING	8-3
8.3 MEDICAL SURVEILLANCE	8-3
8.3.1 Medical Surveillance Requirements for TetraTech NUS Personnel	8-3
8.3.2 Medical Surveillance Requirements for Subcontractors	8-5
8.3.3 Requirements for All Field Personnel	8-5
8.4 SUBCONTRACTOR EXCEPTION	8-5
9.0 SPILL CONTAINMENT PROGRAM	9-1
9.1 SCOPE AND APPLICATION	9-1
9.2 HAZARDOUS SOILS AND FLUIDS	9-1
9.3 POTENTIAL SPILL AREAS	9-1
9.3.1 Site Drums/Containers	9-2
9.4 LEAK AND SPILL DETECTION	9-2
9.5 PERSONNEL TRAINING AND SPILL PREVENTION	9-3
9.6 SPILL PREVENTION AND CONTAINMENT EQUIPMENT	9-3
9.7 SPILL CONTROL PLAN	9-3
10.0 SITE CONTROL	10-1
10.1 EXCLUSION ZONE	10-1
10.1.1 Exclusion Zone Clearance	10-1
10.2 CONTAMINATION REDUCTION ZONE	10-2
10.3 SUPPORT ZONE	10-2
10.4 SITE VISITORS	10-2
10.5 SITE SECURITY	10-3
10.6 SITE MAP	10-3
10.7 BUDDY SYSTEM	10-3
10.8 MATERIAL SAFETY DATA SHEET (MSDS) REQUIREMENTS	10-3
10.9 COMMUNICATION	10-4
10.10 SAFE WORK PERMITS	10-4
11.0 CONFINED SPACE ENTRY	11-1
12.0 MATERIALS AND DOCUMENTS	12-1
12.1 MATERIALS TO BE POSTED OR MAINTAINED AT THE SITE	12-1
13.0 GLOSSARY	13-1

- ATTACHMENT I – INJURY/ILLNESS PROCEDURE AND REPORT FORM
- ATTACHMENT II – MEDICAL DATA SHEET
- ATTACHMENT III – UTILITY LOCATING AND EXCAVATION CLEARANCE
- ATTACHMENT IV – EQUIPMENT INSPECTION CHECKLIST
- ATTACHMENT V – SAFE WORK PERMITS

FIGURES

<u>Figure</u>		<u>Page No.</u>
2-1	Hospital Route Map (Bedford Gate).....	2-8
2-2	Hospital Route Map (Bloomington Gate)	2-9
2-3	Emergency Response Protocol.....	2-11
7-1	Documentation of Field Calibration	7-3
8-1	Training Letter	8-2
8-2	Site Specific Training Documentation	8-4
8-3	Subcontractor Medical Approval Form.....	8-6
8-4	Medical Surveillance Letter	8-8
10-1	Safe Work Permit.....	10-6

TABLES

<u>Table</u>		<u>Page No.</u>
2-1	Emergency Reference	2-6
5-1	Tasks/Hazards/Control Measures.....	5-7
6-1	Chemical, Physical, and Toxicological Data.....	6-3
6-2	Heat Strain Symptoms	6-14

1.0 INTRODUCTION

This Health and Safety Plan (HASP) is specifically written for site activities that are to be conducted as part of the RCRA Facility Investigation at Building 106 Pond (Solid Waste Management Unit [SWMU] 8) and Roads and Grounds Area (SWMU 15) at the Naval Surface Warfare Center Crane (NSWC Crane), located in Crane, Indiana. In addition to this HASP, a copy of the Tetra Tech NUS, Inc. (TtNUS) Health and Safety Guidance Manual must be at the site to comply with the requirements stipulated in the Occupational Safety and Health Administration (OSHA) standard 29 Code of Federal Regulations (CFR) 1910.120. The guidance manual provides detailed information pertaining to the HASP as well as TtNUS standard operating procedures (SOPs).

This HASP has been developed using the latest available information regarding known or suspected chemical contaminants and potential physical hazards associated with the proposed work and site activities. This HASP will be modified if new information becomes available. Changes to the HASP will be requested through the TtNUS Health and Safety Manager (HSM) and the Task Order Manager (TOM). It is the responsibility of the TOM to notify affected personnel of changes to this HASP.

The elements of this HASP are in compliance with the requirements established by OSHA 29 CFR 1910.120, "Hazardous Waste Operations and Emergency Response" (HAZWOPER) and sections of 29 CFR 1926 "Safety and Health Regulations For Construction." The information contained in this plan, as well as policies on conducting on-site operations, have been obtained from the TtNUS Health and Safety Program.

1.1 KEY PROJECT PERSONNEL AND ORGANIZATION

This section defines responsibility for site safety and health for TtNUS and subcontractor employees engaged in on-site activities. Personnel assigned to these positions will exercise the primary responsibility for on-site health and safety. These persons will be the primary points of contact for any questions regarding the safety and health procedures and the selected control measures that are to be implemented for on-site activities.

- The TtNUS TOM is responsible for the overall direction of health and safety for this project.
- The Project Health and Safety Officer (PHSO) is responsible for developing the HASP in accordance with applicable OSHA regulations. Specific responsibilities include:

- i. providing information regarding site contaminants and physical hazards associated with the site.
 - ii. establishing air monitoring and decontamination procedures.
 - iii. assigning personal protective equipment.
 - iv. determining emergency response procedures and emergency contacts.
 - v. stipulating training requirements and reviewing appropriate training and medical surveillance certificates.
 - vi. providing standard work practices to minimize potential injuries and exposures associated with hazardous waste work.
- The TtNUS Field Operations Leader (FOL), who may also serve as the SSO, is responsible for implementation of the HASP with the assistance of an appointed Site Safety Officer (SSO). The FOL manages field activities, executes the work plan, and enforces safety procedures as applicable to the work plan.
 - The SSO supports site activities by advising the FOL on the aspects of health and safety on-site. These duties may include:
 - i. coordination of health and safety activities with the FOL.
 - ii. selecting, applying, inspecting, and maintaining personal protective equipment.
 - iii. establishing work zones and control points.
 - iv. implementing air monitoring program for on-site activities.
 - v. verification of training and medical status of on-site personnel in relation to site activities.
 - vi. implementation of hazard communication and respiratory protection programs.
 - vii. coordination of emergency services.
 - viii. providing site specific training for on-site personnel.
 - Compliance with the requirements stipulated in this HASP is monitored by the SSO and coordinated through the CLEAN Health and Safety Manager.

1.2 SITE INFORMATION AND PERSONNEL ASSIGNMENTS

Site Name: NSWC Crane

Client Contact: Mr. Thomas Brent

Address: Crane, Indiana

Phone Number: (812) 854-6160

Alternate Contact: Ms. Christine Freeman

Phone Number: (812) 854-4423

Project Team:

TtNUS Personnel:

Ralph Basinski

Matthew M. Soltis, CIH, CSP

Clyde J. Snyder

TBD

TBD

TBD

Non-TtNUS Personnel

TBD

TBD

TBD

Discipline/Tasks Assigned:

Task Order Manager (TOM)

Health and Safety Manager (HSM)

Project Health and Safety Officer (PHSO)

Field Operations Leader (FOL)

Field Technician

Site Safety Officer (SSO)

Affiliation/Discipline/Tasks Assigned

DPT Subcontractor

Drilling Subcontractor

Surveyor

Hazard Assessments (for purposes of OSHA 29 CFR 1910.132) and HASP preparation conducted by:

Clyde J. Snyder

2.0 EMERGENCY ACTION PLAN

2.1 INTRODUCTION

This section has been developed as part of a planning effort to direct and guide field personnel in the event of an emergency. In the event of on-site emergencies, which cannot be handled by on-site personnel, site personnel will be evacuated to a safe place of refuge and the appropriate emergency response agencies will be notified. It has been determined that a majority of potential emergency situations would be better supported by outside emergency responders. Based on this determination, TtNUS and subcontractor personnel will provide limited emergency response and first-aid commensurate with the level of emergency/first-aid training. Given the remote location of the site, at least two field crew members will be trained in first-aid and cardiopulmonary resuscitation (CPR). Workers who are ill or who have suffered a non-serious injury will be treated onsite to the extent possible prior to being transported by site personnel or responding emergency services to the closest available medical facility. This emergency action plan conforms to the requirements of OSHA Standard 29 CFR 1910.38(a), as allowed in OSHA 29 CFR 1910.120(l)(1)(ii).

TtNUS will through necessary services, include incidental response measures for incidents such as:

- Incipient stage fire fighting support and prevention.
- Incipient spill control and containment measures and prevention.
- Removal of personnel from emergency situations.
- Provide initial medical support for injuries or illnesses requiring only first-aid level support.
- Provide site control and security measures as necessary.

2.2 EMERGENCY PLANNING

Through the initial hazard/risk assessment effort, it has been determined that injuries or illnesses resulting from exposure to chemical or physical hazards or fire are the most probable emergencies that could be encountered during site activities.

To minimize and eliminate these potential emergency situations, emergency planning activities associated with this project include the following. The SSO and/or the FOL are responsible for:

- Coordinating with NSWCC Crane Emergency Services personnel to ensure that TtNUS emergency action activities are compatible with existing facility emergency response procedures.

- Establishing and maintaining information at the project staging area (support zone) for easy access in the event of an emergency. This information will include the following:
 - Chemical Inventory (used on-site), with Material Safety Data Sheets.
 - On-site personnel medical records (medical data sheets).
 - A logbook identifying personnel on site each day.

It will be the responsibility of the TtNUS FOL to ensure this information is available and present at the site. Other responsibilities include:

- Identifying a chain of command for emergency action.
- Educating site workers to the hazards and control measures associated with planned activities at the site, and to provide early recognition and prevention of hazards where possible.

It is understood that the use of two-way communication devices (cellular phones and radios) must be approved by the NSW Crane Safety Office and such equipment will only be used with official permission. However, TtNUS is authorized to utilize a two-way radio assigned to the Environmental Department. This radio is to be used only in the event of an emergency. It should only be activated if needed as the battery will only be charged periodically throughout the shift.

2.3 EMERGENCY RECOGNITION AND PREVENTION

2.3.1 Recognition

Foreseeable emergency situations that may be encountered during site activities will generally be recognizable by visual observation. Visual observation is primarily relevant for physical hazards that may be associated with the proposed scope of work. Visual observation will also play a role in detecting some chemical overexposures. To adequately recognize exposures to site contaminants, site personnel must have a clear knowledge of signs and symptoms of exposure associated with the site contaminants. This information is provided in Table 6-1 of this HASP. Potential site hazards, activities, and the recommended control methods are discussed in detail in Section 5.0 and 6.0 of this HASP. Early recognition of emergency situations will be supported by periodic site surveys to eliminate situations predisposed to emergencies. The FOL, and the SSO will be responsible for these periodic surveys. Site surveys will be conducted at least weekly during the initiation of this effort.

The above actions will provide early recognition for potential emergency situations. Should an incident occur, TtNUS will take defensive and offensive measures to control these situations. However, if the FOL and the SSO determines that an incident has progressed to a serious emergency situation, TtNUS will withdraw, and notify the appropriate response agencies.

2.3.2 Prevention

TtNUS and subcontractor personnel will minimize the potential for emergencies by ensuring compliance with the HASP, the Health and Safety Guidance Manual, and applicable OSHA regulations.

2.4 SAFE DISTANCES AND PLACES OF REFUGE

In the event that the site must be evacuated, personnel will immediately stop activities and report to the designated point in the support zone. Telephone communication points and safe places of refuge will be identified prior to the commencement of site activities and will be conveyed to personnel as part of the daily safety meeting conducted each morning. During an evacuation, personnel reporting to the refuge location will remain there until directed otherwise by the TtNUS FOL. The FOL or the SSO will take a head count of site personnel at this location to account for and to confirm the location of site personnel. The site logbook will be used to verify and record the head count. Emergency response personnel will be immediately notified of any unaccounted personnel.

2.5 EVACUATION ROUTES AND PROCEDURES

An evacuation will be initiated whenever severe weather is encountered, a fire or explosion occurs, on monitoring instrumentation action levels are reached, or if personnel show signs or symptoms of overexposure. In the event of an evacuation, personnel will proceed immediately to the designated place of refuge in the support zone. If doing so would further jeopardize the welfare of workers, personnel will proceed to a designated alternate location and remain until notified by the TtNUS FOL. In both situations workers will remain until notified by the FOL.

Evacuation procedures will be discussed prior to the initiation of any work at the site. Evacuation routes from the site and safe places of refuge are dependent upon the location at which work is being performed and the circumstances under which an evacuation is required. Additionally, site location and meteorological conditions (i.e., wind speed and direction) may dictate evacuation routes. As a result, assembly points will be selected and communicated to the workers relative to the site location where work is being performed.

2.6 DECONTAMINATION PROCEDURES

During an evacuation, decontamination procedures will be performed only if doing so does not further jeopardize the welfare of site workers. Decontamination will not be performed if the action that initiates an evacuation would further endanger the lives of workers if workers were to perform decontamination procedures. However, it is unlikely that an evacuation would occur at this site which would require workers to evacuate the site without first performing decontamination procedures.

2.7 EMERGENCY ALERTING AND ACTION/RESPONSE PROCEDURES

Because TtNUS personnel will generally be working in close proximity to each other, hand signals, voice commands, and air horns, will be sufficient to alert site personnel of an emergency.

If site personnel will be working in remote locations or if site activities are conducted in separate sites simultaneously, two-way radios will be used to communicate between teams of workers. In areas where radios do not work or site personnel are not in close proximity a check in procedure will be established.

- Site personnel will check in with the site FOL every 3 hours.
- A daily activities log will be established and kept in the TtNUS field office. The list will include the location of all Crane TtNUS field personnel for that day.
- TtNUS personnel will only work in those assigned locations. Deviation from the established work schedule will only be granted with the approval of the TtNUS FOL.
- When work is completed at the assigned location/s TtNUS field personnel will return to the TtNUS field office for further assignment.

Note: TtNUS personnel will sign-out a base environmental radio for weekends at a minimum. If available, radios should be utilized during the entire work shift due to the remote location of most work sites. This will give field personnel direct access to base emergency personnel 24 hours a day 7 days a week. A procedure for radio use will be established by field personnel and NSWC Crane officials.

If an emergency occurs on Base, the following procedures are to be initiated:

- Initiate an evacuation by hand signals, voice commands, air horn, or two-way radios. Report to the designated refuge assembly point in the support zone.
- Describe to the FOL (who will serve as the Incident Coordinator) what has occurred and as many details as possible. Once personnel are evacuated, incipient response procedures will be enacted to control the situation.

In the event that site personnel cannot control the incident through offensive and defensive measures, the FOL and SSO will enact the emergency notification procedures to secure additional outside assistance in the following manner:

- On base call the Base Emergency Number or other emergency contacts (Table 2-1) and report the emergency. Describe to the emergency operator the location of the emergency, the type of emergency, the number of injured, and a brief account of what occurred. Stay on the phone and follow the instructions given by the operator. The operator will then notify and dispatch the proper emergency response agencies.
- Conduct a head count of site personnel using the site logbook.

2.8 PPE AND EMERGENCY EQUIPMENT

A first aid kit, eye wash units, and fire extinguishers (strategically placed) will be maintained on-site and shall be immediately available for use in the event of an emergency.

2.9 EMERGENCY CONTACTS

Prior to performing work at any of the sites, personnel will be thoroughly briefed on the emergency procedures to be followed in the event of an accident. A mobile phone may be available on site. Table 2-1 provides a list of emergency contacts and their associated telephone numbers. This table must be posted on site where it is readily available to site personnel.

TABLE 2-1
EMERGENCY REFERENCE
NSWC CRANE, INDIANA

AGENCY	TELEPHONE
Base Emergency Number (Fire Department, Base Security, Ambulance) <ul style="list-style-type: none"> • If dialing from an on-base phone: • If dialing from cell or off-base phone: 	911 854-3300 or 854-1333
Base Environmental Office	(812) 854-3114
Railroad Dispatch (for access/clearance to R.R. Tracks)	(812) 854-1613
Bedford Ambulance	(812) 279-6545
Bloomington Hospital (Bloomington, IN)	(812) 336-9515
Hospital, Bedford Medical Center (Bedford, IN)	(812) 275-1200
Poison Control Center	(800)-222-1222
National Response Center	(800)-424-8802
Base Contact, Thomas Brent	(812) 854-6160
Alternate Base Contact, Christine Freeman	(812) 854-4423
Task Order Manager, Ralph Basinski	(412) 921-8308
TtNUS Crane Field Office Building 3245	(812) 854-0280
Field Operations Leader, TBD On-Site Off-Site (Pittsburgh)	TBD
TtNUS Office, Pittsburgh	(412) 921-7090
CLEAN Health and Safety Manager, Matthew M. Soltis, CIH, CSP	(412) 921-8912
Project Health and Safety Officer, Clyde J. Snyder	(412) 921-8904

Note: Most on-base phones require the number to be preceded by 991 (e.g., 991-812-854-0280) or by "99" (if 812 is left off) (e.g., 99-854-0280)

***NOTE:** Emergencies involving site activities should subsequently be reported to the Environmental Protection Department (x-3114/1132/6160).

2.10 EMERGENCY ROUTES TO HOSPITALS

Directions to Bedford Regional Medical Center* See Figure 2-1 Bedford Regional Medical Center Route Map (Bedford Gate)

The Bedford Gate is open only from 0600 to 0830 and 1500 to 1800 hours. Exit the base on H-58, through the Bedford Gate. Head East on State Highway 158. State Highway 158 becomes 16th Street upon entering the City of Bedford. The medical center is on the right shortly after Plaza Drive. (2900 16th Street)

Directions to the Bloomington Hospital** See Figure 2-2 Hospital Route Map (Bloomington Gate)

The Bloomington Gate is open 24 hours. Exit NSWC Crane on H-45 through the Bloomington gate. Follow Highway 45 North to Bloomington at Highway 45 and Highway 37. Continue going straight over the overpass (Bloomfield Road). Follow Bloomfield Road North; this road turns into 2nd Street. Follow 2nd Street, hospital will be on the right (601 West 2nd Street)

FIGURE 2-1
Bedford Regional Medical Center Route Map (Bedford Gate)

*Note: The Bedford Gate is open only from 0600 - 0830 and 1500 - 1800 hours.




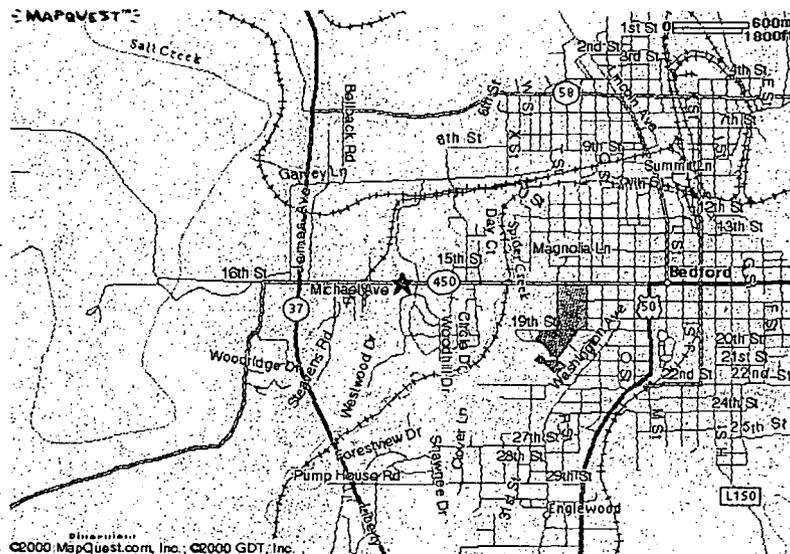


FIGURE 2-2
Bloomington Hospital Route Map (Bloomington Gate)

****Note: The Bloomington Gate is open 24 hours.**

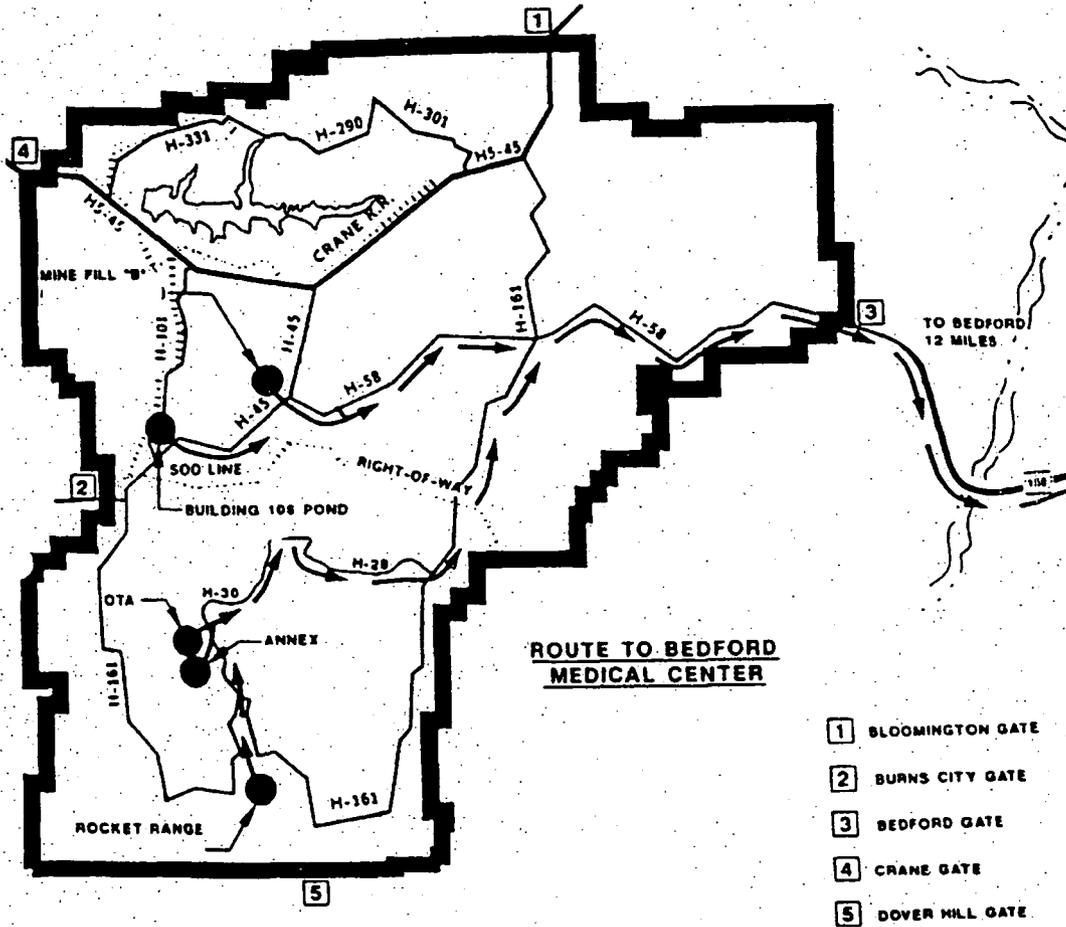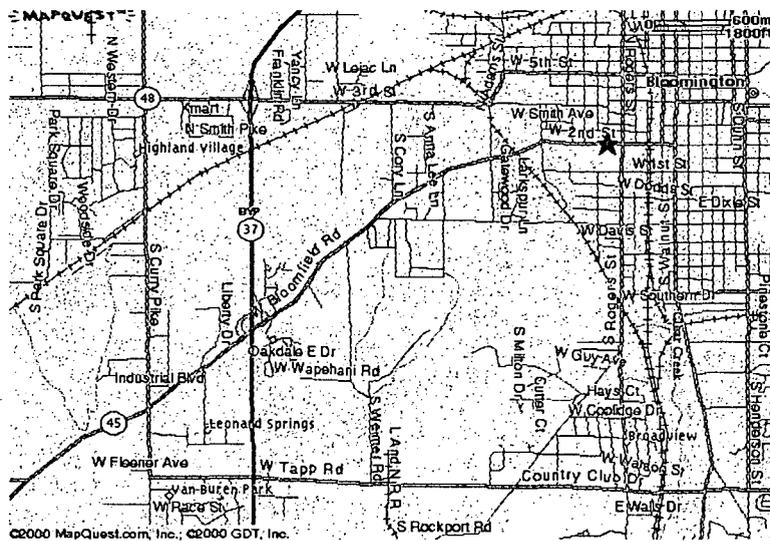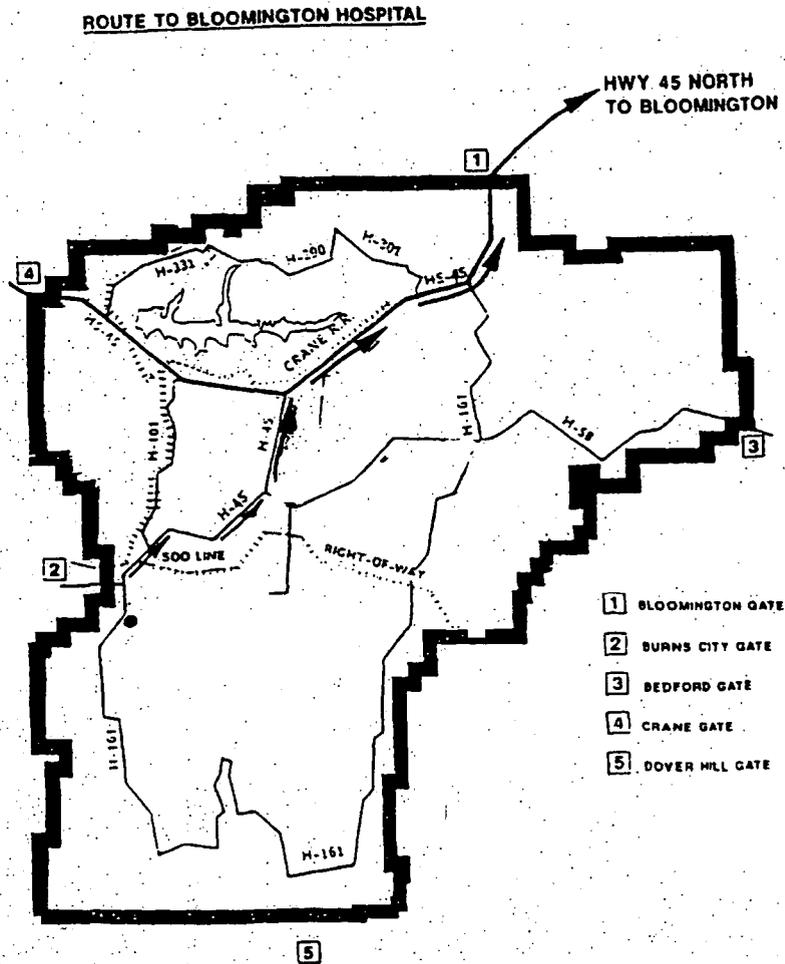

2.11 INJURY/ILLNESS REPORTING

If any TtNUS personnel are injured or develop an illness as a result of working on site, the TtNUS "Injury/Illness Procedure" (Attachment I) must be followed. Following this procedure is necessary for documenting the information obtained at the time of the incident.

Any pertinent information regarding allergies to medications or other special conditions will be provided to medical service personnel. This information is listed on Medical Data Sheets (Attachment II) filed onsite. If an exposure to hazardous materials has occurred, provide information on the chemical, physical, and toxicological properties of the subject chemical(s) to medical service personnel.

TtNUS personnel who are injured or become ill on the job must notify appropriate company representatives. Figure 2-3 presents the procedure for reporting an injury/illness, and the form to use for this purpose. **If the emergency involves personnel exposures to chemicals, follow the steps in Figure 2-3:**

**FIGURE 2-3
EMERGENCY RESPONSE PROTOCOL**

The purpose of this protocol is to provide guidance for the medical management of injury situations.

In the event of a personnel injury or accident:

- Rescue, when necessary, employing proper equipment and methods.
- Give attention to emergency health problems -- breathing, cardiac function, bleeding, and shock.
- Transfer the victim to the medical facility designated in this HASP by suitable and appropriate conveyance (i.e. ambulance for serious events)
- Obtain as much exposure history as possible (a Potential Exposure report is attached).
- If the injured person is a TtNUS employee, call the medical facility and advise them that the patient(s) is/are being sent and that they can anticipate a call from the WorkCare physician. WorkCare will contact the medical facility and request specific testing which may be appropriate. WorkCare physicians will monitor the care of the victim. Site officers and personnel should not attempt to get this information, as this activity leads to confusion and misunderstanding.
- Call WorkCare at 1-800-455-6155 and enter Extension 109, or follow the voice prompt for after hours and weekend notification and be prepared to provide:
 - Any known information about the nature of the injury.
 - As much of the exposure history as was feasible to determine in the time allowed.
 - Name and phone number of the medical facility to which the victim(s) has/have been taken.
 - Name(s) of the involved TtNUS, Inc. employee(s).
 - Name and phone number of an informed site officer who will be responsible for further investigations.
 - Fax appropriate information to WorkCare at (714) 456-2154.
- Contact Corporate Health and Safety Department (Matt Soltis) and Corporate Human Resources Manager Marilyn Diethorn Duffy at 1-800-245-2730.
- As data is gathered and the scenario becomes more clearly defined, this information should be forwarded to WorkCare.

WorkCare will compile the results of data and provide a summary report of the incident. A copy of this report will be placed in each victim's medical file in addition to being distributed to appropriately designated company officials.

Each involved worker will receive a letter describing the incident but deleting any personal or individual comments. A personalized letter describing the individual findings/results will accompany this generalized summary. A copy of the personal letter will be filed in the continuing medical file maintained by WorkCare.

FIGURE 2-3 (continued)
WORKCARE
POTENTIAL EXPOSURE REPORT

Name: _____ Date of Exposure: _____

Social Security No.: _____ Age: _____ Sex: _____

Client Contact: _____ Phone No.: _____

Company Name: _____

I. Exposing Agent

Name of Product or Chemicals (if known): _____

Characteristics (if the name is not known)

Solid Liquid Gas Fume Mist Vapor

II. Dose Determinants

What was individual doing? _____

How long did individual work in area before signs/symptoms developed? _____

Was protective gear being used? If yes, what was the PPE? _____

Was there skin contact? _____

Was the exposing agent inhaled? _____

Were other persons exposed? If yes, did they experience symptoms? _____

III. Signs and Symptoms (check off appropriate symptoms)

Immediately With Exposure:

Burning of eyes, nose, or throat
Tearing
Headache
Cough
Shortness of Breath

Chest Tightness / Pressure
Nausea / Vomiting
Dizziness
Weakness

Delayed Symptoms:

Weakness
Nausea / Vomiting
Shortness of Breath
Cough

Loss of Appetite
Abdominal Pain
Headache
Numbness / Tingling

IV. Present Status of Symptoms (check off appropriate symptoms)

Burning of eyes, nose, or throat
Tearing
Headache
Cough
Shortness of Breath
Chest Tightness / Pressure
Cyanosis

Nausea / Vomiting
Dizziness
Weakness
Loss of Appetite
Abdominal Pain
Numbness / Tingling

Have symptoms: (please check off appropriate response and give duration of symptoms)

Improved: _____ Worsened: _____ Remained Unchanged: _____

V. Treatment of Symptoms (check off appropriate response)

None: _____ Self-Medicating: _____ Physician Treated: _____

3.0 SITE BACKGROUND

This section provides information pertaining to NSWC Crane and the sites that are to be investigated. This information will be revised if additional information becomes available or if additional sites are going to be investigated.

3.1 SITE HISTORY

NSWC Crane is located in Crane, Indiana approximately 75 miles southwest of Indianapolis and 71 miles northwest of Louisville, Kentucky. The facility encompasses approximately 100 square miles (64,463 acres) in Daviess, Greene, Lawrence, and Martin Counties. It is located in a rural, sparsely populated area. The acreage surrounding the base is either wooded or farmed land.

3.2 SWMU 8, BUILDING 106 POND AREA

SWMU 8 is located north and west of Boggs Creek in the west-central half of NSWC Crane. The Building 106 Pond is located in the southeastern corner of the SWMU. The pond is an unlined surface impoundment for wastewater that was generated in Buildings 106 and 107 where casings were overhauled.

Building 106 used a cleaning process that consisted of a caustic wash, a degreaser, and an acid wash. Spent shell casings were brushed clean, soaked in a hot caustic bath, and degreased with Trichloroethylene (TCE) followed by a 3-minute hydrochloric acid (HCl) soaking.

In 1983, Building 107 activities included refinishing of wooden and metal boxes. The box refinishing process consisted of four steps: cleaning/degreasing, grit blasting, priming and painting, and oven drying.

For metal boxes, the cleaning portion of the process utilized approximately 712 gallons of TCE per year.

For wooden boxes, there was an additional step, treatment with pentachlorophenol (PCP). The PCP treatment step consisted of dipping the wooden boxes in a 5-percent solution of PCP in a "dip tank" for 5 minutes followed by partial drying of the boxes in a "dip pan." Approximately 8,800 gallons of PCP was used annually.

Although no supporting documentation could be found, facility personnel indicated that in the mid-1970s, phosphatizing of steel was conducted in Building 106. The phosphatizing process, applying of a zinc phosphate coating to the projectiles, consisted of the following five steps: degreasing, rinsing

phosphatizing, cold water rinse, and conditioning rinse. The conditioning rinse was a dilute solution of either chromic acid or chromic and phosphoric acids.

Activities at Buildings 106 and 107 included the application of coatings in two paint booths. Paint Booth Number 1 applied a zinc chromate coating containing 40 percent toluene. Paint Booth Number 2 applied an olive drab coating containing 22 percent naphtha. Each paint booth utilized approximately 500 gallons of coating material per year.

Prior to 1972, untreated wastewater from the cleaning processes in Buildings 106 and 107 was discharged into the Building 106 Pond. Sometime after 1972, the Building 106 Pond was connected to a neutralizing system that subsequently discharged into a sanitary sewer system. Reported malfunctions of the pumping system have caused the Building 106 Pond to overflow. Additionally, it has been reported that the discharge from this pretreatment system exhibited high pH and contained explosives, heavy metals, oil, and grease. Furthermore, it was reported that oil was released into the ditch located between Buildings 106 and 107 when oily water from a compressor in Building 107 leaked and flowed through a floor drain into a clay storm drain pipe leading to the ditch.

In 1985, two soil samples were analyzed for heavy metals utilizing the EP toxicity test and for TCE and oil/grease. All concentrations were less than the hazardous waste classification levels. No other historical soil, surface water, ground water, or sediment sampling has been performed at SWMU 8. Raw sewage might have been released at this site as well.

A former drum storage area was located to the south of Building 106 in an open area. Information is not available on the nature of the materials that were stored in the drums. It is believed that the drums stored contained metal and organic wastes.

The primary contaminant release pathways and deposition mechanisms associated with SWMU 8 are as follows:

- Floor drainage from the Building 106 caustic washing process (including caustic wash, TCE degreaser, and hydrochloric acid rinse) flowed into the Building 106 Pond.
- Floor drainage from the Building 106 paint booths [including zinc chromate and olive drab coatings that contained methyl ethyl ketone (MEK), toluene, naphtha, and xylenes] flowed into the Building 106 Pond.

- Floor drainage from the Building 107 metal and wooden box refinishing process (including baghouse dust, PCP, selenium, TCE, zinc phosphate, chromium, phosphoric acid, and boric acid) flowed into the Building 106 Pond.
- Overflow from the metal and wooden box refinishing flocculant tank into the Building 107 floor drainage flowed into the Building 106 Pond. This overflow included aluminum in nitric acid and solutions that potentially contained lead and selenium.
- Overflow from the Building 106 Pond onto surface soil and into sediment, potentially affected underlying subsurface soil and ground water.
- Overflow of stored oil used in weapons coating at Buildings 106 or 107 flowed into the Building 106 Pond.
- Floor drainage from energetics associated with reported load and fill operations at Buildings 106 and 107 flowed into the Building 106 Pond.
- Floor drainage from oil storage overflow at Buildings 106 or 107 flowed into the Building 106 Pond.
- Spills or leaching from drums potentially containing metals, organic solvents and fuels, pesticides, herbicides, and PCBs to surface soil are suspected.

These release pathways and deposition mechanisms affect primarily surface soils. Contaminants in surface soils and pond sediment may have migrated into subsurface soils. Contaminated surface soil and contaminated pond water overflow may also have migrated into site drainage channels and ultimately into Boggs Creek. Surface water may have been contaminated via contact with contaminated surface soils and pond water. Subsurface soils could release contaminants to ground water.

The chemicals or chemical mixtures potentially released at SMWU 8 fall primarily into three categories: caustics, organics, and metals. Caustics could be a concern because of the potential use in Building 106 caustic wash cleaning process. VOCs, SVOCs, and metals could be a concern because of potential use at Buildings 106 and 107.

3.3 SWMU 15, ROADS AND GROUNDS AREA

SWMU 15 is located west of Turkey Creek in the northern half of NSWC Crane. A parking area and a Pyrotechnics Production Area are located west of the SWMU. An instrumentation calibration and repair building is located south of the SWMU, and inert and open storage areas are located north of the SWMU.

There was a 5,000-gallon aboveground storage tank (AST) along the north side of the former boiler house, Building 2801. Approximately, 10,000 gallons of waste oil were removed annually from this AST.

An asphalt batch plant with unknown operational history was removed in the early 1970s. At this asphalt batch plant, tar was heated to a liquid and stored in tanks with steam coils. The batch plant spanned two ground elevations. Liquid tar from the USTs in the upper level flowed by gravity to ASTs on the lower level. The liquid tar was then used in the asphalt batching process.

Discharges from the storage tanks included the boiling over of asphalt and the accidental discharges associated with transfer and storage at the liquid asphalt. Liquid tar from spills was reported to have flowed as far as the drainageway between Buildings 2693 and 2801.

Although it is presumed that maintenance activities took place at this SWMU, a description of the maintenance was not available. However, it is known that materials and wastes handled at this SWMU included: waste oils, fuel oils, antifreeze, hydraulic oils, pesticides, herbicides, paints, lubricants, solvents, and general refuse (e.g., drums, containers, construction debris).

The primary contaminant release and migration mechanisms and pathways for SWMU 15 are as follows:

- AOC A, Former Asphalt Batch Plant - spills of asphalt process materials onto surface soils from the batch plant operations are known to have occurred. This could have resulted in releases of SVOCs and VOCs to soil with subsequent migration to ground water, surface water, and sediment. Metals and other types of chemicals are not expected to have been released in this area.
- AOC B, Former UST and Gasoline Pump Area - spills of leaded gasoline from the UST to subsurface soil are suspected due to a petroleum-type odor during previous excavations in this area. This could have resulted in releases of SVOCs and VOCs to soil with subsequent migration to ground water, surface water, and sediment. Metals (e.g., lead released as tetraethyl lead in gasoline) may not have migrated as readily as SVOCs and VOCs.
- AOC C, Former AST near former Building 2801 - spills to surface soil of waste oil potentially containing PCBs are suspected from the former AST. Organic solvent storage also allegedly occurred in this area. Chemicals that may have been released would be limited primarily to SVOCs, VOCs, and potentially related chemicals such as PCBs, with migration to other downgradient media. PCBs, however, are very insoluble and not likely to be dissolved in ground water.

- AOC D, Former Inert Storage (Building 2716) - pesticide and herbicide leakage to surface soil is suspected from pesticide and herbicide paper bag storage in this area.
- AOC E, Former Wash Rack(s) and Paint House (Building 2774) - spills to surface soil from the washdown of equipment which potentially contained metals, pesticides, herbicides, solvents, and PCBs, as well as from the Former Asphalt Batch Plant, are suspected in this area.
- AOC F, Former AST Areas (Former Buildings 2717 and 2718) - spills to surface soil from oil storage tanks are suspected.
- AOC G, Hillside Debris Area South of Former Buildings 2717 and 2718 - spills or leaching from debris potentially containing metals, organic solvents and fuels, pesticides, herbicides, and PCBs to surface soil are suspected.
- AOC H, Drainage Area Across Intermittent Stream South of AOC G - spills or leaching from debris potentially containing metals, organic solvents and fuels, pesticides, herbicides, PCBs, and cyanide to surface soil are suspected. The cyanide may have been released from plating operations upstream of the SWMU.
- AOC I, Drainage Channels Downgradient of Source Areas - spills to surface soil can migrate downgradient via sediment, surface water, and ground water, potentially containing all potential site contaminants (metals, VOCs, SVOCs, pesticides, herbicides, PCBs, and cyanide).
- AOC J, Areas Upgradient of the Sources - background samples for sediment, surface water, and ground water will be analyzed for all potential site contaminants (metals, VOCs, SVOCs, pesticides, herbicides, PCBs, and cyanide).
- AOC K, Catch Basin West of Roadway along the western side of Building 3330 - background samples for sediment and surface water will be analyzed for all potential site contaminants (metals, VOCs, SVOCs, pesticides, herbicides, PCBs, and cyanide).
- AOC L, Drainageway Southeast of Former Asphalt Batch Plant - spills of asphalt process materials onto surface soils from the batch plant operations are known to have occurred and might have migrated to the drainageway.

- AOC M, Drainageway along the Southern Area of SWMU 15 - spills from wash rack activities onto surface soil might migrate to the drainageway and may have contained metals, pesticides, herbicides, solvents, and PCBs.
- AOC N, Catch Basin South of Former Asphalt Batch Plant - spills of asphalt process materials onto surface soils from the batch plant operations are known to have occurred and might have migrated to the catch basin.
- AOC O, Former Paint Locker - spills onto surface soil from paint and resin storage areas are suspected in this area. The paint and resin may have contained metals.
- AOC P, Catch Basin West of Building 3330 - background samples for sediment and surface water will be analyzed for all potential site contaminants (metals, pesticides, herbicides, PCBs, VOCs, and cyanide).
- AOC Q, Drainageway South of Former UST and Former Gasoline Pump Area - spills of leaded gasoline from UST(s) into subsurface soil with a potential to migrate into sediment ground water and surface water are suspected due to a petroleum-type odor during previous excavations in this area.
- AOC R, Drainageway Southwest of Former Wash Rack - spills from wash rack activities onto surface soil might migrate to the drainageway. The wash waters may have contained metals, pesticides, herbicides, solvents, and PCBs.
- AOC S, Catch Basin at the Intersection of Two Storm Sewers West of the Center of Building 3330 - background samples for sediment and surface water will be analyzed for all potential site contaminants (metals, VOCs, SVOCs, pesticides, herbicides, PCBs, and cyanide).
- AOC T, Storm Water Drop Box/Junction Box Northwest of Former Wash Rack - spills from wash rack activities onto surface soil might migrate to the drainageway. The wash waters may have contained metals, pesticides, herbicides, solvents, and PCBs. This location is upgradient of other monitoring points.
- AOC U, Hillside Debris Area Northeast of SWMU 15 - spills to surface soil or leaching from debris potentially containing metals, pesticides, herbicides, PCBs, and solvents containing VOCs or SVOCs are suspected.

- AOC V, Intermittent Stream Banks South and East of SWMU 15 - spills to surface soil can flow or migrate downgradient via sediment, surface water, and ground water and may potentially contain all potential site contaminants (metals, VOCs, SVOCs, pesticides, herbicides, PCBs, and cyanide).

These deposition mechanisms would primarily have resulted in release to surface soils and catch basins. Releases from USTs would have been to subsurface soils. Contaminants in surface soils may have migrated into the subsurface. Surface water may be contaminated via contact with contaminated surface soils and sediments or via the discharge of contaminated ground water as seeps or springs. Subsurface soils could release contaminants to ground water, and ground water could release contaminants to subsurface soils.

The chemicals or chemical mixtures potentially released at SMWU 15 generally fall into four categories: inorganics; SVOCs, VOCs, and herbicides/pesticides.

4.0 SCOPE OF WORK

This section discusses the activities that are to be performed at the site. Table 5-1 of this HASP provides information related to each of the tasks that are to be performed as part of the scope of work conducted at the site. As new phases or tasks are to be performed at the site, Table 5-1 will be modified accordingly. If tasks other than those presented below are performed at the site, this section will be modified accordingly.

The Field Investigation will consist of the following tasks:

- Mobilization/Demobilization
- Soil boring activities will include direct push technology (DPT)
- Soil boring and/or concrete coring within Buildings 106 and 107
- Installation of monitoring wells using hollow stem auguring (HSA) or other drilling techniques¹
- Multi-media sampling including:
 - Surface and subsurface soils
 - Groundwater
 - Surface water and sediment
- Decontamination of sampling and heavy equipment
- Investigative Derived Waste (IDW) Management
- Geographical surveying
- Bathymetry Survey Bldg. 106 Pond (April 2006).

¹ New monitoring wells to be installed at SWMUs 8 and 15 will be determined as part of subsequent rounds of this RFI. This HASP will be modified prior to Round 2 site activities to provide updated information related to potential site contaminants and drilling-specific hazards.

5.0 TASKS/HAZARDS/ASSOCIATED CONTROL MEASURES

Table 5-1 of this section serves as the primary portion of the site specific HASP which identifies the tasks that are to be performed as part of the scope of work. The anticipated hazards, recommended control measures, air monitoring recommendations, required Personal Protective Equipment (PPE), and decontamination measures for each site task are discussed in detail. This table and the associated control measures will be revised, if the scope of work, contaminants of concern or other conditions change.

Through using the table, site personnel can determine which hazards are associated with each task and at each site, and what associated control measures are necessary to minimize potential exposure or injuries related to those hazards. The table also assists field team members in determining which PPE and decontamination procedures to use based on proper air monitoring techniques and site-specific conditions.

The Health and Safety Guidance Manual must accompany this table and the HASP. This will require the FOL to obtain and maintain a Guidance manual on site. The manual is designed to further explain supporting programs and elements for other site-specific aspects as required by 29 CFR 1910.120. The guidance manual should be referenced for additional information regarding air monitoring instrumentation, decontamination activities, emergency response, hazard assessments, hazard communication and hearing conservation programs, medical surveillance, PPE, respiratory protection, site control measures, standard work practices, and training requirements. Many of TtNUS' SOPs are also provided in this guidance manual.

Safe Work Permits issued for site activities (See Section 10.10) will use elements defined in Table 5-1 as the primary reference. The FOL or the SSO completing the safe work permit will add additional site-specific information. In situations where the safe work permit is more conservative than the direction provided in Table 5-1 due to the incorporation of site-specific elements, the safe work permit will be followed.

5.1 GENERAL SAFE WORK PRACTICES

In addition to the task-specific work practices identified on Table 5-1, the following safe work practices will be observed when conducting work involving known and unknown site hazards. These safe work practices establish a pattern of general precautions and measures for reducing risks associated with hazardous site operations.

- Limited analytical data exists for many of the investigation areas. Assume media (soil, groundwater, surface water, sediments) are contaminated and implement controls specified within this plan to minimize the potential for exposure.
- Refrain from eating, drinking, chewing gum or tobacco, taking medication, or smoking in contaminated or potentially contaminated areas or where the possibility for the transfer of contamination exists.
- Wash hands and face thoroughly upon leaving a contaminated or suspected contaminated area. A thorough shower and washing must be conducted as soon as possible if excessive skin contamination occurs.
- Avoid contact with potentially contaminated substances by walking around puddles, pools, mud, or other such areas. Avoid, whenever possible, kneeling on the ground-free or leaning or sitting on equipment. Place monitoring equipment on contaminated surfaces.
- Be familiar with and adhere to the instructions in this site-specific HASP.
- Be aware of the location of the nearest telephone and all emergency telephone numbers. See Section 2.0, Table 2-1.
- Attend briefings on anticipated hazards, equipment requirements, Safe Work Permits, emergency procedures, and communication methods before going on site.
- Plan and mark entrance, exit, and emergency escape routes. See Section 2.0.
- Rehearse unfamiliar operations prior to implementation.
- Maintain visual contact with each other and with other on-site team members by remaining in close proximity in order to assist each other in case of emergency.
- Establish appropriate Safety Zones including Support, Contamination Reduction, and Exclusion Zones.
- Minimize the number of personnel and equipment in contaminated areas (such as the Exclusion Zone). Non-essential vehicles and equipment should remain within the Support Zone.
- Establish appropriate decontamination procedures for leaving the site.
- Immediately report all injuries, illnesses, and unsafe conditions, practices, and equipment to the Site Safety Officer (SSO).

- Observe coworkers for signs of toxic exposure and heat or cold stress.
- Inform co-workers of potential symptoms of illness, such as headaches, dizziness, nausea, or blurred vision.

5.2 DRILLING/SOIL BORING SAFE WORK PRACTICES

The following safe work practices will be followed when working around DPT and/or drilling operations. Drilling and installation of monitoring wells will be conducted during future rounds of sampling at SWMUs 8 and 15. This HASP will be modified to provide specific safe work practices associated with the type of drilling that is to be performed and given updated analytical data regarding site contaminants.

5.2.1 Before Boring/Drilling

- Identify underground utilities and buried structures before intrusive operations are performed. Use the Utility Locating and Excavation Clearance Standard Operating Procedure provided in Attachment III.
- All heavy equipment (DPT/drill rigs) will be inspected by a Competent Person (the SSO or designee), prior to the acceptance of the equipment at the site and prior to the use of the equipment. Repairs or deficiencies identified will be corrected prior to use. The inspection will be accomplished using the Equipment Inspection Checklist provided in Attachment IV. Inspection frequencies will be once every 10-day shift or following repairs.
- The driller's helper will establish an equipment staging and lay down area plan. The purpose of this is to keep the work area clear of clutter and slips, trips, and fall hazards. Mechanisms to secure heavy objects such as drill flights will be provided to avoid the collapse stacked equipment.
- Potentially contaminated tooling will be wrapped in polyethylene sheeting for storage and transport to the centrally located decontamination unit.
- One employee will be designated by the driller as the individual with primary responsibility for immediate activation of emergency stop devices in the event of an emergency.
- Prior to engaging boring/drilling equipment, the equipment operator will ensure all workers are clear of moving parts and will verbally alert all workers in the vicinity of moving equipment.

5.2.2 During Boring/Drilling

- Minimize contact to the extent possible with contaminated tooling and environmental media.

- Support functions (sampling and screening stations) will be maintained a minimum distance from the DPT/drill rig equal to the height of the mast plus five feet to remove these activities from within physical hazard boundaries.
- Only qualified operators and knowledgeable ground crew personnel will participate in the operation of the DPT/drill rig.
- In order to minimize contact with potentially contaminated tooling and media and to minimize lifting hazards, multiple personnel should move auger flights and other heavy tooling.
- Only personnel absolutely essential to the work activity will be allowed in the exclusion zone. Site visitors will be escorted at all times.

5.2.3 After Boring/Drilling

- Equipment used within the exclusion zone will undergo a complete decontamination and evaluation by the SSO to determine cleanliness prior to moving to the next location, exiting the site, or prior to down time for maintenance.
- Motorized equipment will be fueled prior to the commencement of the day's activities. During fueling operations all equipment will be shut down and bonded to the fuel provider.
- When not in use all DPT/ drill rigs will be shut down, and emergency brakes set. Drill rigs will have their wheels chocked to assist in controlling movement.
- Areas subjected to subsurface investigative methods will be restored to equal or better condition than original to remove any contamination brought to the surface and to remove any physical hazards. In situations where these hazards cannot be removed these areas will be barricaded to minimize the impact on field crews working in the area.

5.3 **SOIL BORING / CONCRETE CORING WITHIN BUILDINGS 106 AND 107**

Approximately thirty one boring and sampling locations are present within and around Buildings 106 and 107. Soil samples at these locations will be obtained using a diesel powered DPT rig. If necessary, a gasoline powered concrete coring machine will be used if the DPT rig cannot push through the concrete floor.

Operation of diesel/gasoline powered equipment within enclosed areas such as Buildings 106 and 107 presents unique hazards particularly the inhalation of exhaust gasses, fumes, and dusts generated during concrete coring or soil boring. Additional hazards that may be present during these operations include, increased noise levels, contact with utilities, electrocution hazards (particularly if water is present), and the movement of heavy equipment.

The major gaseous products of both diesel and gasoline fueled engines are carbon monoxide and water, but lower percentages of carbon monoxide, sulfur dioxide, and nitrogen dioxides as well as low molecular weight hydrocarbons and their derivatives are also formed. Submicron-size particles are present in the exhaust emissions of internal combustion engines. The particles present in diesel engine exhaust are composed mainly of elemental carbon, adsorbed organic material, and traces of metallic compounds. The particles emitted from gasoline engines are composed primarily of metallic compounds, elemental carbon and adsorbed organic material. However, the composition and quantity of the emissions from an engine depend mainly on the type and condition of the engine, fuel composition and additives, operating conditions, and emission control devices.

Short-term (acute) effects of workers exposed to high concentrations of exhaust gasses/fumes may include irritation of the eyes, nose, and throat; lightheadedness; heartburn; headache; weakness, numbness and tingling in the extremities; chest tightness; wheezing; and vomiting. Although there have been relatively few studies on the long-term health effects of exhaust gasses/fumes, the available studies indicate that they can be harmful to your health. According to the National Institute for Occupational Safety and Health (NIOSH), human and animal studies show that diesel/gasoline exhaust should be treated as a human carcinogen. Exposure to diesel/gasoline exhaust in combination with other cancer causing substances may increase your risk of developing lung or other forms of cancer. Some studies have suggested that workers exposed to diesel/gasoline exhaust are more likely to have chronic respiratory symptoms such as persistent cough and mucous, bronchitis, and reduced lung capacity than unexposed workers.

The follow controls may be used to minimize potential exposures to exhaust gases/fumes:

- Use flexible tailpipe or stack exhaust hoses to vent equipment exhaust gases/fumes to the outside.
- Use of general ventilation (roof vents, open doors and windows, roof fans, rollup doors, floor fans, etc.) to move air through the work area to facilitate dilution of airborne exhaust gases/fumes. If exhaust gas/fume concentrations cannot be diluted with existing general ventilation methods, use local exhaust ventilation devices (portable axial blowers, coppus blowers) to vent exhaust gases/fumes to the outside.

- If feasible, use grade 1K diesel fuels which burns more clearly than diesel 1 fuels.
- All equipment must have regular maintenance and frequent tune ups including checks of the exhaust system to determine if leaks exist. All equipment will be inspected using the Equipment Inspection Checklist provided in Attachment IV.
- Prolonged idling of machinery should be avoided.
- Minimize the number of personnel in the area where internal combustion engines are operating. Observe workers for signs and symptoms of exposure.
- Monitor the work area for airborne concentrations of carbon monoxide which will be used to control exposures to carbon monoxide and other exhaust gases – follow established action levels.
- Use wetting methods to suppress airborne dusts generated during concrete coring or soil boring within the building.

**TABLE 5-1
TASKS/HAZARDS/CONTROL MEASURES
NAVAL SURFACE WARFARE CENTER CRANE DIVISION, CRANE, INDIANA**

Tasks/Operation/ Locations	Anticipated Hazards	Recommended Control Measures	Hazard Monitoring	Personal Protective Equipment <i>(Items in italics are deemed optional as conditions or the FOL or SSO require.)</i>	Decontamination Procedures
Mobilization/ Demobilization	<p>Physical hazards:</p> <ol style="list-style-type: none"> 1) Lifting (strain/muscle pulls) 2) Pinches and compressions 3) Slips, trips, and falls 4) Heavy equipment hazards (rotating equipment, hydraulic lines, etc.) 5) Vehicular and foot traffic 6) Ambient temperature extremes (cold/heat stress) <p>Natural hazards:</p> <ol style="list-style-type: none"> 7) Insect/animal bites and stings, poisonous plants, etc. 8) Inclement weather 	<ol style="list-style-type: none"> 1) Use machinery or multiple personnel for heavy lifts. Use proper lifting techniques. 2) Keep any machine guarding in place. Avoid moving parts. Use tools or equipment where necessary to avoid contacting pinch points. 3) Preview work locations for unstable/uneven terrain. 4) All equipment will be <ul style="list-style-type: none"> - Inspected in accordance with OSHA and manufacturer's design. - Operated by knowledgeable operators and ground crew. 5) Traffic and equipment considerations are to include the following: <ul style="list-style-type: none"> - Establish safe zones of approach (i.e. Boom + 5 feet). - Secure all loose articles. - All equipment shall be equipped with movement warning systems. - All activities are to be conducted consistent with the site requirements. 6) Wear appropriate clothing for weather conditions. Provide acceptable shelter and liquids for field crews. Additional information regarding cold stress is provided in Section 4 of the Health and Safety Guidance Manual. 7) Avoid nesting areas, use repellents. Report potential hazards to the SSO. Follow guidance presented in Section 4 of the Health and Safety Guidance Manual. 8) Suspend or terminate operations until directed otherwise by SSO. 	Not required	<p>Level D - (Minimum Requirements)</p> <ul style="list-style-type: none"> - Standard field attire (Sleeved shirt; long pants) - Steel toe safety shoes - Safety glasses - Hardhat (when overhead hazards exists, or identified as a operation requirement) - Reflective vest for high traffic areas - Hearing protection for high noise areas, or as directed on an operation by operation scenario. 	Not required
Decontamination of Sampling and Heavy Equipment.	<p>Chemical hazards:</p> <ol style="list-style-type: none"> 1) Potential contaminants of concern include: <ul style="list-style-type: none"> <u>Buildings 106 and 107</u> volatile organic compounds (specifically Trichloroethylene, 1,1,1-Trichloroethane, 1,1-Dichloroethene and 1,1-Dichloroethane <u>SWMU 8</u> - Primary site contaminants include VOCs (toluene, MEK, TCE, Napthha) and metals. Other potential contaminants including PCP, SVOCs, energetics, and caustics (particularly HCl) however, high concentrations are unlikely to be encountered in media (groundwater, soils, etc.) <u>SWMU 15</u> - Primary site contaminants include VOCs (primarily related to petroleum and asphalt products) and metals. Other potential contaminants including SVOCs however, high concentrations are unlikely to be encountered in media (groundwater, soils, etc.). <p>Site specific contaminants are discussed in greater detail in section 3.0 and Table 6-1 provides additional information about several of the primary contaminant of concern that are suspected at each SWMU.</p> <ol style="list-style-type: none"> 2) Decontamination fluids - Liquinox (detergent), acetone or isopropanol <p>Physical Hazards:</p> <ol style="list-style-type: none"> 3) Lifting (strain/muscle pulls) 4) Noise in excess of 85 dBA 5) Flying projectiles 6) Vehicular and foot traffic 7) Ambient temperature extremes (cold/heat stress) 8) Slips, trips, and falls <p>Natural hazards:</p> <ol style="list-style-type: none"> 9) Inclement weather 	<ol style="list-style-type: none"> 1) and 2) Use protective equipment to minimize contact with site contaminants and hazardous decontamination fluids. Obtain manufacturer's MSDS for any decontamination fluids used on-site. These must be used in well-ventilated areas, such as outdoors. Use appropriate PPE as identified on MSDS. All chemicals used must be listed on the Chemical Inventory for the site, and site activities must be consistent with the Hazard Communication section of the Health and Safety Guidance Manual (Section 5). 3) Use multiple persons where necessary for lifting and handling sampling equipment for decontamination purposes. 4) Wear hearing protection when operating pressure washer. 5) Use eye and face protective equipment when operating pressure washer. All other personnel must be restricted from the area. 6) Traffic and equipment considerations are to include the following: <ul style="list-style-type: none"> - Establish safe zones of approach. - All equipment shall be equipped with movement warning systems. - All activities are to be conducted consistent with the site requirements. 7) Wear appropriate clothing for weather conditions. Provide acceptable shelter and liquids for field crews. Additional information regarding cold/heat stress is provided in Section 4 of the Health and Safety Guidance Manual. 8) Preview work locations for unstable/uneven terrain. 9) Suspend or terminate operations until directed otherwise by SSO. 	Use visual observation and real-time monitoring instrumentation to ensure all equipment has been properly cleaned of contamination and dried. After decon is completed, screen equipment with a PID/FID. If any elevated readings (i.e., above background) are observed, perform decon again and re-screen. Repeat until no elevated PID/FID readings are noted.	<p>For Heavy Equipment This applies to high-pressure soap/water, steam cleaning wash and rinse procedures.</p> <p>Level D Minimum requirements -</p> <ul style="list-style-type: none"> - Standard field attire (Long sleeve shirt; long pants) - Steel toe safety shoes - Chemical resistant boot covers - Nitrile outer gloves - Safety glasses underneath a splash shield - Hearing protection (plugs or muffs) - PVC Rain suits or PE or PVC coated Tyvek <p>For Sampling Equipment (trowels, MacroCore Samplers, bailers, etc.), the following PPE is required:</p> <p>Note: Consult MSDS for PPE guidance. Otherwise, observe the following.</p> <p>Level D Minimum requirements -</p> <ul style="list-style-type: none"> - Standard field attire (Long sleeve shirt; long pants) - Steel toe safety shoes - Nitrile outer gloves - Safety glasses <p>In the event of over spray of chemical decontamination fluids employ PVC Rain suits or PE or PVC coated Tyvek as necessary.</p> <p>Note: The Safe Work Permit(s) for this task (see Attachment V) will be issued at the beginning of each day to address the tasks planned for that day. As part of this task, additional PPE may be assigned to reflect site-specific conditions or special considerations or conditions associated with any identified task.</p>	<p>Personnel Decontamination will consist of a soap/water wash and rinse for reusable outer protective equipment (boots, gloves, PVC splash suits, as applicable). The decon function will take place at an area adjacent to the site activities. This procedure will consist of:</p> <ul style="list-style-type: none"> - Equipment drop - Soap/water wash and rinse of outer boots and gloves, as applicable - Soap/water wash and rinse of the outer splash suit, as applicable - Disposable PPE will be removed and bagged. <p>Equipment Decontamination - All heavy equipment decontamination will take place at a centralized decontamination pad utilizing steam or pressure washers. Heavy equipment will have the wheels and tires cleaned along with any loose debris removed, prior to transporting to the central decontamination area. All site vehicles will have restricted access to exclusion zones, and have their wheels/tires sprayed off as not to track mud onto the roadways servicing this installation. Roadways shall be cleared of any debris resulting from the onsite activity.</p> <p>Sampling Equipment Decontamination</p> <p>Sampling equipment will be decontaminated as per the requirements in the Quality Assurance Project Plan.</p> <p>MSDS for any decon solutions (Alconox, isopropanol, etc.) will be obtained and used to determine proper handling / disposal methods and protective measures (PPE, first-aid, etc.).</p> <p>All equipment used in the exclusion zone will require a complete decontamination between locations and prior to removal from the site.</p> <p>The FOL or the SSO will be responsible for evaluating equipment arriving on-site and leaving the site. No equipment will be authorized access or exit without this evaluation.</p>

**TABLE 5-1
TASKS/HAZARDS/CONTROL MEASURES
NAVAL SURFACE WARFARE CENTER CRANE DIVISION, CRANE, INDIANA**

Tasks/Operation/ Locations	Anticipated Hazards	Recommended Control Measures	Hazard Monitoring	Personal Protective Equipment <i>(Items in italics are deemed optional as conditions or the FOL or SSO require.)</i>	Decontamination Procedures
<p>Multi-media sampling:</p> <p>Will consist of soil, surface water, sediment and groundwater sampling.</p> <p>Related tasks (well development, bladder pump installation, water-quality field measurements, groundwater-level measurements, slug tests, and the inspection and repair of existing monitoring wells) are included in this task entry given the similarities with regard to physical and chemical hazards.</p>	<p>Chemical hazards:</p> <p>1) Potential contaminants of concern include:</p> <p><u>Buildings 106 and 107</u> volatile organic compounds (specifically Trichloroethylene, 1,1,1-Trichloroethane, 1,1-Dichloroethene and 1,1-Dichloroethane</p> <p><u>SWMU 8</u> – Primary site contaminants include VOCs (toluene, MEK, TCE, Napthha) and metals. Other potential contaminants including PCP, SVOCs, energetics, and caustics (particularly HCl) however, high concentrations are unlikely to be encountered in media (groundwater, soils, etc.)</p> <p><u>SWMU 15</u> – Primary site contaminants include VOCs (primarily related to petroleum and asphalt products) and metals. Other potential contaminants including SVOCs however, high concentrations are unlikely to be encountered in media (groundwater, soils, etc.).</p> <p>Site specific contaminants are discussed in greater detail in section 3.0 and Table 6-1 provides additional information about several of the primary contaminant of concern that are suspected at each SWMU.</p> <p>2) Transfer of contamination into clean areas</p> <p>Physical hazards:</p> <p>3) Noise in excess of 85 dBA</p> <p>4) Lifting (strain/muscle pulls)</p> <p>5) Pinches and compressions</p> <p>6) Slips, trips, and falls</p> <p>7) Ambient temperature extremes (cold/heat stress)</p> <p>8) Vehicular and foot traffic</p> <p>9) Water/drowning hazard</p> <p>Natural hazards:</p> <p>10) Insect/animal bites and stings, poisonous plants, etc.</p> <p>11) Inclement weather</p>	<p>1) Use real-time monitoring instrumentation, action levels, and identified PPE to control exposures to potentially contaminated media such as air, water, and soils. Although not anticipated to be present, generation of dusts should be minimized. If airborne dusts are observed, area-wetting methods may be used. If area-wetting methods are not feasible, activities must be suspended until dust levels subside, or until an acceptable alternative control method can be selected.</p> <p>2) Decontaminate all equipment and supplies between sampling locations and prior to leaving the site.</p> <p>3) When sampling at the operating HSA or DPT rig use hearing protection. The use of hearing protection outside of 25 feet from the HSA/DPT rig should be incorporated under the following condition: <i>If you have to raise your voice to talk to someone who is within 2 feet of your location, hearing protection must be worn.</i></p> <p>4) Use machinery or multiple personnel for heavy lifts. Use proper lifting techniques.</p> <p>5) Avoid moving parts. Use tools or equipment where necessary to avoid contacting pinch points. - A remote sampling device must be used to sample drill cuttings near rotating tools. The equipment operator shall shutdown machinery if the sampler is near moving machinery parts.</p> <p>6) Preview work locations for unstable/uneven terrain.</p> <p>7) Wear appropriate clothing for weather conditions. Provide acceptable shelter and liquids for field crews. Additional information regarding cold/heat stress is provided in Section 4 of the Health and Safety Guidance Manual.</p> <p>8) Traffic and equipment considerations are to include the following: - Establish safe zones of approach (i.e. Boom + 5 feet). See Section 9 of the HASP for specific safety zones based on media being sampled. - All equipment shall be equipped with movement warning systems. - All activities are to be conducted consistent with the site requirements.</p> <p>9) When working within 4 feet of the water edge of the pond or other body of water, lifelines, safety harnesses, personal flotation devices, or other personal safety devices will be utilized.</p> <p>10) Avoid nesting areas, use repellents. Report potential hazards to the SSO. Follow guidance presented in Section 4 of the Health and Safety Guidance Manual.</p> <p>11) Suspend or terminate operations until directed otherwise by the SSO.</p>	<p>A direct reading Photoionization Detector (PID) with a 10.6 eV lamp or higher, or a Flameionization Detector (FID), will be used to screen samples and to detect the presence of any potential volatile organics. Source monitoring of the sample collection area will be conducted at each sampling location or as directed by the SSO. Positive sustained results at a source or downwind location(s) which may impact operations crew will require the following actions:</p> <p>- Monitor the breathing zone of at-risk and downwind employees. Any sustained readings (greater than 1 minute in duration) greater than 1 ppm above established background levels in the breathing zone of the at-risk employees requires site activities to be suspended and site personnel to retreat to an unaffected area.</p> <p>- Work may only resume if airborne readings in worker breathing zone return to background levels. If elevated readings in worker breathing zone persist, the PHSO and HSM will be contacted to determine necessary actions and levels of protection.</p> <p>Site contaminants may adhere to or be part of airborne dusts or particulates generated during site activities. Generation of dusts should be minimized to avoid inhalation of contaminated dusts or particulates. Evaluation of dust concentrations will be performed by observing work conditions for visible dust clouds. Potential exposure to contaminated dust will be controlled using water suppression, by avoiding dust plumes, or evacuating the operation area until dust subsides.</p>	<p>Level D protection will be utilized for the initiation of all sampling activities.</p> <p>Level D - (Minimum Requirements)</p> <ul style="list-style-type: none"> - Standard field attire (Sleeved shirt; long pants) - Steel toe safety shoes - Safety glasses - Surgical style gloves (<i>double-layered if necessary</i>) - <i>Reflective vest for high traffic areas</i> - <i>Hardhat (when overhead hazards exists, or identified as a operation requirement)</i> - <i>Tyvek coveralls and disposable boot covers if surface contamination is present or if the potential for soiling work attire exists.</i> - <i>Hearing protection for high noise areas, or as directed on an operation by operation scenario.</i> <p>Note: The Safe Work Permit(s) for this task (see Attachment V) will be issued at the beginning of each day to address the tasks planned for that day. As part of this task, additional PPE may be assigned to reflect site-specific conditions or special considerations or conditions associated with any identified task.</p>	<p>Personnel Decontamination will consist of a removal and disposal of non-reusable PPE (gloves, coveralls, etc., as applicable). The decon function will take place at an area adjacent to the site activities. This procedure will consist of:</p> <ul style="list-style-type: none"> - Equipment drop - Outer coveralls, boot covers, and/or outer glove removal (as applicable) - Removal, segregation, and disposal of non-reusable PPE in bags/containers provided - Soap/water wash and rinse of reusable PPE (e.g., hardhat) if potentially contaminated - Wash hands and face, leave contamination reduction zone.

TABLE 5-1
TASKS/HAZARDS/CONTROL MEASURES
NAVAL SURFACE WARFARE CENTER CRANE DIVISION, CRANE, INDIANA

Tasks/Operation/ Locations	Anticipated Hazards	Recommended Control Measures	Hazard Monitoring	Personal Protective Equipment <i>(Items in italics are deemed optional as conditions or the FOL or SSO require.)</i>	Decontamination Procedures
<p>Soil borings using Direct-Push Technology (Geoprobe®).</p> <p>Hazards related to drilling and installation of monitoring wells will be addressed in a HASP revision that will also include updated contaminant specific information.</p>	<p>Chemical hazards:</p> <p>1) Potential contaminants of concern include:</p> <p>Buildings 106 and 107 volatile organic compounds (specifically Trichloroethylene, 1,1,1-Trichloroethane, 1,1-Dichloroethene and 1,1-Dichloroethane</p> <p>SWMU 8 – Primary site contaminants include VOCs (toluene, MEK, TCE, Naptha) and metals. Other potential contaminants including PCP, SVOCs, energetics, and caustics (particularly HCl) however, high concentrations are unlikely to be encountered in media (groundwater, soils, etc.)</p> <p>SWMU 15 – Primary site contaminants include VOCs (primarily related to petroleum and asphalt products) and metals. Other potential contaminants including SVOCs however, high concentrations are unlikely to be encountered in media (groundwater, soils, etc.)</p> <p>Site specific contaminants are discussed in greater detail in section 3.0 and Table 6-1 provides additional information about several of the primary contaminant of concern that are suspected at each SWMU.</p> <p>2) Transfer of contamination into clean areas or onto persons</p> <p>Physical hazards:</p> <p>3) Heavy equipment hazards (pinch/compression points, rotating equipment, hydraulic lines, etc.)</p> <p>4) Noise in excess of 85 dBA</p> <p>5) Energized systems (contact with underground or overhead utilities)</p> <p>6) Lifting (strain/muscle pulls)</p> <p>7) Slips, trips, and falls</p> <p>8) Vehicular and foot traffic</p> <p>9) Ambient temperature extremes (cold/heat stress)</p> <p>10) Flying projectiles</p> <p>11) Drilling operations conducted at night.</p> <p>12) Water/drowning hazard</p> <p>Natural hazards:</p> <p>13) Insect/animal bites and stings, poisonous plants, etc.</p> <p>14) Inclement weather</p>	<p>1) Use real-time monitoring instrumentation, action levels, and identified PPE to control exposures to potentially contaminated media such as air, water, and soils. Generation of dusts should be minimized. If airborne dusts are observed, area-wetting methods may be used. If area-wetting methods are not feasible, activities must be suspended until dust levels subside, or until an acceptable alternative control method can be selected.</p> <p>2) Decontaminate all equipment and supplies between boreholes and prior to leaving the site:</p> <p>3) All equipment to be used will be</p> <ul style="list-style-type: none"> - Inspected in accordance with Federal safety and transportation guidelines, OSHA (1926.600, 601, 602), and manufacturers design and documented as such using Equipment Inspection Sheet (see Attachment IV of this HASP). - Operated by knowledgeable operators and ground crew. - Repaired using only manufacturer approved parts and equipment. <p>In addition to the equipment considerations, the following standard operating procedures will be employed:</p> <ul style="list-style-type: none"> - All personnel not directly supporting the drilling operation will remain at least the mast height plus 5 feet from the point of operation. - All loose clothing/protective equipment will be secured to avoid possible entanglement. - Hand signals will be established prior to the commencement of drilling activities. - A remote sampling device must be used to sample drill cuttings near rotating tools. - Work areas will be kept clear of clutter. - All personnel will be instructed in the location and operation of the emergency shut off device(s) for drill rigs. This device will be tested initially (and then periodically) to insure its operational status. One individual will be identified as being responsible for the operation of the emergency shut off device – this person will be communicated to the entire field crew and will be responsible for immediately activating the device in the event of an emergency. - The drill rig operator will visually inspect the area prior to engaging equipment to ensure personnel are in a safe area, away from hazardous areas of the rig. - Areas will be inspected prior to the movement of drill rigs and support vehicles to eliminate any physical hazards. This will be the responsibility of the FOL and/or SSO. <p>4) Hearing protection will be used during all subsurface activities using the DPT or drill rig.</p> <p>5) All drilling activities must proceed in accordance with the TINUS SOP "Utility Locating and Excavation Clearance" (see Attachment III of this HASP). All utility clearances must be obtained, in writing, prior to activities. Also, prior to any subsurface investigations, the locations of all underground utilities must be identified and marked. Overhead utilities must be identified per the SOP.</p> <p>6) Use machinery or multiple personnel for heavy lifts. Use proper lifting techniques.</p> <p>7) Preview work locations for unstable/uneven terrain.</p> <p>8) Traffic and equipment considerations are to include the following:</p> <ul style="list-style-type: none"> - Establish safe zones of approach (i.e. Boom + 5 feet). See Section 9 of the HASP for specific safety zones based on media being sampled. - All equipment shall be equipped with movement warning systems. - All activities are to be conducted consistent with the site requirements. <p>9) Wear appropriate clothing for weather conditions. Provide acceptable shelter and liquids for field crews. Additional information regarding cold/heat stress is provided in Section 4 of the Health and Safety Guidance Manual.</p> <p>10) Wear eye protection (safety glasses) when DPT rig is operating. All other personnel must be restricted from the area.</p> <p>11) Work performed at night will require the use of temporary light units to sufficiently illuminate the work area. Unit will provide light that satisfies the requirements of 29 CFR 1910.120 (m) as described in Section 5.3 of the HASP. Light unit will be placed on stable terrain providing an unobstructed path to the work area</p> <ul style="list-style-type: none"> - Secured to prevent collapse or unintended movement. - Placed outside the safe zone of approach to the drilling unit (i.e. Boom + 5 feet). - Refuel light unit using vented safety cans and only after the units engine has sufficiently cooled to prevent fuel ignition of spilled fuel. - A fire extinguisher will be stationed in close proximity to the lighting unit in case of accidental fire. <p>12) When working within 4 feet of the water edge of the pond or other body of water, lifelines, safety harnesses, personal floatation devices, or other personal safety devices will be utilized.</p> <p>13) Avoid nesting areas, use repellents. Wear appropriate clothing. Report potential hazards to the SSO. Follow guidance presented in Section 4 of the Health and Safety Guidance manual.</p> <p>14) Suspend or terminate operations until directed otherwise by SSO.</p>	<p>A direct reading Photoionization Detector (PID) with a 10.6 eV lamp or higher, or a Flameionization Detector (FID), will be used to screen the work area to detect the presence of any potential volatile organics. Source monitoring of the borehole will be conducted at regular intervals to be determined by the SSO. Positive sustained results at a source or downwind location(s) which may impact operations crew will require the following actions:</p> <ul style="list-style-type: none"> - Monitor the breathing zone of at-risk and downwind employees. Any sustained readings (greater than 1 minute in duration) greater than 1 ppm above established background levels in the breathing zone of the at-risk employees requires site activities to be suspended and site personnel to retreat to an unaffected area. - Work may only resume if airborne readings in worker breathing zone return to background levels. If elevated readings in worker breathing zone persist, the PHSO and HSM will be contacted to determine necessary actions and levels of protection. <p>Site contaminants may adhere to or is part of airborne dusts or particulates generated during site activities. Generation of dusts should be minimized to avoid inhalation of contaminated dusts or particulates. Evaluation of dust concentrations will be performed by observing work conditions for visible dust clouds. Potential exposure to contaminated dust will be controlled using water suppression, by avoiding dust plumes, or evacuating the operation area until dust subsides.</p>	<p>All subsurface operations are to be initiated in Level D protection. Level D protection constitutes the following minimum protection</p> <ul style="list-style-type: none"> - Standard field attire (Sleeved shirt; long pants) - Steel toe safety shoes - Safety glasses - Hardhat - Hearing protection during soil boring activities and for other high noise areas as directed by the SSO. - Nitrile gloves or leather gloves with surgical style inner gloves - <i>Reflective vest for traffic areas</i> - <i>Tyvek coveralls and disposable boot covers if surface contamination is present or if the potential exists for soiling work attire.</i> <p>Note: The Safe Work Permit(s) for this task (see Attachment V) will be issued at the beginning of each day to address the tasks planned for that day. As part of this task, additional PPE may be assigned to reflect site-specific conditions or special considerations or conditions associated with any identified task.</p>	<p>Personnel Decontamination - Will consist of a soap/water wash and rinse for reusable protective equipment (e.g., gloves). This function will take place at an area adjacent to the drilling operations bordering the support zone.</p> <p>This decontamination procedure for Level D protection will consist of</p> <ul style="list-style-type: none"> - Equipment drop - Soap/water wash and rinse of reusable outer gloves, as applicable - Outer coveralls, boot covers, and/or outer glove removal - Removal, segregation, and disposal of non-reusable PPE in bags/containers provided - Wash hands and face, leave contamination reduction zone.

**TABLE 5-1
TASKS/HAZARDS/CONTROL MEASURES
NAVAL SURFACE WARFARE CENTER CRANE DIVISION, CRANE, INDIANA**

Tasks/Operation/ Locations	Anticipated Hazards	Recommended Control Measures	Hazard Monitoring	Personal Protective Equipment <i>(Items in italics are deemed optional as conditions or the FOL or SSO require)</i>	Decontamination Procedures
<p>Surveying</p> <p>The location of every soil boring and surface water and sediment sample location will be marked and labeled for surveying by an Indiana-licensed surveyor.</p>	<p>Chemical hazards: Significant exposure to site contaminants is anticipated to be unlikely given the nature of this task.</p> <p>Physical hazards: 1) Slips, trips, and falls 2) Ambient temperature extremes (cold /heat) stress</p> <p>Natural hazards: 3) Inclement weather 4) Insect/animal bites or stings, poisonous plants, etc.</p>	<p>1) Preview work locations and site lines for uneven and unstable terrain. Clear necessary vegetation, establish temporary means for traversing hazardous terrain (i.e., rope ladders, etc.)</p> <p>2) Wear appropriate clothing for weather conditions. Provide acceptable shelter and liquids for field crews. Additional information regarding cold/heat stress is provided in Section 4 of the Health and Safety Guidance Manual.</p> <p>3) Suspend or terminate operations until directed otherwise by SSO</p> <p>4) Avoid nesting areas, use repellents. Report potential hazards to the SSO. Follow guidance presented in Section 4 of the Health and Safety Guidance Manual.</p>	<p>Air monitoring is not needed. The potential for exposure to site contaminants during this activity is considered minimal.</p>	<p>Surveying activities shall be performed in Level D protection</p> <p>Level D Protection consists of the following:</p> <ul style="list-style-type: none"> - Standard field dress including sleeved shirt and long pants - Steel toe safety shoes - <i>Safety glasses, hard hats (if working near machinery)</i> - <i>Snake chaps for heavily wooded area where encounters are likely.</i> - <i>Tyvek coveralls may be worn to provide additional protection against poisonous plants and insects particularly ticks. Work gloves may be worn if desired.</i> <p>Note: The Safe Work Permit(s) for this task (see Attachment V) will be issued at the beginning of each day to address the tasks planned for that day. As part of this task, additional PPE may be assigned to reflect site-specific conditions or special considerations or conditions associated with any identified task.</p>	<p>Personnel Decontamination - A structured decontamination is not required as the likelihood of encountering contaminated media is considered remote. However, survey parties should inspect themselves and one another for the presence of ticks when exiting wooded areas, grassy fields, etc. This action will be employed to stop the transfer of these insects into vehicles, homes, and offices.</p>
<p>IDW Management</p>	<p>Chemical hazards: The only anticipated hazard associated with IDW management is the potential for a spill.</p> <p>Physical hazards: 1) Lifting Hazards/Back Injuries 2) Compression Injuries 3) Loading bulk transport containers</p> <p>Natural hazards: 4) Inclement weather 5) Insect/animal bites or stings, poisonous plants, etc.</p>	<p>1 & 2) Strains and sprains (lifting hazards)/Back Injuries</p> <ul style="list-style-type: none"> - Use machinery (preferred method) or multiple personnel for heavy lifts. - Use proper lifting techniques including - Lift with your legs, not your back, bend your knees move as close to the load as possible, and ensure good hand holds are available. - Minimize the horizontal distance to the center of the lift to your center of gravity. - Minimize turning and twisting when lifting as the lower back is especially vulnerable at this time. - Break lifts into steps if the vertical distance (from the start point to the placement of the lift) is excessive. - Plan your lifts – Place heavy items on shelves between the waist and chest; lighter items on higher shelves. - Periods of high frequency lifts or extended duration lifts should provide sufficient breaks to guard against fatigue and injury. <p>3) Compression injuries – material-handling devices shall be used for moving drums. This includes drum dollies with pneumatic tires, drum grapplers, etc. These pieces of equipment are engineered to allow placement of these containers while removing hands from the point of operation.</p> <p>4) Suspend or terminate operations until directed otherwise by SSO</p> <p>5) Avoid nesting areas, use repellents. Report potential hazards to the SSO. Follow guidance presented in Section 4 of the Health and Safety Guidance Manual.</p>	<p>None Required, unless spill containment provisions are invoked. Then monitoring will proceed as described in the activity associated with the task when the materials were generated such as Soil boring or well installation.</p>	<p>Level D - (Minimum Requirements)</p> <ul style="list-style-type: none"> - Standard field attire (Sleeved shirt; long pants) - Steel toe safety shoes - Leather or canvas work gloves - <i>Safety glasses (When utilizing cables or slings to move the containers)</i> - <i>Hardhat (when overhead hazards exists, or identified as a operation requirement)</i> <p>PPE changes may be made with the implementation of the Spill Containment Program. This represents the only anticipated modification to this level of protection.</p>	<p>Not required, unless the implementation of the Spill Containment Program is required due to a spill and/or release. At that point the decontamination procedures for those activities such as soil borings and/or well installation. The reference reflects the tasks conducted when the materials were generated.</p>

TABLE 5-1
TASKS/HAZARDS/CONTROL MEASURES
NAVAL SURFACE WARFARE CENTER CRANE DIVISION, CRANE, INDIANA

Tasks/Operation/ Locations	Anticipated Hazards	Recommended Control Measures	Hazard Monitoring	Personal Protective Equipment <i>(Items in italics are deemed optional as conditions of the FOL or SSO require.)</i>	Decontamination Procedures
<p>Soil borings using Direct-Push Technology (Geoprobe®), and concrete coring within Buildings 106 and 107.</p>	<p>Chemical hazards:</p> <p>9) Potential contaminants of concern include:</p> <p><u>Buildings 106 and 107</u> volatile organic compounds (specifically Trichloroethylene, 1,1,1-Trichloroethane, 1,1-Dichloroethene and 1,1-Dichloroethane</p> <p>Site specific contaminants are discussed in greater detail in section 3.0 and Table 6-1 provides additional information about several of the primary contaminant of concern that were found at this site.</p> <p>Since soil borings will be collected from within a building using diesel or gasoline powered engines, site personnel may be exposed to exhaust gases including oxides of carbon, nitrogen, and other constituents of exhaust gases discussed in Section 5.4 and 6.1.2.</p> <p>2) Transfer of contamination into clean areas or onto persons</p> <p>Physical hazards</p> <p>3) Heavy equipment hazards (pinch/compression points, rotating equipment, hydraulic lines, etc.)</p> <p>4) Noise in excess of 85 dBA</p> <p>5) Energized systems (contact with underground or overhead utilities)</p> <p>6) Lifting (strain/muscle pulls)</p> <p>7) Slips, trips, and falls</p> <p>8) Vehicular and foot traffic</p> <p>9) Ambient temperature extremes (cold/heat stress)</p> <p>10) Flying projectiles</p> <p>11) Drilling operations conducted at night.</p> <p>Natural hazards</p> <p>12) Insect/animal bites and stings, poisonous plants, etc.</p> <p>13) Inclement weather</p>	<p>1) Use real-time monitoring instrumentation, action levels, and identified PPE to control exposures to potentially contaminated media such as air, water, and soils. Generation of dusts should be minimized. If airborne dusts are observed, area-wetting methods may be used. If area-wetting methods are not feasible, activities must be suspended until dust levels subside, or until an acceptable alternative control method can be selected. Use flexible hoses to divert exhaust gases to the outside and use available general ventilation to further dilute concentrations of exhaust gases. If necessary use local exhaust ventilation systems.</p> <p>2) Decontaminate all equipment and supplies between boreholes and prior to leaving the site.</p> <p>3) All equipment to be used will be</p> <ul style="list-style-type: none"> - Inspected in accordance with Federal safety and transportation guidelines, OSHA (1926.600, 601, 602), and manufacturers design and documented as such using Equipment Inspection Sheet (see Attachment IV of this HASP). - Operated by knowledgeable operators and ground crew. - Repaired using only manufacturer approved parts and equipment. <p>In addition to the equipment considerations, the following standard operating procedures will be employed:</p> <ul style="list-style-type: none"> - All personnel not directly supporting the drilling operation will remain at least the mast height plus 5 feet from the point of operation. - All loose clothing/protective equipment will be secured to avoid possible entanglement. - Hand signals will be established prior to the commencement of drilling activities. - A remote sampling device must be used to sample drill cuttings near rotating tools. - Work areas will be kept clear of clutter. - All personnel will be instructed in the location and operation of the emergency shut off device(s) for drill rigs. This device will be tested initially (and then periodically) to insure its operational status. One individual will be identified as being responsible for the operation of the emergency shut off device – this person will be communicated to the entire field crew and will be responsible for immediately activating the device in the event of an emergency. - The drill rig operator will visually inspect the area prior to engaging equipment to ensure personnel are in a safe area, away from hazardous areas of the rig. - Areas will be inspected prior to the movement of drill rigs and support vehicles to eliminate any physical hazards. This will be the responsibility of the FOL and/or SSO. <p>4) Hearing protection will be used during all subsurface activities using the DPT rig.</p> <p>5) All drilling activities must proceed in accordance with the TINUS SOP "Utility Locating and Excavation Clearance" (see Attachment III of this HASP). All utility clearances must be obtained, in writing, prior to activities. Also, prior to any subsurface investigations, the locations of all underground utilities must be identified and marked. Overhead utilities must be identified per the SOP.</p> <p>6) Use machinery or multiple personnel for heavy lifts. Use proper lifting techniques.</p> <p>7) Preview work locations for unstable/uneven terrain.</p> <p>8) Traffic and equipment considerations are to include the following:</p> <ul style="list-style-type: none"> - Establish safe zones of approach (i.e. Boom + 5 feet). See Section 9 of the HASP for specific safety zones based on media being sampled. - All equipment shall be equipped with movement warning systems. - All activities are to be conducted consistent with the site requirements. <p>9) Wear appropriate clothing for weather conditions. Provide acceptable shelter and liquids for field crews. Additional information regarding cold/heat stress is provided in Section 4 of the Health and Safety Guidance Manual.</p> <p>10) Wear eye protection (safety glasses) when DPT rig is operating. All other personnel must be restricted from the area.</p> <p>11) Work performed at night will require the use of temporary light units to sufficiently illuminate the work area. Unit will provide light that satisfies the requirements of 29 CFR 1910.120 (m) as described in Section 5.3 of the HASP. Light unit will be placed on stable terrain providing an unobstructed path to the work area</p> <ul style="list-style-type: none"> - Secured to prevent collapse or unintended movement. - Placed outside the safe zone of approach to the drilling unit (i.e. Boom + 5 feet). - Refuel light unit using vented safety cans and only after the units engine has sufficiently cooled to prevent fuel ignition of spilled fuel. - A fire extinguisher will be stationed in close proximity to the lighting unit in case of accidental fire. <p>12) Avoid nesting areas, use repellents. Wear appropriate clothing. Report potential hazards to the SSO. Follow guidance presented in Section 4 of the Health and Safety Guidance Manual.</p> <p>13) Suspend or terminate operations until directed otherwise by SSO.</p>	<p>A direct reading Photoionization Detector (PID) with a 10.6 eV lamp or higher, or a Flameionization Detector (FID), will be used to screen the work area to detect the presence of any potential volatile organics. Source monitoring of the borehole will be conducted at regular intervals to be determined by the SSO. Positive sustained results at a source or downwind location(s) which may impact operations crew will require the following actions:</p> <ul style="list-style-type: none"> - Monitor the breathing zone of at-risk and downwind employees. Any sustained readings (greater than 1 minute in duration) greater than 1 ppm above established background levels in the breathing zone of the at-risk employees requires site activities to be suspended and site personnel to retreat to an unaffected area. - Work may only resume if airborne readings in worker breathing zone return to background levels. If elevated readings in worker breathing zone persist, the PHSO and HSM will be contacted to determine necessary actions and levels of protection. <p>A four gas Air Monitoring Instrument will be used to detect LEL, O₂, CO and NO₂ will be used if exhaust gases cannot be adequately vented to the outside or to other unaffected areas. The following action levels will apply:</p> <p>For Carbon Monoxide:</p> <p>0-25 ppm of CO: Continue monitoring</p> <p>>25 ppm of CO: Discontinue site operations until readings return to background levels</p> <p>For Nitrogen Dioxide:</p> <p>0-5 ppm – Continue to work and observe workers for signs of exposure.</p> <p>> 5 ppm - Discontinue site operations until readings return to background levels</p> <p>Site contaminants may adhere to or is part of airborne dusts or particulates generated during site activities. Generation of dusts should be minimized to avoid inhalation of contaminated dusts or particulates. Evaluation of dust concentrations will be performed by observing work conditions for visible dust clouds. Potential exposure to contaminated dust will be controlled using water suppression, by avoiding dust plumes, or evacuating the operation area until dust subsides.</p>	<p>All subsurface operations are to be initiated in Level D protection. Level D protection constitutes the following minimum protection</p> <ul style="list-style-type: none"> - Standard field attire (Sleeved shirt; long pants) - Steel toe safety shoes - Safety glasses - Hardhat - Hearing protection during soil boring activities and for other high noise areas as directed by the SSO. - Nitrile gloves or leather gloves with surgical style inner gloves - Reflective vest for traffic areas - Tyvek coveralls and disposable boot covers if surface contamination is present or if the potential exists for soiling work attire. <p>Note: The Safe Work Permit(s) for this task (see Attachment V) will be issued at the beginning of each day to address the tasks planned for that day. As part of this task, additional PPE may be assigned to reflect site-specific conditions or special considerations or conditions associated with any identified task.</p>	<p>Personnel Decontamination - Will consist of a soap/water wash and rinse for reusable protective equipment (e.g., gloves). This function will take place at an area adjacent to the drilling operations bordering the support zone.</p> <p>This decontamination procedure for Level D protection will consist of</p> <ul style="list-style-type: none"> - Equipment drop - Soap/water wash and rinse of reusable outer gloves, as applicable - Outer coveralls, boot covers, and/or outer glove removal - Removal, segregation, and disposal of non-reusable PPE in bags/containers provided - Wash hands and face, leave contamination reduction zone.

6.0 HAZARD ASSESSMENT

The following section provides information regarding the chemical and physical hazards associated with the activities that are to be conducted as part of the scope of work. Table 6-1 provides information related to the chemical hazards that may be present at the site. Specifically, toxicological information, exposure limits, symptoms of exposure, physical properties, and air monitoring and sampling data are discussed in the table. It should be noted that the contaminants of concern might vary between tasks.

6.1 CHEMICAL HAZARDS

The potential health hazards associated with the scope of work include inhalation, ingestion, and dermal contact of site contaminants. Exposure is most likely to occur through ingestion and inhalation of contaminated soil or water, or hand-to-mouth contact. For this reason, PPE and basic hygiene practices (washing face and hands before leaving site) is extremely important.

6.1.1 Site Specific Chemical Hazards

SWMU 8 Building 106 Pond – Building operations included caustic washing, degreasing with TCE, acid wash with HCl, sand blasting, oil storage and the potential of oil-coated weapons storages, a paint shop that utilized paint thinners, toluene, naphtha, metals, xylenes, MEK, and a flocculant tank that could have contained aluminum, solutions of lead, nitric acid (HNO₃) and selenium. Explosive load and fill operations also reportedly have taken place. PCP was a chemical that was used in box processing. Waste oil with the potential of containing barium, chromium, and other metals might have been present, and raw sewage may have been released. Contaminant release mechanism would be leaks from drain lines to soil. Contaminant migration would be to deeper subsurface soils and possibly groundwater.

From an occupational exposure standpoint, VOCs (TCE, xylene, toluene, MEK, naphtha, etc.) present the greatest threat to site workers. Air monitoring with direct reading monitoring instruments will be used to detect the presence of VOCs in media and air. Solutions of caustic or acid materials are unlikely to be encountered in significant concentrations however, media will be treated as if it may have corrosive/hazardous properties. Potential exposures to other suspected contaminants of concern (metals, SVOCs, energetics, sewage, etc.) will be prevented through the use of safe work practices and PPE.

SWMU 15 Roads and Grounds Area - Potential site contaminants are associated with asphalt manufacturing and may include heavy petroleum type materials (SVOCs, VOCs) and leaded gasoline that were contained in USTs. Asphalt spills are known to have occurred, and related chemical releases to

surface soils may have occurred. Waste oils and organic solvents may have been stored in an AST. Herbicides and pesticides may also be present at the site. Contaminant migration would be to deeper soils and possibly groundwater.

For further information on the potential contaminants of concern, see Table 6-1.

6.1.2 Exhaust Gases/Fumes Created During Soil Boring Activities Within Buildings 106/107

Short-term (acute) effects of workers exposed to high concentrations of exhaust gasses/fumes may include irritation of the eyes, nose, and throat; lightheadedness; heartburn; headache; weakness, numbness and tingling in the extremities; chest tightness; wheezing; and vomiting. Some studies have suggested that workers exposed to diesel/gasoline exhaust are more likely to have chronic respiratory symptoms such as persistent cough and mucous, bronchitis, and reduced lung capacity than unexposed workers. Of particular concern is the potential for exposure to carbon monoxide which is present in diesel and more predominately, in gasoline engine exhaust. Upon entering the bloodstream, carbon monoxide combines with hemoglobin over 200 times more tightly than oxygen. Hemoglobin, then, is unable to carry oxygen in the blood. Carbon monoxide may also combine with myoglobin which may cause muscle metabolism disturbances, especially in the heart. The degree of toxicity depends primarily on carbon monoxide concentrations, exposure time, individual susceptibility, and exertion level.

To prevent or minimize potential exposures to carbon monoxide and other exhaust gas constituents, safe work practices identified in Section 5.4 and air monitoring measures listed in Table 5-1 and Section 7.1.2 will be used.

TABLE 6-1
CHEMICAL, PHYSICAL, AND TOXICOLOGICAL DATA
NWSC, CRANE DIVISION – SWMUs 8 and 15
CRANE, INDIANA

Substance	CAS No.	Air Monitoring/Sampling Information	Exposure Limits	Warning Property Rating	Physical Properties	Health Hazard Information	
VOLATILE ORGANIC COMPOUNDS (VOCs)							
1,1,1-Trichloroethane	71-55-6	PID: I.P. 11.0 eV, Relative response ration unkown FID: 105% relative respoinse ration with FID.	Air sample using charcoal tube; carbon disulfide desorption. Sampling and analytical protocol shall proceed in accordancè with NIOSH Method #1003	OSHA; ACGIH: 350 ppm NIOSH: 350 ppm ceiling limit.	Odor Threshold 22.4 ppm. APRs may be used however they have a very short service life. Recommended glove: Butyl; Polyvinyl alcohol; Viton	Boiling Pt: 165°F; 74°C Melting Pt: Unkown Solubility: 0.4% Flash Pt: Unknown LEL/LFL: 7.5% UEL/UFL: 12.5% Vapor Density: Unknown Vapor Pressure: 100 mmHg Specific Gravity: 1.34 Incompatibilities: Strong oxidizers, strong caustics, chemically active metals (zinc, aluminum, magnesium powders, sodium and potassium). Appearance and odor: Colorless liquid with a mild, chloroform-like odor.	Overexposure may result in CNS depression, headache, loss of balance, irritation to the skin and eyes, dermatitis, cardiac arrhythmia, and liver damage.
Trichloroethylene	79-01-6	PID: I.P. 9.45 eV, High response with PID and 10.2 eV lamp. FID: 70% Response with FID.	Air sample using charcoal tube; carbon disulfide desorption; Sampling and analytical protocol shall proceed in accordance with OSHA Method #07, or NIOSH Method #1022 or #1003.	OSHA: 50 ppm 200 ppm (Ceiling) ACGIH: 50 ppm 100 ppm STEL NIOSH: 25 ppm IDLH: 1000 ppm	Inadequate - Odor threshold 82 ppm. APRs with organic vapor/acid gas cartridges may be used for escape purposes. Exceedances over the exposure limits require the use of positive pressure-demand supplied air respirator. Recommended gloves: PV Alcohol unsupported >16.00 hrs; Silver shield >6.00 hrs; Teflon >24.00 hrs; or Viton >24.00 hrs; Nitrile (Useable time limit 0.5 hr, complete submersion for the nitrile selection)	Boiling Pt: 188°F; 86.7°C Melting Pt: -99°F; -73°C Solubility: 0.1% @ 77°F; 25°C Flash Pt: 90°F; 32°C LEL/LFL: 8% @ 77°F; 25°C UEL/UFL: 10.5 @ 77°F; 25°C Vapor Density: 4.53 Vapor Pressure: 100 mmHg @ 90°F; 32 °C Specific Gravity: 1.46 Incompatibilities: Strong caustics and alkalis, chemically active metals (barium, lithium, sodium, magnesium, titanium, and beryllium) Appearance and Odor: Colorless liquid with a chloroform type odor. Combustible liquid, however, burns with difficulty.	Central nervous system effects including euphoria, analgesia, anesthesia, paresthesia, headaches, tremors, vertigo, and somnolence. Damage to the liver, kidneys, heart, lungs, and skin have also been reported. Contact may result in irritation to the eyes, skin, and mucous membranes. Ingestion may result in GI disturbances including nausea, and vomiting NIOSH lists this substance a potential human carcinogen.

**TABLE 6-1
CHEMICAL, PHYSICAL, AND TOXICOLOGICAL DATA
NWSC, CRANE DIVISION – SWMUs 8 and 15
CRANE, INDIANA**

Substance	CAS No.	Air Monitoring/Sampling Information	Exposure Limits	Warning/Property/Rating	Physical Properties	Health Hazard Information
1,1 Dichloroethene See also vinylidene chloride	75-34-4	PID: I.P. 10.00 eV, relative response ratio is 80%. FID: Relative response ratio for detection with the FID is 40%.	Air sample using a charcoal filter tube; carbon disulfide desorption; GC/FID detection in accordance with NIOSH Method #1015. ACGIH: 5 ppm, STEL 20 ppm NIOSH & OSHA have not established exposure limits.	Odor threshold - 190 ppm. An air purifying respirator equipped with a organic vapors filter is acceptable for escape purposes only. For exposures greater than the recommended exposures limits should employ supplied air respirators. Recommended glove: Butyl, nitrile, or neoprene.	Boiling Pt: 89°F; 32°C Melting Pt: -188°F; -122°C Solubility: Slight (0.04%) Flash Pt: -2°F; -19°C LEL/LFL: 6.5% UEL/UFL: 15.5% Vapor Density: 3.25 Vapor Pressure: 500 mmHg @ 68°F; 20° C Specific Gravity: 1.21 @ 20°F; 4°C Incompatibilities: Aluminum, air, copper, and heat. Polymerization may occur if exposed to oxidizers. Appearance and Odor: Colorless liquid with a slight sweet chloroform odor.	Overexposure to this substance may result in irritation to the eyes, nose, throat, and respiratory system. Dermal contact with concentrated solutions may cause slight irritation, redness and inflammation. Systemically, headaches, dizziness, nausea, and difficulty in breathing. Chronic effects may include kidney and liver dysfunction, and pneumonitis. This material has expressed cancer causing potential in laboratory animals including liver and kidney tumors.
1,2-Dichloroethane see also Ethylene Dichloride	107-06-2	PID: I.P. 11.05 eV, 140% relative response ratio. FID: 80% response with FID.	Air sample using charcoal sorbent tube and carbon disulfide desorption with gas chromatography-flame ionization detector; Sample and analytical protocol in accordance with NIOSH Method #1003 OSHA: 50 ppm Ceiling 100 ppm ACGIH: 10 ppm NIOSH: 1 ppm IDLH: 50 ppm	Inadequate - This compound has poor warning properties (odor threshold 26 ppm) OSHA allows the use of organic vapor cartridges in certain circumstances. Recommended glove: Polyvinyl alcohol >8.00 hrs; Viton 6.90 hrs; Teflon >24.00 hrs; Silver Shield >6.00 hrs	Boiling Pt: 182°F; 83°C Melting Pt: -31°F; -35°C Solubility: 0.9% Flash Pt: 56°F; 13°C LEL/LFL: 6.2% UEL/UFL: 16% Vapor Density: Not available Vapor Pressure: 64 mmHg @ 68°F; 20° C Specific Gravity: 1.24 Incompatibilities: Strong oxidizers and caustics, chemically active metals such as aluminum or magnesium powder, sodium and potassium. Appearance and Odor: Colorless liquid with a pleasant, chloroform-like odor.	Exposure to this substance may cause CNS depression, nausea, vomiting, dermatitis, and irritation of the eyes. Chronic overexposure may result in damage to the kidneys, liver, eyes (cornea opacity), skin and CNS.

**TABLE 6-1
CHEMICAL, PHYSICAL, AND TOXICOLOGICAL DATA
NWSC, CRANE DIVISION – SWMUs 8 and 15
CRANE, INDIANA**

Substance	CAS/No.	Air Monitoring/Sampling Information	Exposure Limits	Warning/Property Rating	Physical Properties	Health/Hazard Information	
1,1-Dichloroethane	75-34-3	PID: I.P. 11.06 eV, relative response ratio unknown. FID: 80% relative response ratio with FID.	Air sample using charcoal tube; carbon disulfide desorption. Sampling and analytical protocol shall proceed in accordance with OSHA Method #07-B or NIOSH Method #1003	OSHA; NIOSH; ACGIH: 100 ppm IDLH: 4000 ppm	Questionable warning properties - Odor threshold 49 - 1359 ppm. APRs may be employed for escape only. Exceedances over the exposure limits are recommended to use airline or airline/APR combination type respirator. Recommended glove: Butyl; Polyvinyl alcohol; Viton	Boiling Pt: 135°F; 57°C Melting Pt: -143°F; -97°C Solubility: 0.6% Flash Pt: 2°F; -17°C LEL/LFL: 5.6% UEL/UFL: 11.4% Vapor Density: 3.42 Vapor Pressure: 182 mmHg Specific Gravity: 1.18 Incompatibilities: Strong oxidizers, strong caustics Appearance and odor: Colorless, oily liquid with a chloroform-like odor.	Overexposure may result in CNS depression, skin and eye irritation, and damage to the liver, kidneys, and lungs.
Toluene	108-88-3	PID: I.P. 8.82 eV, High response with PID and 10.2 eV lamp. FID: 110% response with FID.	Air sample using charcoal tube; carbon disulfide desorption. Sampling and analytical protocol shall proceed in accordance with OSHA Method #07, or NIOSH Method #1500.	OSHA: 200 ppm 300 ppm (Ceiling) ACGIH: 50 ppm (skin) NIOSH: 100 ppm 150 ppm STEL IDLH: 500 ppm	Adequate - Odor threshold 1.6 ppm is considered good. Can use air-purifying respirator with organic vapor cartridge up to 1,000 ppm. Recommended gloves: Teflon >15.00 hrs; Viton >16.00 hrs; silver shield >6.00 hrs; supported nitrile (Useable time limit 0.5 hr, complete submersion for the nitrile selection); PV alcohol >25.00 hrs	Boiling Pt: 232°F; 111°C Melting Pt: -139°F; -95°C Solubility: 0.05% (61°F; 16°C) Flash Pt: 40°F; 4°C LEL/LFL: 1.2% UEL/UFL: 7.1% Vapor Density: 3.14 Vapor Pressure: 20 mmHg @ 65°F; 18°C Specific Gravity: 0.87 Incompatibilities: Strong oxidizers Appearance and odor: Colorless liquid with a sweet pungent aromatic odor.	Overexposure to this substance may result in mild to moderate irritation at all points of contact, and CNS changes including euphoria, confusion, nervousness, and possibly paresthesia characterized by an abnormal burning sensation, pricking, or numbness. At 200-500 ppm exposure has resulted in headaches, nausea, eye irritation, loss of appetite, bad taste, impair coordination; fatigue, and weariness. Chronically, toluene overexposure may result in dermatitis, liver, and kidney damage.
Methyl ethyl ketone (2-Butanone)	78-93-3	PID: I.P. 9.54 eV high response with PID and 10.2 eV lamp. FID: 80% relative response ratio with FID.	Air sample using Ambersorb tube; carbon disulfide desorption; GC/FID detection. Sampling and analytical protocol shall proceed in accordance with OSHA Method #16, 84 or NIOSH Method #2500.	OSHA; NIOSH; ACGIH: 200 ppm NIOSH; ACGIH: have established STEL of 300 ppm IDLH: 3000 PPM	Adequate - Can use air purifying respirator with organic vapor cartridges up to 2000 ppm. Recommended gloves: Poly vinyl alcohol or natural rubber	Boiling Pt: 175°F; 79°C Melting Pt: -124°F; -86.4°C Solubility: 28% Flash Pt: 16°F; 9°C LEL/LFL: 1.4% UEL/UFL: 11.4% Vapor Density: 2.41 Vapor Pressure: 71 mmHg Specific Gravity: 0.81 Incompatibilities: Strong oxidizers, amines, ammonia, inorganic acids, caustics, copper, isocyanates, pyridines Appearance and odor: Colorless liquid with a moderately sharp, fragrant mint- or acetone like odor	Exposure may result in irritation to the eyes and nose. Overexposure may cause headache, dizziness, and vomiting. Target organs are the Central Nervous System and lungs.

**TABLE 6-1
CHEMICAL, PHYSICAL, AND TOXICOLOGICAL DATA
NWSC, CRANE DIVISION – SWMUs 8 and 15
CRANE, INDIANA**

Substance	CAS/No.	Air Monitoring/Sampling Information	Exposure Limits	Warning/Property/Rating	Physical Properties	Health/Hazard Information	
Naphtha (Coal Tar)	8030-30-6	PID (10.6 eV Lamp Strength Correction factor = 0.6 FID = LEL Meter = 0.85	Air sample using charcoal tube. Sampling and analytical protocol shall proceed in accordance with NIOSH Method #1501. See also OSHA CSI Method application	OSHA; NIOSH: 100 ppm ACGIH: N.E.	Petroleum odor threshold ~ 800 ppm Rating - Poor to Adequate Recommended Air Purifying cartridges: Organic vapor Recommended gloves: NitrilSolve 727 (>480 minutes) or Neoprene 6780 (287 minutes)	Characteristics vary by fuel blending, grade, and manufacturer (e.g., impurities and additives) Boiling Pt: 158°F, -70°C Melting Pt: -72° F; -58°C Molecular Weight: -86-170 Flash Pt: -50°F, -45°C LEL: 1.4% UEL: 7.6% Autoignition Temp.: 824°F; 439°C Vapor Density: -4 Vapor Pressure: 5.5 to 7.0 psi SG: 0.71 @ 60° F; 15.6°C PH: -7.0 Solubility in water: Negligible (<0.1%) @ 77°F; 25°C Viscosity: 0.6 cST @ 77°F; 25°C Appearance and Odor: Coal tar naphtha is a colorless or reddish to brown colored, mobile liquid with an aromatic odor. It is a mixture of comprised of varying percentages of aromatic hydrocarbons including toluene, xylene, benzene, and cumene. The benzene content is higher in the coal tar naphthas with low boiling points.	Naphtha is irritating to the eyes, skin, respiratory tract, and CNS (This through direct contact or reaching concentrations >1000 ppm). Direct contact may result in mild irritation with a possible drying and defatting of the skin. Ingestion may result in gastrointestinal irritation, nausea, and vomiting and may be harmful or even fatal. Inhalation of vapors or mists of naphtha may result in headache, nausea, confusion, narcotic effect, and drowsiness. Acute exposures to extreme airborne concentration can result in death. Chronic inhalation of aviation gas vapors may produce symptoms such as fatigue, anxiety, mood changes, liver and kidney damage, and memory difficulties in exposed workers. Repeated exposures to the skin may cause skin cancer. Constituents of naphtha may have carcinogenic capabilities.
PCBs							
Aroclor-1260 (Polychlorinated Biphenyl, PCB) It should be noted that this substance is representative of the more common isomers Aroclor - 1242, 1254, which may be encountered.	11096-82-5 53469-21-9 (42%) 11097-69-1 (54%)	Substance is not volatile (VP=0.00006 mmHg), I.P. is unknown however is anticipated to be elevated, therefore, PID is not anticipated to detect substance. Substance is non combustible and as a result will not be detected by FID.	Air sample using a particulate filter, Florisil sorbent tube with glass fiber filter; hexane desorption; gas chromatography-electron capture detector. Sampling and analytical protocol shall proceed in accordance with NIOSH Method #5503 (PCBs).	OSHA; ACGIH: 0.5 mg/m ³ (skin) NIOSH: 0.001 mg/m ³ IDLH: 5 mg/m ³	Inadequate - However due to the low volatility it is assumed unless agitated this substance does not present a volatile vapor or gas respiratory threat. For dusty conditions where this material may cling to particulates, use a HEPA filter. APRs are approved for escape only when concentrations exceed the exposure limits. Concentrations greater than the exposure limits require PAPR or supplied air respirators. Recommended gloves: Butyl rubber >24 hrs; Neoprene rubber >24.00 hrs; Silver shield or Viton (for pure product).	Boiling Pt: distillation range 689- 734°F; 365-390°C Melting Pt: -2 to 50°F; -19 to 10°C Solubility: Insoluble Flash Pt: Not applicable LEL/LFL: Not applicable UEL/UFL: Not applicable Nonflammable liquid, however, exposure to fire results in black soot containing PCBs, dibenzofurans, & chlorinated dibenzo-p-dioxins Vapor Density: Not available Vapor Pressure: 0.00006 - 0.001 mmHg Specific Gravity: 1.566 @ 60°F; 15.5°C Incompatibilities: Strong oxidizers Appearance and Odor: Colorless to pale yellow, viscous liquid or solid (Aroclor 54 below 50°F) with a mild, hydrocarbon odor	This substance is irritating to the eyes and skin. Chronic effects of overexposure may include potential to cause liver damage, chloracne, and reproductive effects. Recognized as possessing carcinogenic properties by NIOSH, and NTP.

**TABLE 6-1
CHEMICAL, PHYSICAL, AND TOXICOLOGICAL DATA
NWSC, CRANE DIVISION – SWMUs 8 and 15
CRANE, INDIANA**

Substance	CAS No.	Air Monitoring/Sampling Information	Exposure Limits	Warning Property Rating	Physical Properties	Health Hazard Information	
General PAHs / Coal Tar Pitch Volatiles / Creosote / cresol (Fluoranthene, pyrene, benzo(a) anthracene, benzo(a) pyrene, benzo(f)fluoranthene, benzo(k)fluoranthene), etc.)	(CAS Numbers vary depending on specific compound)	PID: I.P. of 8.97 eV, relative response ratio unknown. FID: Response factor unknown but given the substances flammability, detection by FID can be anticipated.	Refer to NIOSH methods for each specific compound for appropriate air sampling protocols. Many PAHs can be sampled using NIOSH Method 5506 or 5515 - Teflon filter with support ring - High pressure liquid chromatography with UV detector. For cresol (a major constituent of creosote) by silica gel or xad-7 sorbent tube; Acetone desorption and analysis by gas chromatography - flame ionization detector or high-pressure liquid chromatography. (NIOSH Method #2001, or OSHA Method #32)	General PAHs: Most PAHs have no established exposure limits. Other Coal Tar Pitch Volatiles / PAHs such as chrysene and benzo(a)pyrene have an exposure limit of 0.2 mg/m3 (OSHA and ACGIH). NIOSH; 0.1 mg/m3 Creosote / Cresol: OSHA; ACGIH: 5 ppm skin NIOSH: 2.3 ppm IDLH: 250 ppm	Adequate - use a full-face air-purifying respirator with organic vapor / dust/mist cartridge up to 250 ppm. Cresol has an Odor Threshold of 0.00005-0.0079 ppm. Recommended gloves: Viton >96.00 hrs; butyl rubber >90.00 hrs; neoprene >4.50 hrs	Properties of various PAHs/Coal Tar Pitch Volatiles vary depending upon the specific compound. For Creosote/Cresol: Boiling Pt: 376-397°F; 191-203°C Melting Pt: 52-96°F; 10.9-35.5°C Solubility: Insoluble Flash Pt: 178°F; 81°C LEL/LFL: Not available UEL/UFL: Not available Vapor Density: 3.72 Vapor Pressure: 1 mmHg @ 100-127°F; 38-53°C Specific Gravity: 1.030-1.038 Incompatibilities: Nitric acid, oleum, chlorosulfonic acid, oxidizers Appearance and Odor: Yellowish or colorless, flammable, oily liquid (often brownish because of impurities or oxidation)	Regulated based on effects on respiratory tract and skin irritation. Other effects may include eye irritation and central nervous system, disturbances. Acute exposures may result in difficulty breathing, respiratory failure and skin and eye irritation and burns. Chronic exposure may damage the liver, kidneys, lungs and skin and cause photosensitivity. IARC, NTP, NIOSH, ACGIH, and the EPA list some PAHs such as benzo(a)pyrene as a potential carcinogen (ARC 2A, NTP-2, ACGIH TLV-A2, NIOSH-X, EPA-B2).
Chromium Compounds	7440-47-3 (Element)	Not detectable by PID. Not detectable by FID.	Air sample using mixed cellulose - ester filter, acid desorption and analysis by atomic absorption. Sampling and analytical protocol shall proceed in accordance with NIOSH Method #7024.	OSHA & NIOSH: (Chromium II, III) 0.5 mg/m3 (Chromium VI) 0.1 mg/m3 (Ceiling) ACGIH: 0.5 mg/m3 (Chromium II, III compounds), 0.05 mg/m3 (Chromium VI compounds) IDLH: 30 mg/m3 (Chromium VI compounds)	The use of an air purifying, full face-piece respirator with a high efficiency particulate filter for concentrations up to 0.1 mg/m3. Recommended Gloves: This is in particulate form. Therefore any glove suitable to prevent skin contact.	Boiling Pt: 4788°F; 2642°C Melting Pt: 3452°F; 1900°C Solubility: Insoluble Flash Pt: Not applicable (Airborne dust may burn or explode when exposed to heat, flame, or incompatible chemicals) LEL/LFL: Not applicable UEL/UFL: Not applicable Vapor Density: Not available Vapor Pressure: 0 mmHg Specific Gravity: 7.14 Incompatibilities: Strong oxidizers, peroxides, and alkalis Appearance and Odor: Appearance and odor vary depending upon the specific compound.	Health hazards are characterized normally through chronic exposure manifesting as histologic fibrosis of the lungs and ulceration of the nasal septum and skin. IARC, NTP and ACGIH list various chromium compounds as possessing carcinogenic properties.

**TABLE 6-1
CHEMICAL, PHYSICAL, AND TOXICOLOGICAL DATA
NWSC, CRANE DIVISION – SWMUs 8 and 15
CRANE, INDIANA**

Substance	CAS No.	Air Monitoring/Sampling Information		Exposure Limits	Warning Property/Rating	Physical Properties	Health Hazard Information
Lead	7439-92-1	Particulate form - Unable to be detected by either PID or FID.	Air sample using a mixed cellulose ester filter; or HNO ₃ or H ₂ O ₂ desorption; or Atomic absorption detection. Sampling and analytical protocol shall proceed in accordance with NIOSH Method #7082 or #7300.	OSHA: 0.05 mg/m ³ ACGIH: 0.15 mg/m ³ NIOSH: 0.10 mg/m ³ IDLH: 100 mg/m ³ as lead	The use of an air purifying, full-face respirator with high efficiency particulate air filter for up to 2.5 mg/m ³ . Recommended gloves: This is in the particulate form. Therefore any glove suitable to prevent skin contact (Nitrile has been the one most widely used for the other substances).	Boiling Pt: 3164°F; 1740°C Melting Pt: 621°F; 327°C Solubility: Insoluble Flash Pt: Not applicable (Airborne dust may burn or explode when exposed to heat, flame, or incompatible chemicals) LEL/LFL: Not applicable UEL/UFL: Not applicable Vapor Density: Not available Vapor Pressure: 0 mmHg Specific Gravity: 11.34 Incompatibilities: Strong oxidizers, peroxides, sodium acetylde, zirconium, and acids Appearance and Odor: Metal: A heavy ductile, soft gray solid.	Overexposure to this substance via ingestion or inhalation may result in metallic taste in the mouth, dry throat, thirst, gastrointestinal disorders (burning stomach pain, nausea, vomiting, possible diarrhea sometimes bloody or black, accompanied by severe bouts of colic), CNS effects (muscular weakness, pain, cramps, headaches, insomnia, depression, partial paralysis possibly coma and death. Extended exposure may result in damage to the kidneys, gingival lead line, brain, and anemia.
METALS (Cont.)							
Zinc	7440-66-6	Particulate form - This substance is not detectable using a PID or FID.	Air sample using a particulate filter; acid desorption; AAS detection. Sampling and analytical protocol will proceed in accordance with NIOSH Method #7300.	OSHA: 10 mg/m ³ Total dust, 5 mg/m ³ Respirable fraction NIOSH: 5 mg/m ³ , 15 mg/m ³ (Ceiling) ACGIH: 10 mg/m ³	No identifiable warning properties to indicate presence and thereby detection. Recommended APR Cartridge: Suitable for dust and fume. Organic vapor acid gases with HEPA filter. Recommended gloves: This is in the particulate form. Therefore any glove suitable to prevent skin contact (Nitrile has been the one most widely used for the other substances).	Boiling Pt: 1666°F; 908°C Melting Pt: 788°F; 419.8°C Solubility: Insoluble Flash Pt: Not available (Airborne dust may burn or explode when exposed to heat, flame, or incompatible chemicals) LEL/LFL: Not available UEL/UFL: Not available Vapor Density: Not available Vapor Pressure: 0 mmHg Specific Gravity: 7.14 Incompatibilities: Strong acids, halogens, catalytic metals, combustibles, oxidizers, nitril fluoride Appearance and odor: Bluish-white, lustrous metal, odorless	Inhalation of fumes may result in metal fume fever. This condition is characterized by metallic taste, dryness of the throat, coughing with generalized aching and flu-like symptoms. Effects through ingestion may include coughing, difficulty in breathing, and sweating. A human skin irritant. Irritation to the eyes may result from mechanical action.
Cyanides (as CN)	varies depending of compound	No information found.	Air sample using filter; analyze using specific ion electrode. Sampling and analytical protocol in accordance with established methodology.	OSHA; ACGIH; NIOSH: 5 mg/m ³ (ceiling) IDLH: 50 mg/m ³	Inadequate warning properties; recommend the use of supplied air respirators. Recommended Gloves: Butyl 1.00 hr.	Boiling Pt: 2725°F; 1496°C Melting Pt: 1047°F; 564°C Solubility: 58% Flash Pt: Not available LEL/LFL: Not available UEL/UFL: Not available Vapor Density: Not available Vapor Pressure: 0 mmHg Specific Gravity: 1.6 Incompatibilities: Strong oxidizers, acids, acid salts, chlorates, and nitrates Appearance and odor: KCN and NaCN are white granular or crystalline solids with a faint almond-like odor	Overexposure may result in chemical asphyxiation and death. Symptoms of exposure include weakness, headache, confusion, nausea, vomiting, increased respiratory rate, slow gasping respirations, irritation of the eyes and skin. Target organs are listed as Cardiovascular system, Central nervous system, liver, kidneys, and skin.

6.2 PHYSICAL HAZARDS

The following is a list of physical hazards that may be encountered at the site or may be present during the performance of site activities associated with the scope of work. Some of these hazards are discussed below while the rest are discussed in the TtNUS Health and Safety Guidance Manual.

- Slips, trips, and falls
- Cuts (or other injuries associated with hand tool use)
- Energized systems (contact with underground or overhead utilities)
- Lifting (strain/muscle pulls)
- Ambient temperature extremes (cold and heat stress)
- Pinches and compressions
- Heavy equipment hazards (rotating equipment, hydraulic lines, etc.)
- Vehicular and foot traffic
- Noise in excess of 85 dBA
- Heat Stress
- Water Hazards (April 2006)

NOTE: Although site operations at potential investigation areas may have involved the handling of ordnance material or energetics, no unexploded ordnance (UXO) hazards are anticipated to exist at either SWMU 8 and 15. UXO screening is not anticipated to be conducted at SWMU 8 and 15. If potential ordnance is encountered during investigative activities, the activities will stop and the Crane Environmental Site Manager will be notified.

6.2.1 Slips, Trips, and Falls

Conditions such as steep terrain and/or heavy vegetation may create an increased potential for slip, trip, and fall hazards. To avoid these hazards:

- The safest approach to sample points will be identified and cleared to permit field crew access to sample locations.
- Establish anchor points and rope handrails for traversing/ascending/descending angles and slopes greater than 45% grade.
- Use footwear with an adequate traction.

- When working within 4 feet of the water edge of a pond or other body of water, lifelines, safety harnesses, personal floatation devices, or other personal safety devices will be utilized.
- Prepare work areas by removing tripping hazards (ruts, roots, debris). This is especially critical around rotating equipment, where a fall into the rotating apparatus could be life threatening.

6.2.2 Cuts or Other Injuries Associated with Hand Tool Use

The control measures presented below will help minimize the potential for physical and cutting hazards.

- Wear leather or heavy cotton work gloves when using tools to protect against blisters, cuts, or other hand injuries.
- Wear eye protection (safety glasses with side shields) to protect the eyes from flying debris.
- Wear long pants and long-sleeved shirts to protect against abrasions.
- Inspect all hand tools before each use.
- Ensure all knives are sharp to facilitate cutting action. This will avoid persons forcing to cut and increasing potential hazards.
- Use the proper tool for the intended purpose. The proper tool for cutting the acetate tube for sampling is the retention tub recommended by Geoprobe. This will avoid potential injury possibly created through improper cutting procedures.

6.2.3 Energized Systems (Contact with Underground or Overhead Utilities)

Underground utilities such as pressurized lines, water, telephone, buried utility, and high voltage power lines may be present throughout the facility. NSWC Crane has digging permits that must be obtained prior to any intrusive work. Therefore, all subsurface activities must be conducted following the requirements of the NSWC Crane Permit System. The Tetra Tech NUS SOP for "Utility Locating and Excavation Clearance (HS-1.0)" is included as a backup to the NSWC Crane policies. A copy of this SOP is provided as Attachment III. Clearance of underground and overhead utilities for each location will be coordinated with the Site Contact. Additionally, DPT operations will be conducted at a safe distance from overhead power lines. In certain cases, there may be a need to de-energize electrical cables using facility lockout/tagout procedures to insure electrical hazards are eliminated.

6.2.4 Heat Stress

Because some physically demanding field work is expected to take place during warmer months or periods, heat related disorders are a potential problem. Discussed below are the common heat-related disorders and the recommended actions to prevent heat stress.

Heat Related Disorders

Heat Rash

Also known as prickly heat, this condition affects the skin. It occurs in situations where the skin remains wet most of the time. The sweat ducts become plugged and a skin rash soon appears.

Signs and Symptoms:

- Skin rash will appear on affected areas of the body.
- Tingling or prickling sensation will be felt on the affected areas.

Heat Cramps

Heat cramps are muscle pains, usually in the lower extremities, the abdomen, or both, that occur after profuse sweating with accompanying salt depletion. Heat cramps most often afflict people in good physical condition, who overwork in conditions of high temperature and humidity. Untreated, heat cramps may progress to heat exhaustion.

Signs and Symptoms:

- Cramps in the extremities and abdomen that begin suddenly during vigorous activity. Heat cramps can be mild with only slight abdominal cramping and tingling in the extremities, but more commonly present intense and incapacitating pain in the abdomen and extremities.
- Respiration rate will increase, decreasing after the pain subsides.
- Pulse rate will increase
- Skin will be pale and moist.
- Body temperature will be normal
- Generalized weakness will be noted as the pain subsides.
- Loss of consciousness and airway maintenance are seldom problems with this condition.

Treatment for heat cramps is aimed at eliminating the exposure and restoring the loss of salt and water.

Heat Exhaustion

Heat exhaustion is a more severe response to salt and water loss, as well as an initial disturbance in the body's heat-regulations system. Like heat cramps, heat exhaustion tends to occur in people working in hot environments. Heat exhaustion may progress to heat stroke. Treatment for heat exhaustion is similar in principle to that for heat cramps.

Signs and Symptoms:

- Heat exhaustion may be accompanied present by a headache, fatigue, dizziness, or nausea with occasional abdominal cramping. More severe cases of heat exhaustion may resulting partial or complete temporary loss of respiration and circulation due to cerebral ischemia.
- Sweating will be profuse.
- Pulse rate will be rapid and weak.
- Respiration rate will be rapid and shallow.
- The skin will be pale and clammy
- The body temperature will be normal or decreased.
- The person could be irritable and restless.

Heat Stroke

Heat stroke is caused by a severe disturbance in the body's heat-regulating system and is a profound emergency: The mortality rate ranges from 25 to 50 percent. It is most common in men over 40, especially alcoholics. It can also occur to people of any age having too much exposure to the sun or prolonged confinement in a hot atmosphere. Heat stroke comes on suddenly. As the sweating mechanism fails, the body temperature begins to rise precipitously, reaching 106°F (41°C) or higher within 10 to 15 minutes. If the situation is not corrected rapidly, the body cells -- especially have very vulnerable cells to the brain--are literally cooked, and the central nervous system is irreversibly damaged. The treatment for heat stroke is aimed at maintaining vital functions and causing as rapid a decrease of body temperature as possible.

Signs and Symptoms:

- The person's pulse will be strong and bounding.
- The skin will be hot, dry, and flushed.
- The worker may experience headache, dizziness, and dryness of mouth
- Seizures and coma can occur.
- Loss of consciousness and airway maintenance problems can occur.

These are only guidelines for heat related emergencies. Actual training in emergency medical care or basic first aid is recommended.

Controlling Heat Stress

The SSO shall visually monitor personnel to note for signs of heat stress. Field personnel will also be instructed to observe for symptoms of heat stress and methods on how to control it. One or more of the following control measures can be used to help control heat stress:

- Provide adequate liquids to replace lost body fluids. Personnel must replace water and salt lost from sweating. Personnel must be encouraged to drink more than the amount required to satisfy thirst. Thirst satisfaction is not an accurate indicator of adequate salt and fluid replacement.
- Replacement fluids can be commercial mixes such as Gatorade®.
- Establish a work regime that will provide adequate rest periods for cooling down. This may require additional shifts of workers.
- Cooling devices such as vortex tubes or cooling vests can be worn beneath protective garments.
- Breaks are to be taken in a cool rest area (77°F is best).
- Personnel shall remove impermeable protective garments during rest periods.
- Personnel shall not be assigned other tasks during rest periods.
- Personnel shall be informed of the importance of adequate rest, acclimation, and proper diet in the prevention of heat stress.

**TABLE 6-2
HEAT STRAIN SYMPTOMS
STOP WORK IF ANY WORKER DEMONSTRATES ANY OF THE FOLLOWING**

Heart Rate	Sustained (several minutes) heart rate minus worker's age > of 180 beats per minute (bpm) measured at any time.
Body Core Temperature	> 101.3°F (38.5° C)
Recovery Heart Rate	> 110 bpm (Measured 1 minute after peak work effort)
Other symptoms	Sudden and sever fatigue, nausea, dizziness, or headache

Individuals May Be At Greater Risk of Heat Stress If:

Profuse sweating is sustained over hours
Weight loss over a shift is > 1.5% of beginning body weight
24-hour urinary sodium excretion is less than 50 nmoles

6.3 NATURAL HAZARDS

Insect/animal bites and stings, poisonous plants, and inclement weather are natural hazards that may be present given the location of activities to be conducted. As previously discussed, some portions of the site include vegetated areas which increases the potential for field crews to encounter ticks, bees, mosquitoes/insects, snakes, and poisonous vegetation.

6.3.1 Insect Bites and Stings

Insect/animal bites and stings are difficult to control given the climate and environmental setting of NSWCC Crane. However, in an effort to minimize this hazard the following control measures will be implemented where possible.

- Commercially available bug sprays and repellents will be used whenever possible – Pesticides analytical screening includes chlordane, endrin, lindane, methoxychlor, toxaphene and heptachlor. Commercially available repellants may be used providing they don't contain substances which appear on the analytical list for pesticide analysis. Products such as DEET should not be applied directly to the skin due to potential irritation. This product, when permitted for use, should be applied over clothing articles.
- Where possible, loose-fitting and light-colored clothing with long sleeves should be worn. This will also aid in insect control by providing a barrier between the field person and the insects and to provide easy recognition of crawling insects against the lighter background. Pant legs should be secured to the work-boots using duct tape to prevent access by ticks.

- Clothing/limited body checks for ticks and other crawling insects should be conducted upon exiting heavily vegetated areas. Workers should perform a more detailed check of themselves when showering in the evening. Ticks prefer moist areas of the body (arm-pits, genitals, etc.) and will migrate to those locations.
- The FOL/SSO will preview access routes and work areas in an effort to identify physical hazards including nesting areas in and around the work sites. These areas will be flagged and communicated to site personnel.
- The FOL/SSO must determine if site personnel (through completion of Medical Data Sheets), suffer allergic reactions to bee and other insect stings and bites. Field crewmembers that are allergic to bites should have their emergency kit containing antihistamine and a preloaded syringe of epinephrine readily available.

Any allergies (insect bites, bee stings, etc.) must be reported on the Medical Data Sheet and to the SSO.

Tick and Mosquito Transmitted Illnesses and Diseases

Ticks and mosquitoes have been identified in the transmission of diseases including Lyme's disease and malaria. Warm months (Spring through early Fall) are the most predominant time for this hazard. Information concerning Lyme's disease including recognition, evaluation, tick removal, and control is provided in Section 4.0 of the Health and Safety Guidance Manual.

Malaria may occur when a mosquito or other infected insect sucks blood from an infected person, and the insect becomes the carrier to infect other hosts. The parasite reproduces within the mosquito, and is then passed on to another person through the biting action. Acute symptoms include chills accompanied by fever and general flu like symptoms. This generally terminates in a sweating stage. These symptoms may recur every 48 to 72 hours.

Mild infections are common and include fever, headache, and body aches, often with skin rash and swollen lymph glands. More severe infection is marked by headache, high fever, neck stiffness, stupor, disorientation, coma, tremors, occasional convulsions, paralysis and, rarely, and death (especially in the elderly and very young). The incubation period of West Nile encephalitis is usually 3 to 12 days. There is no specific therapy or vaccine against West Nile encephalitis.

Precautions include:

- Limit outdoor activities during peak mosquito times – at dusk and dawn.
- Avoid standing water
- Wear long-sleeved shirts and long pants whenever you are outdoors.
- Apply insect repellent according to manufacturers instruction to exposed skin. An effective repellent will contain 20% to 30% DEET (N,N-diethyl-meta-toluamide). Avoid products containing more than 30% DEET.
- Spray clothing with repellents containing permethrin or DEET, mosquitoes may bite through thin clothing.

6.3.2 Snakes and Other Wild Animals

Indigenous animals including snakes (poisonous and non-poisonous varieties), raccoons, and other animals native to the region may be present at the site. These animals may be encountered if work locations encroach on nesting or territories claimed by these animals.

To avoid the obvious hazards conveyed as part of a direct encounter, the following actions will be taken to minimize impact on the field crews and/or operations. The FOL/SSO will preview access routes and work locations for nesting areas or signs of animal activities (tracks, foraging areas, etc.). Identified suspect areas will be communicated to the field crews. Snake chaps will be required as a precaution.

Venomous Snakes of Indiana

There are few poisonous snakes in Indiana. Indiana's poisonous snakes are all very heavy-bodied – they look “fat.” They also have broad, spade-shaped heads that are distinctly wider than their narrow necks. The heads of non-venomous snakes are typically about the same width as their bodies. Such distinctions are not completely reliable, as some species such as water snakes can be rather stout, and many species of snakes will flatten their heads when bluffing, giving the head a spade-like shape as well. The pupils of the venomous snakes of Indiana are vertical slits rather than round. This distinction may not hold elsewhere, but works in this state.

Do not attempt to handle or kill a snake that you believe may be venomous. Simply keep at a safe distance and move on your way. Snakes do not actively seek out people and bite them. Given the chance, snakes will almost always try to escape an encounter. If you leave them alone, they will make every effort to leave you alone as well. Be very careful to avoid the head when handling dead snakes. A snake's reflexes can remain functional hours after death, and supposedly "dead" snakes have bitten people.

Copperhead - The most common venomous species is the copperhead, and even it has a restricted range in the hills of southern Indiana.

Appearance: The copperhead is a moderately large snake that typically measures 24 to 36 inches in length. Its head is reddish-brown in color and its body is tan. The body is marked with 15 to 19 mahogany lateral bands with darker edges that are wide on the sides and narrow on the back. The lateral bands are occasionally interrupted along the midline. Viewed from above, these bands appear hourglass shaped. Irregular brown spots are often found between the bands. The copperhead has a wedge-shaped head, sensory pits, and vertically elliptical "cat-like" pupils. The young are pale with a yellow tipped tail and are 8 to 9 inches in length.

Ecology: The copperhead is found primarily in high, dry, rocky and well-forested areas dominated by oaks and hickories. This species is very secretive and does not tolerate human presence. The copperhead is active at night the warmest part of the year and is more likely to defend itself during the evening hours. It can be found resting under logs, in cracks of foundations, and under rocks. Small rodents such as mice are its primary prey, but it also eats large moth larvae and lizards.

Timber Rattlesnakes - Timber rattlesnakes are rare and usually restricted to some of the forested hills in south central Indiana.

Appearance: These snakes are Indiana's largest, averaging 48 to 72 inches in length with a rattle on the end of their tail. They can be found in the hill country of south central Indiana. The timber rattlesnake is a thick-bodied snake with a wide head distinct from the neck, typical of our venomous snakes. The color pattern of the timber rattler is very variable, ranging from sulfur yellow and buff brown, to dark gray. Regardless of the pattern, a series of wide black cross bands line the back along the length of the body. These cross bands have been described as "blunt chevrons." Its distinctly wedge-shaped head, sensory pit, and elliptical eye slits are characteristic of all snakes in the viper family.

Ecology: The timber rattlesnake is native to heavily forested areas in the hills of southern Indiana. It feeds on small mammals and birds. The timber rattler hibernates inside the cracks and crevices of rocky

hillsides. Timber rattlesnakes do not stalk their prey, but rather remain motionless and wait for their prey to move within striking distance. Populations of timber rattlesnakes are mostly limited to areas fairly isolated from human development.

Snake Bites

Initial efforts will be directed to avoid, where possible, nesting and territorial areas. However, should field personnel come in contact with these animals and receive a bite, the following actions are necessary.

- Obtain a detailed description of the snake. This and the bite mark will enable medical personnel administering medical aid to provide prompt and correct antidotes, as necessary.
- Immobilize the bite victim to the extent possible. Physical exertion will mobilize the toxins (if poisonous varieties) from the bite point systemically through the body.
- Apply a pressure wrap (for extremities), just above and over the bite area. With a couple wraps of the pressure wrap in place over the bite area, apply a splint, and continue the application of the pressure wrap. The purpose for the splint is to restrict the movement of the extremity, this along with the pressure wrap will aid in restricting the toxins from leaving the site of the bite.
- Seek medical attention immediately.

6.3.3 Poisonous Plants

Various plants which can cause allergic reactions may be encountered during field work. These include, poison ivy, poison oak, and poison sumac. Contact with these plants may occur when clearing vegetation for access to work areas, or as a result of movement through these plants. An irritating, allergic reaction can occur after direct contact with the plant or indirect contact through some piece of equipment or clothing article. Oils are transferred from the plant to exposed skin, clothing, or piece of equipment. The degree of the irritating, allergic reaction can vary significantly from one person to the next.

Protective measures to control and minimize the effects of this hazard may include, but not be limited to, the following:

- Identify plants for field personnel.
 - Poison Ivy - Characterized by climbing vines, three leaf configuration ovate to elliptical in shape, deep green leaves with a reddish tint, greenish flowers, and white berries.

- Poison Sumac - Characterized as a tall bush of the sumac family bearing compound leaves (7-13 entire leaflets), branched from a central axis, drooping, with axillary clusters of white fruit. However, these white fruits and berries may exist only during pubescent stages.
- Poison oak - Characterized as similar to poison ivy consisting of a shrub, stems erect, 0.3 to 2.0 meters tall, leaflets consist of broad thick lobes coarsely serrated configuration, denser at the base, less so than the top.
- Protective measures may include wearing disposable garments such as Tyvek when clearing brush. These may be carefully removed and disposed of along with any oils accumulated from the plants.
- Personal Hygiene - The oils obtained from the plants will only elicit an allergic response when the person's bare skin layer is contacted. This can be aggravated when skin pores are open (perspiring), or through breaks in the skin such as cuts, nicks, scratches, etc. This can also be accomplished when using excessively hot water for cleaning the skin, which also causes pores to open. Prior to break time, lunchtime, etc. personnel should wash with cool water and soap to remove as much of the oils as possible. In heavily vegetated areas of these plants, additional measures including barrier creams and blocks may be used to prevent the oils from accessing and penetrating the skin.

These plants present an airborne sensitization hazard when burned. This is not to occur as part of this scope of work and therefore will not be addressed.

6.3.4 Inclement Weather

Project tasks under this Scope of Work will be performed outdoors. As a result, inclement weather may be encountered. In the event that adverse weather conditions arise (electrical storms, tornados, hailstorms, etc.), the FOL and/or the SSO will be responsible for temporarily suspending or terminating activities until hazardous conditions no longer exist.

6.3.5 Working On or Near Bodies of Water (April 2006)

As part of performing the Bathymetry Survey will bring personnel along into and over water. The principal hazards associated with working on or near bodies of water include drowning and severe cold stress, up to and including hypothermia.

6.3.5.1 Marine Safe Work Practices (i.e., working from small water vessels/boats) (April 2006)

To avoid potential hazards associated with working near water (drowning), the field team shall employ lifelines (tie-off procedure), safety harnesses, or some other means of extraction when within 4 feet of the water edge. When working out of a boat, U.S. Coast Guard (USCG) approved personal flotation devices (PFD) will be on hand for all participants and will be used. Due to the obvious hazards associated with working on or near water edge during inclement weather, field activities may be temporarily suspended or terminated at the discretion and direction of the FOL or SSO.

U.S.C.G. Flotation Device Types

Use the following information to determine the proper type of U.S.C.G. PFD.

Off Shore Life Jacket (Type I, 22lbs buoyancy). Type I life jacket is the best choice for rough or open waters. This type will float you the best and is favorable if rescue may be long in coming. This type will turn an unconscious person upright in the water. Though is bulky it does have a highly visible color for easier detection.

Near Shore Buoyant Vest (Type II, 15.5lbs buoyancy). Type II is a good choice for calmer waters. It will turn most unconscious persons face-up in the water. Though it is less bulky than Type I, it is not intended for long hours in calm or rough water.

Flotation Aid (Type III, 15.5lbs buoyancy). Type III is probably the most comfortable device offering more freedom of movement, such as water skiing or fishing, but is not intended for rough water. Also, an unconscious person may end up face-down in the water.

Throwable Devices (Type IV). Throwable devices are intended for calm waters with heavy boat traffic where help is always close. It is not intended for unconscious persons or non-swimmers or long hours in the water. They are good backups for the other devices.

Site personnel shall wear Type III personal flotation devices in the event someone falls overboard, boats sinks or capsizes. Type IIIs were selected as they offer the most flexibility for working while still meeting minimum requirements for bouyancy. In situations where personal flotation devices cannot be worn due to the task to be conducted, the flotation devices shall be immediately available/accessible. It is recommended that personal flotation devices be continually worn during colder months due to the potential for hypothermia to restrict muscle movement and therefore, self rescue and maintaining

buoyancy. In addition, a single Type IV Throwable Flotation Device shall be maintained on board the boat or shoreline if field crews have a person manning that position with at least 90 feet of 3/8 polypropylene line.

U.S.C.G Boat Regulations

No person born on or after January 1, 1986 shall operate a vessel that is fitted with propulsion machinery of more than ten (10) horsepower on waterways unless the person has successfully completed a boating safety education program as approved by the director of the Department of Environmental Management. For this task a Jon Boat with oars will be employed. No mechanical means of propulsion will be used.

The U.S.C.G. requires boats to have the following equipment on board:

- One personal flotation device per person

Vessels Required to be Registered in Indiana. All vessels, whether commercial or recreational, must be registered in Indiana if it is equipped with any kind of primary or auxiliary mechanical propulsion.

All vessels used in support of this project must undergo a Vessel Safety Check provided by the USCG.

Vessel Safety Checklist	Yes	No	Not Applicable
Display of numbers*			X
Registration / documentation*			X
Life jackets (PFDs)*			
Visual distress signals (VDS)*			X
Fire extinguishers*			X
Ventilation*			X
Backfire flame control*			X
Sound-producing devices*			
Navigation lights*			X
Pollution placard*			X
MARPOL garbage placard*			X
Marine sanitation devices*			X
Presence of Navigation Rules*			X
Unique state and/or local requirements*			X
Overall vessel condition*			

Vessel Safety Checklist	Yes	No	Not Applicable
Deck free of hazards and clean bilge*			
Safe electrical and fuel systems*			X
Safe galley and heating systems*			X
Marine VHF radio			X
Dewatering device & backup			X
Mounting of fire extinguishers			X
Anchor & line for area			
First Aid and PIW kits			
Inland visual distress signals			X
Capacity certificate of compliance			X
Owner responsibility for accident reporting			X
Offshore operations			X
Nautical charts and navigation aids			X
Survival and first aid tips			X
Fueling and fuel management			X
Float plan filing and weather & sea conditions			X
Insurance considerations			X
Boating checklist			X
Safe boating classes			X

7.0 AIR MONITORING

Direct reading instruments will be used at the site to evaluate the presence of contaminants and other potentially hazardous conditions. Air monitoring measurements and requirements are established in Table 5-1 pertaining to the specific task and operations. Additionally, the Health and Safety Guidance Manual, Section 1.0, contains detailed information regarding direct reading instrumentation, as well as general calibration procedures of various instruments.

7.1 INSTRUMENTS AND USE

Instruments will be used primarily to monitor source points and worker breathing zone areas, while observing instrument action levels. Action levels are discussed in Table 5-1 as they may apply to a specific task or location.

7.1.1 Photoionization Detector or Flame Ionization Detector

In order to accurately monitor for any substances that may present an exposure potential, a Photoionization Detector (PID) using a lamp energy of 10.6 eV or higher will be used. This instrument will be used to monitor potential source areas (boreholes, monitoring wells, etc.) and to screen the breathing zones of employees during site activities. The PID has been selected because it is capable of detecting potential organic vapors of concern including TCE. (**NOTE:** A Flame Ionization Detector [FID] may be used as an alternative to the PID).

Prior to the commencement of any field activities, the background levels of the site must be determined and noted. Daily background readings will be taken away from any areas of potential contamination. These readings, any influencing conditions (i.e., weather, temperature, humidity) and site location must be documented in the field operations logbook or other site documentation (e.g., sample log sheet).

7.1.2 **Four Gas Air Monitoring Instrument for LEL, O₂, CO, NO₂**

A direct-read four gas detector such as a MSA Passport or equivalent will be used during all soil boring and concrete coring operations performed in Buildings 106 and 107 to evaluate airborne concentrations of carbon monoxide, oxygen, lower explosive limit and nitrogen dioxide. Although other exhaust gases may be present, carbon monoxide and nitrogen dioxide has been selected as the primary indicator compounds to determine potential exposure concerns. Conservative action levels for these gases have been established to prevent potential exposures to other exhaust gas compounds including oxides nitrogen and sulfur.

7.1.2 Hazard Monitoring Frequency

Table 5-1 presents the frequencies that hazard monitoring will be performed as well as the action levels which will initiate the use of elevated levels of protection. The SSO may decide to increase these frequencies based on instrument responses and site observations. The frequency at which monitoring is performed will not be reduced without the prior consent of the PHSO or HSM.

7.2 INSTRUMENT MAINTENANCE AND CALIBRATION

Hazard monitoring instruments will be maintained and pre-field calibrated by the TtNUS Equipment Manager. Operational checks and field calibration will be performed on the instruments each day prior to their use. Field calibration will be performed on instruments according to manufacturer's recommendations (for example, the PID must be field calibrated daily and an additional field calibration must be performed at the end of each day to determine any significant instrument drift). These operational checks and calibration efforts will be performed in a manner that complies with the employees health and safety training, the manufacturer's recommendations, and with the applicable manufacturer standard operating procedure (copies of which can be found in the Health & Safety Guidance Manual which will be maintained on site for reference). Calibration efforts must be documented. Figure 7-1 is provided for documenting these calibration efforts. This information may instead be recorded in a field operations logbook, provided that the information specified in Figure 7-1 is recorded. This required information includes the following:

- Date calibration was performed
- Individual calibrating the instrument
- Instrument name, model, and serial number
- Any relevant instrument settings and resultant readings (before and after) calibration
- Identification of the calibration standard (lot no., source concentration, supplier)
- Any relevant comments or remarks

7.3 DOCUMENTING INSTRUMENT READINGS

The SHSO is responsible for ensuring that air monitoring instruments are used in accordance with the specifications of this HASP and with manufacturer's specifications/recommendations. In addition, the SHSO is also responsible for ensuring that all instrument use is documented. This requirement can be satisfied either by recording instrument readings on pre-printed sampling log sheets or in a field log book.

This includes the requirement for documenting instrument readings that indicate no elevated readings above noted daily background levels (i.e., no-exposure readings). At a minimum, the SHSO must document the following information for each use of an air monitoring device:

- Date, time, and duration of the reading
- Site location where the reading was obtained
- Instrument used (e.g., PID, FID, LEL/O₂ meter, etc.)
- Personnel present at the area where the reading was noted
- Other conditions that are considered relevant to the SHSO (such as weather conditions, possible instrument interferences, etc.)

8.0 TRAINING/MEDICAL SURVEILLANCE REQUIREMENTS

8.1 INTRODUCTORY/REFRESHER/SUPERVISORY TRAINING

8.1.1 Requirements for TtNUS Personnel

TtNUS field personnel must complete 40 hours of introductory hazardous waste site training in accordance with 29 CFR 1910.120(e) prior to performing work at NSWCC Crane. Additionally, TtNUS personnel who have had introductory training more than 12 months prior to site work must have completed 8 hours of refresher training within the past 12 months before being cleared for site work. 8-hour Supervisory Training in accordance with 29 CFR 1910.120(e)(4) will be required for site supervisory personnel.

Documentation of TtNUS Health and Safety Training will be maintained at the project site. Copies of certificates or other official documentation will be used to fulfill this requirement.

At the request of the U.S. Navy, prior to initiation of field work the SSO and FOL will meet with the Navy Point of Contact and other NSWCC Crane Emergency Staff to review planned operations. TtNUS will also conduct brief daily meetings to discuss operations planned for that day. At the end of the workday, a short meeting will be held to discuss the operations completed and any problems that were encountered.

8.1.2 Requirements for Subcontractors

TtNUS subcontractor drilling personnel must have completed introductory hazardous waste site training or equivalent work experience as defined in OSHA Standard 29 CFR 1910.120(e) and 8 hours of refresher training meeting the requirements of 29 CFR 1910.120(e)(8) prior to performing field work at NSWCC Crane. Surveyors are only required to have the OSHA HAZWOPER training when they could possibly be exposed to hazardous chemicals. TtNUS subcontractors must certify that each employee has had such training by sending TtNUS a letter, on company letterhead, containing the information in the example letter provided in Figure 8-1, and providing copies of training certificates.

FIGURE 8-1
TRAINING LETTER

The following statements must be typed on company letterhead and signed by an officer of the company and accompany copies of associated training certificates:

LOGO
XYZ CORPORATION
555 E. 5th Street
Nowheresville, Kansas 55555

Month, day, year

Ralph Basinski
Task Order Manager
Tetra Tech NUS
Foster Plaza 7
661 Andersen Drive
Pittsburgh, Pennsylvania 15220

Subject: HAZWOPER Training for NSWCC Crane

Dear Mr. Basinski:

As an officer of XYZ Corporation, I hereby state that I am aware of potential hazardous nature of the subject project. I also understand that it is our responsibility to comply with applicable occupational safety and health regulations including those stipulated in Title 29 of the Code of Federal Regulations (CFR), Parts 1900 through 1910 and Part 126.

I also understand that Title 29 CFR 1910.120 entitled "Hazardous Waste Operations and Emergency Response" requires appropriate level of training for certain employees engaged in hazardous waste operations. In this regard, I hereby state that the following employees have had 40 hours of introductory hazardous waste site training or equivalent work experience as requested by 29 CFR 1910.120(e) and have had 8 hours of refresher training as required by 29 CFR 1910.120(e)(8),

LIST FULL NAMES OF EMPLOYEES AND THEIR SOCIAL SECURITY NUMBERS HERE

Should you have any questions, please contact me at (555) 555-5555.

Sincerely,

(Name of Company Officer)

8.2 SITE-SPECIFIC TRAINING

TtNUS will provide site-specific training to TtNUS employees and subcontractor personnel who will perform work on this project. Site-specific training will also be provided to site visitors (DOD, EPA, etc.) who may enter the site to perform functions that may or may not be directly related to site operations. Site-specific training will include:

- Names of personnel and alternates responsible for site safety and health
- Safety, health and other hazards present on site
- Use of personal protective equipment
- Work practices to minimize risks from hazards
- Safe use of engineering controls and equipment
- Medical surveillance requirements
- Signs and symptoms of overexposure to site contaminants
- The contents of the site-specific health and safety plan including the contents of Table 5-1 and 6-1.
- Emergency response procedures (evacuation and assembly points)
- Spill response procedures
- Review the contents of relevant Material Safety Data Sheets
- Review Safe Work Permits

Site-specific documentation will be established through the use of Figure 8-2. Site personnel and visitors must sign this document upon receiving site-specific training prior to commencement of site activities.

8.3 MEDICAL SURVEILLANCE

8.3.1 Medical Surveillance Requirements For TtNUS Personnel

TtNUS personnel participating in project field activities will have had a physical examination meeting the requirements of TtNUS' medical surveillance program and will be medically qualified to perform hazardous waste site work using respiratory protection.

Documentation for medical clearances will be maintained in the TtNUS Pittsburgh office and made available as necessary.

8.3.2 Medical Surveillance Requirements For Subcontractors

Subcontractor personnel are required to obtain a certificate of their ability to perform hazardous waste site work and to wear respiratory protection. The "Subcontractor Medical Approval Form" provided in Figure 8-3 of this HASP shall be used to satisfy this requirement providing that it is properly completed and signed by a licensed physician.

Subcontractors who have a company medical surveillance program meeting the requirements of paragraph (f) of OSHA 29 CFR 1910.120 can substitute "Subcontractor Medical Approval Form" with a letter, on company letterhead, containing the information in the example letter presented in Figure 8-4.

8.3.3 Requirements for All Field Personnel

Each field team member (including subcontractors and visitors entering the exclusion zone) shall be required to complete and submit a copy of the Medical Data Sheet found in the TtNUS Health and Safety Guidance Manual. This shall be provided to the SSO prior to participating in site activities. The purpose of this document is to provide site personnel and emergency responders with additional information that may be necessary in order to administer medical attention.

8.4 **SUBCONTRACTOR EXCEPTION**

Subcontractors and surveyors who will not enter the exclusion zone during operation, and whose activities involve no potential for exposure to site contaminants, will not be required to meet the requirements for training/medical surveillance, other than site-specific training as stipulated in Section 8-2. **The use of this type of exemption is permissible only with the prior consent of the TtNUS HSM.**

FIGURE 8-3

SUBCONTRACTOR MEDICAL APPROVAL FORM

For employees of _____
Company Name

Participant Name: _____ Date of Exam: _____

Part A

The above-named individual has:

1. Undergone a physical examination in accordance with OSHA Standard 29 CFR 1910.120, paragraph (f) and found to be medically -
 qualified to perform work at the NSWCrane work site
 not qualified to perform work at the NSWCrane work site
and,
2. Undergone a physical examination as per OSHA 29 CFR 1910.134(b)(10) and found to be medically -
 qualified to wear respiratory protection
 not qualified to wear respiratory protection

My evaluation has been based on the following information, as provided to me by the employer.

- A copy of OSHA Standard 29 CFR 1910.120 and appendices.
- A description of the employee's duties as they relate to the employee's exposures.
- A list of known/suspected contaminants and their concentrations (if known).
- A description of any personal protective equipment used or to be used.
- Information from previous medical examinations of the employee which is not readily available to the examining physician.

Part B

I, _____, have examined _____
Physician's Name (print) Participant's Name (print)

and have determined the following information:

**FIGURE 8-3
SUBCONTRACTOR MEDICAL APPROVAL FORM
PAGE TWO**

1. Results of the medical examination and tests (excluding finding or diagnoses unrelated to occupational exposure):

2. Any detected medical conditions that would place the employee at increased risk of material impairment of the employee's health:

3. Recommended limitations upon the employee's assigned work:

I have informed this participant of the results of this medical examination and any medical conditions that require further examination or treatment.

Based on the information provided to me, and in view of the activities and hazard potentials involved at the NSWCC Crane work site, this participant

- may
 may not

perform his/her assigned task.

Physician's Signature _____

Address _____

Phone Number _____

NOTE: Copies of test results are maintained and available at:

Address

FIGURE 8-4

MEDICAL SURVEILLANCE LETTER

The following statements must be typed on company letterhead and signed by an officer of the company:

LOGO
XYZ CORPORATION
555 E. 5th Street
Nowheresville, Kansas 55555

Month, day, year

Ralph Basinski
Task Order Manager
Tetra Tech NUS
Foster Plaza 7
661 Andersen Drive
Pittsburgh, Pennsylvania 15220

Subject: Medical Surveillance for NSWC Crane

Dear Mr. Basinski:

As an officer of XYZ Corporation, I hereby state that the persons listed below participate in a medical surveillance program meeting the requirements contained in paragraph (f) of Title 29 of the Code of Federal Regulations (CFR), Part 1910.120 entitled "Hazardous Waste Operations and Emergency Response." I further state that the persons listed below have had physical examinations under this program within the past 12 months and that they have been cleared, by a licensed physician, to perform hazardous waste site work and to wear positive and negative pressure respiratory protection. I also state that, to my knowledge, no person listed below has any medical restriction that would preclude him/her from working at the NSWC Crane Site.

LIST FULL NAMES OF EMPLOYEES AND THEIR SOCIAL SECURITY NUMBERS HERE

Should you have any questions, please contact me at (555) 555-5555.

Sincerely,

(Name of Company Officer)

9.0 SPILL CONTAINMENT PROGRAM

9.1 SCOPE AND APPLICATION

During this operation hazardous soils and waters are not expected to be encountered. Decontamination fluids will be collected and discharged into the NSW Crane sanitary sewer system at a designated location. Soil cuttings will be screened for VOC's. If readings are at background levels, the soil will be mixed with bentonite and used to fill the boring or if non hazardous spread on the ground surface.

9.2 HAZARDOUS SOILS AND FLUIDS

Quantities of bulk potentially hazardous materials (greater than 55-gallons) will not be handled during site activities conducted as part of the scope of work. If for some reason significant quantities of hazardous waste water (decontamination, and purge) and hazardous IDW is generated as part of site activities the following procedures will be applied. As needed, 55 -gallon drums will be used to contain hazardous waste waters, IDW, and other unwanted items generated during investigatory activities. These drums will be labeled with the site name, drum number, the type of contents (purge waters), volume, the date, point of contact with telephone number.

Samples will be analyzed to characterized the material and determine appropriate disposal measures. Once characterized they can be removed from the staging area and disposed of in accordance with Federal, State and local regulations.

9.3 POTENTIAL SPILL AREAS

Potential spill areas will be monitored in an ongoing attempt to prevent and control further potential contamination of the environment. Currently, there are various areas vulnerable to this hazard including the following:

- Areas used for central staging of resources
- Areas used for central staging of IDW materials
- Areas where heavy equipment is used
- Decontamination area

Additionally, areas designated for handling, loading, and unloading of potentially contaminated waters, and debris present limited potential for leaks or spills. Monitoring of these areas will be done at least weekly.

Hydraulic oil releases from broken lines on heavy equipment are common causes of spills. This will be monitored when heavy equipment is in use.

9.3.1 Site Drums/Containers

Drums/containers used for containing liquids will be sealed, labeled, and staged within a centralized area awaiting shipment or disposal. Drums used for the storage and transportation of IDW will meet the packaging requirements for steel drums category U.N. 1A2, removable head as specified in paragraph 9.6.1, United Nations Transport of Dangerous Goods.

Staging Area Configuration

The staging area will be configured to support this spill prevention and control program. The area will be configured as follows:

- Where possible secondary containment will be provided. For liquids, this will include a bermed area sufficient in size to hold 10% of the total volume of liquids or the volume of largest container, whichever is greater. This calculation of secondary containment will also consider any displacement by containers or pallets. This bermed area will be lined (plastic liner or other impermeable surface) to prevent any spillage inside the containment from saturating the ground.
- Drums will be organized no more than four to a pallet. The drums label and the head bolt arranged as such to permit reading/review or removal of the head without requiring the drum to be moved on the pallet. Drums will be segregated to site and media. A minimum of two feet shall be maintained between each row of pallets to permit access for spill response measures.

9.4 LEAK AND SPILL DETECTION

To establish an early detection of potential spills or leaks, a periodic (once a week) walk around by the SSO will be conducted during working hours to visually determine that containers are not leaking. If a leak is detected, the first approach will be to transfer the container contents using a hand pump into a new container. Other provisions for the transfer of container contents will be made and appropriate emergency contacts will be notified, if necessary. In most instances, leaks will be collected and contained using absorbents such as oil-dry, vermiculite, or sand, which will be stored at the staging area in a conspicuously marked drum. This material too, will be containerized for disposal pending analyses. Inspections will be documented in the project logbook.

9.5 PERSONNEL TRAINING AND SPILL PREVENTION

Personnel will be instructed on the procedures for spill prevention, containment, and collection of hazardous materials in the site-specific training. The FOL and/or the SSO will serve as the Spill Response Coordinator for this operation should the need arise.

9.6 SPILL PREVENTION AND CONTAINMENT EQUIPMENT

The following represents the minimum equipment which will be maintained at the staging area for the purpose of supporting this Spill Prevention/Containment Program.

Spill Response Equipment:

- Sand, clean fill, vermiculite, or other noncombustible absorbent (oil-dry);
- Drums (55-gallon U.N 1A2)
- Portable storage tanks or additional drums
- Shovels, rakes, and brooms
- Labels

PPE stored at the staging area:

- Rubber boot covers, nitrile outer gloves, PVC rain-suit or other form of impermeable splash protection, should it be required.

9.7 SPILL CONTROL PLAN

This section describes the procedures the TiNUS field crew members will employ upon the detection of a spill or leak.

- 1) Notify the SSO or FOL immediately upon the detection of a leak or spill.
- 2) Notify the NSWCC Crane environmental Protection Department of releases, even those which the field crew/personnel are able to handle.
- 3) Employ the personnel protective equipment stored at the staging area. Take immediate actions to stop the leak or spill by plugging or patching the drum or raising the leak to the highest point. Spread the absorbent material in the area of the spill covering completely.

- 4) Transfer the material to a new container, collect and containerize the absorbent material. Label the new container appropriately. Await analyses for treatment or disposal options.
- 5) Spills occurring on soils, grassy areas, gravel lots will be re-containerized including 2-inches of top cover on which the spill occurred, and await test results for treatment or disposal options.

It is not anticipated that a spill will occur in which the field crews cannot handle. Should this occur notification of appropriate emergency response agencies will be carried out by the FOL or SSO.

10.0 SITE CONTROL

This section outlines the means by which TtNUS will delineate work zones and use these work zones in conjunction with decontamination procedures to prevent the spread of contaminants into previously unaffected areas of the site. It is anticipated that a three-zone approach will be used during work at this site. This three zone approach will utilize an exclusion zone, a contamination reduction zone, and a support zone. It is also anticipated that this control measure will be used to control access to site work areas. Use of such controls will restrict the general public, minimize the potential for the spread of contaminants, and protect individuals who are not cleared to enter work areas.

10.1 EXCLUSION ZONE

The exclusion zone will be considered those areas of the site of known or suspected contamination. It is not anticipated that significant amounts of surface contamination are present in the proposed work areas of this site. The exclusion zone for this activity will be divided to represent the areas where the soil is disturbed through intrusive activities. When necessary, exclusion zones will be delineated using barrier tape, cones and/or drive poles, and postings to inform personnel other than the field crew. The exclusion zones for this project will be limited to those areas of the site where active work is being performed:

- Soil Boring Activity (HSA, DPT). The exclusion zone for this activity will be set at the height of the mast, plus five feet surrounding the point of operation, with a minimum of 25 feet. This distance will also apply when subsurface soil sampling from behind these type rigs.
- Decontamination operation. The exclusion zone for this activity will be set at 25 feet surrounding the gross contamination wash and rinse as well as 25 feet surrounding the heavy equipment decontamination area.
- Groundwater, sediment, and surface water sampling. The exclusion zone for this activity will be set at 10 feet surrounding the monitoring well or sampling location.
- IDW area will be delineated. Only authorized personnel should be allowed access.

10.1.1 Exclusion Zone Clearance

Access to work areas will be controlled by TtNUS personnel. No persons will be permitted to enter site exclusion zones without site-specific training. Site visitors will be provided site-specific training and will be escorted by TtNUS personnel (see Section 10.4).

10.2 CONTAMINATION REDUCTION ZONE

The contamination reduction zone (CRZ) will be a buffer area between the exclusion zone and any area of the site where contamination is not suspected. The personnel and equipment decontamination will not take place in this area, but will take place at a central location established for this project. This area instead will serve as a focal point in supporting exclusion zone activities. When applicable, this area will be delineated using barrier tape, cones and/or drive poles, and postings to inform and direct facility personnel.

10.3 SUPPORT ZONE

The support zone for this project will be the area where site vehicles will be parked, equipment will be unloaded, and where food and drink containers will be maintained. The support zones will be established at areas of the site where exposure to site contaminants would not be expected during normal working conditions or foreseeable emergencies.

10.4 SITE VISITORS

Site visitors for the purpose of this document are identified as representing the following groups of individuals:

- Personnel invited to observe or participate in operations by TtNUS
- Regulatory personnel (EPA, OSHA, etc.)
- NSWCrane or DOD Personnel
- Other authorized visitors

Personnel working on this project are required to gain initial access to the NSWCrane by coordinating with the TtNUS FOL or designee and following established NSWCrane access procedures.

Once access to NSWCrane is obtained personnel who require site access into areas of ongoing operations will be required to obtain permission from the FOL and SSO. The prerequisites for site visitors wishing to observe operations in progress in the exclusion zone are discussed below:

- Site visitors will be routed to the FOL, who will sign them into the field logbook. Information to be recorded in the logbook will include the individual's name (proper identification required), the entity which they represent, and the purpose of the visit.
- Site visitors will be required to produce the necessary information supporting clearance to the site. This shall include information attesting to applicable training (40-hours of HAZWOPER training) and

medical surveillance as stipulated in Section 8.0 of this document. In addition, to enter the site operational zones during planned activities, visitors will be required to first go through site-specific training covering the topics stipulated in Section 8.2 of this HASP.

Once the site visitors have completed the above items, they will be permitted to enter the operational zone. Visitors are required to observe the protective equipment and site restrictions in effect at the site at the time of their visit. Any unauthorized site visitation will cause the termination of on-site activities until the unauthorized visitor is removed from the area. Removal of unauthorized visitors will be accomplished with support from the Base Contact and Base Security. Site visitors granted access to the exclusion zones during ongoing operations will be escorted by a TtNUS representative (arranged for by the FOL) while the visitor remains in the exclusion zone.

10.5 SITE SECURITY

TtNUS will retain control over active operational areas. The FOL will serve as a focal point for site personnel, and will serve as the final line of security for the work areas. Work will cease in the event of unauthorized personnel entering the exclusion zone. Work will remain temporarily suspended until the unauthorized visitor can be removed. The Base Contact will serve as the primary enforcement contact for removing unauthorized visitors.

10.6 SITE MAP

Once the areas of contamination, access routes, utilities, topography, and dispersion routes are determined, a site map will be generated and adjusted as site conditions change. These maps will show utility locations, potential points of contact with the public, roadways, and other significant characteristics that may impact site operations and safety. Site maps will be posted to illustrate up-to-date collection of contaminants and adjustment of zones and access points.

10.7 BUDDY SYSTEM

Personnel engaged in on-site activities will practice the "buddy system" to ensure the safety of the personnel involved in this operation.

10.8 MATERIAL SAFETY DATA SHEET (MSDS) REQUIREMENTS

TtNUS personnel will provide MSDSs for chemicals brought on-site. The contents of these documents will be reviewed by the SSO with the user(s) of the chemical substances prior to any actual use or application of these substances on site. A chemical inventory of chemicals used on site will be developed. (See Section 5.0 of the Health and Safety Guidance Manual) A copy of the Chemical Inventory List will be

provided to the Fire Department, as they would serve as primary responders to the work/storage building should the need arise. The MSDSs will then be maintained in a central location and will be available for anyone to review upon request.

10.9 COMMUNICATION

As personnel may not always be working in proximity to one another during field activities, a supported means of communication between field crews will be used as necessary. As a result, two-way radio communication devices will be used by field personnel while at the site. Two-way radio communications intended for use at NSWC Crane, will have GSA approval prior to being brought on-site for use.

External communication will be accomplished by using provided telephones at the site. External communication will primarily be used for the purpose of resource and emergency resource communications. If site personnel will be working in remote locations or if site activities are conducted in separate sites simultaneously, two-way radios will be used to communicate between teams of workers. In areas where radios do not work or site personnel are not in close proximity a check in procedure will be established.

- Site personnel will check in with the site FOL every 3 hours.
- A daily activities log will be established and kept in the TtNUS field office. The list will include the location of all Crane TtNUS field personnel for that day.
- TtNUS personnel will only work in those assigned locations. Deviation from the established work schedule will only be granted with the approval of the TtNUS FOL.
- When work is completed at the assigned location/s TtNUS field personnel will return to the TtNUS field office for further assignment.

10.10 SAFE WORK PERMITS

Work conducted in support of this project will be performed using Safe Work Permits to guide and direct field crews on a task by task basis. An example of the permit to be used is illustrated in Figure 10-1. Attachment V contains partially completed permits for tasks that are to be performed as part of the investigation. Information such as field crew performing the task, date, time, procedure reviews, and equipment preparation information need to be completed by the FOL or SSO prior to the initiation of site activities. The Safe Work Permit will be further supported by the daily safety meetings. This effort will ensure site-specific considerations and changing conditions are incorporated into the planning effort.

Permits will require the signature of the FOL and/or SSO. Personnel engaged in on-site activities will be aware of the elements indicating levels of protection and precautionary measures to be used.

Use of these permits will provide the communication line for reviewing protective measures and hazards associated with each operation. This HASP will be used as the primary reference for selecting levels of protection and control measures. The Safe Work Permit will take precedence over the HASP when more conservative measures are required based on specific site conditions.

Upon completion of work specified on the Safe Work Permit, the person accepting the permit will return it to the SSO.

Any problems encountered regarding control measures taken will be annotated on the permit or a separate sheet of paper and returned to the SSO for review and evaluation.

**FIGURE 10-1
SAFE WORK PERMIT**

Permit No. _____ Date: _____ Time: From _____ to _____

SECTION I: General Job Scope (To be filled in by person performing work)

- I. Work limited to the following (description, area, equipment used): _____

- II. Names: _____
- III. On-site Inspection conducted Yes No Initials of Inspector TINUS

SECTION II: General Safety Requirements (To be filled in by permit issuer)

- IV. Protective equipment required Respiratory equipment required
- | | | | |
|----------------------------------|----------------------------------|--|---|
| Level D <input type="checkbox"/> | Level B <input type="checkbox"/> | Full face APR <input type="checkbox"/> | Escape Pack <input type="checkbox"/> |
| Level C <input type="checkbox"/> | Level A <input type="checkbox"/> | Half face APR <input type="checkbox"/> | SCBA <input type="checkbox"/> |
| Detailed on Reverse | | PAPR <input type="checkbox"/> | Bottle Trailer <input type="checkbox"/> |
| | | Skid Rig <input type="checkbox"/> | None <input type="checkbox"/> |

Modifications/Exceptions: _____

V. Chemicals of Concern	Action Level(s)	Response Measures
_____	_____	_____
_____	_____	_____

- VI. Additional Safety Equipment/Procedures
- | | | | |
|-------------------------------------|--|--------------------------------------|--|
| Hard-hat..... | <input type="checkbox"/> Yes <input type="checkbox"/> No | Hearing Protection (Plugs/Muffs) ... | <input type="checkbox"/> Yes <input type="checkbox"/> No |
| Safety Glasses | <input type="checkbox"/> Yes <input type="checkbox"/> No | Safety belt/harness | <input type="checkbox"/> Yes <input type="checkbox"/> No |
| Chemical/splash goggles..... | <input type="checkbox"/> Yes <input type="checkbox"/> No | Radio..... | <input type="checkbox"/> Yes <input type="checkbox"/> No |
| Splash Shield..... | <input type="checkbox"/> Yes <input type="checkbox"/> No | Barricades..... | <input type="checkbox"/> Yes <input type="checkbox"/> No |
| Splash suits/coveralls | <input type="checkbox"/> Yes <input type="checkbox"/> No | Gloves (Type)..... | <input type="checkbox"/> Yes <input type="checkbox"/> No |
| Steel toe Work shoes or boots | <input type="checkbox"/> Yes <input type="checkbox"/> No | Work/rest regimen..... | <input type="checkbox"/> Yes <input type="checkbox"/> No |
- Modifications/Exceptions: _____

- VII. Procedure review with permit acceptors Yes NA
- | | | | | | |
|---|--------------------------|--------------------------|-------------------------|--------------------------|--------------------------|
| Safety shower/eyewash (Location & Use)..... | <input type="checkbox"/> | <input type="checkbox"/> | Emergency alarms..... | <input type="checkbox"/> | <input type="checkbox"/> |
| Procedure for safe job completion..... | <input type="checkbox"/> | <input type="checkbox"/> | Evacuation routes | <input type="checkbox"/> | <input type="checkbox"/> |
| Contractor tools/equipment/PPE inspected..... | <input type="checkbox"/> | <input type="checkbox"/> | Assembly points..... | <input type="checkbox"/> | <input type="checkbox"/> |

- VIII. Site Preparation Yes No NA
- | | | | |
|--|--------------------------|--------------------------|--------------------------|
| Utility Locating and Excavation Clearance completed..... | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Equipment and Foot Traffic Routes Cleared and Established..... | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Physical Hazards Barricaded and Isolated..... | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Emergency Equipment Staged..... | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

- IX. Additional Permits required (Hot work, confined space entry, excavation etc.)..... Yes No
 If yes, complete permit required or contact Health Sciences, Pittsburgh Office

X. Special instructions, precautions: _____

Permit Issued by: _____ Permit Accepted by: _____

11.0 CONFINED SPACE ENTRY

Personnel under the provisions of this HASP are not allowed, under any circumstances, to enter confined spaces. A confined space is defined as an area that has one or more of the following characteristics:

- Is large enough and so configured that an employee can bodily enter and perform assigned work.
- Has limited or restricted means for entry or exit (for example, tanks, vessels, silos, storage bins, hoppers, vaults, and pits are spaces that may have limited means of entry).
- Is not designed for continuous employee occupancy.
- Contains or has a potential to contain a hazardous atmosphere.
- Contains a material that has the potential to engulf an entrant.
- Has an internal configuration such that an entrant could be trapped or asphyxiated by inwardly converging walls or by a floor that slopes downward and tapers to a smaller cross-section.
- Contains any other recognized, serious, safety or health hazard.

For further information on confined space consult the Health and Safety Guidance Manual or call the Manager, Health Sciences. If confined space operations are to be performed as part of the scope of work, detailed procedures and training requirements will be addressed in an addendum or the site specific health and safety plan.

12.0 MATERIALS AND DOCUMENTS

The TtNUS FOL shall ensure the following materials/documents are taken to the project site and used when required.

- A complete copy of this HASP
- Health and Safety Guidance Manual
- Incident Reports
- Medical Data Sheets
- Material Safety Data Sheets for chemicals brought on site, including decon solutions, fuels, lime, sample preservatives, calibration gases, etc.
- A full-size OSHA Job Safety and Health Poster (posted in the site trailers)
- Training/Medical Surveillance Documentation Form (Blank)
- Emergency Reference Information (Section 2.0, extra copy for posting)

12.1 MATERIALS TO BE POSTED OR MAINTAINED AT THE SITE

The following documentation is to be posted or maintained at the site for quick reference purposes. In situations where posting these documents is not feasible, (such as no office trailer); these documents should be separated and immediately accessible.

Chemical Inventory Listing (posted) - This list represents chemicals brought on-site, including decontamination solutions, sample preservations, fuel, etc.. This list should be posted in a central area.

Material Safety Data Sheets (MSDS) (maintained) - The MSDSs should also be in a central area accessible to site personnel. These documents should match the listings on the chemical inventory list for substances used on-site. It is acceptable to have these documents within a central folder and the chemical inventory as the table of contents.

The OSHA Job Safety & Health Protection Poster (posted) - this poster, as directed by 29 CFR 1903.2 (a)(1), should be conspicuously posted in places where notices to employees are normally posted. Each FOL shall ensure that this poster is not defaced, altered, or covered by other material.

Site Clearance (maintained) - This list is found within the training section of the HASP (See Figure 8-2). This list identifies site personnel, dates of training (including site-specific training), and medical surveillance. The list indicates not only clearance but also status. If personnel do not meet these requirements, they do not enter the site while site personnel are engaged in activities.

Emergency Phone Numbers and Directions to the Hospital(s) (posted) - This list of numbers and directions will be maintained at phone communications points and in each site vehicle.

Medical Data Sheets/Cards (maintained) - Medical Data Sheets will be filled out by on-site personnel and filed in a central location. The Medical Data Sheet will accompany any injury or illness requiring medical attention to the medical facility. A copy of this sheet or a wallet card will be given to personnel to be carried on their person.

Hearing Conservation Standard (29 CFR 1910.95) (posted) - this standard will be posted anytime hearing protection or other noise abatement procedures are employed.

Personnel Monitoring (maintained) - Results generated through personnel sampling (levels of airborne toxins, noise levels, etc.) will be posted to inform individuals of the results of that effort.

Placards and Labels (maintained) - Where chemical inventories have been separated because of quantities and incompatibilities, these areas will be conspicuously marked using DOT placards and acceptable (Hazard Communication 29 CFR 1910.1200(f)) labels.

The purpose of maintaining or posting this information, as stated above, is to allow site personnel quick access. Variations concerning location and methods of presentation are acceptable, providing the objection is accomplished.

13.0 GLOSSARY

ACGIH	American Conference of Governmental Industrial Hygienists
AOC	Area of Concern
APR	Air Purifying Respirators
CAAA	Crane Army Ammunition Activity
CFR	Code of Federal Regulations
CIH	Certified Industrial Hygienist
CLEAN	Comprehensive Long-Term Environmental Action Navy
CNS	Central Nervous System
CQP	Construction Quality Plan
CSP	Certified Safety Professional
CTO	Contract Task Order
DR	Demolition Range
DRI	Direct Reading Instruments
DPT	Direct Push Technology
eV	electron Volts
FID	Flame Ionization Detector
FOL	Field Operations Leader
HSGM	Health and Safety Guidance Manual
HASP	Health and Safety Plan
HAZWOPER	Hazardous Waste Operations and Emergency Response
HEPA	High Efficiency Particulate Air
HSA	Hollow Stem Auger
HSM	Health and Safety Manager
HMX	Cyclotetramethylene tetranitramine Octagen,
IDLH	Immediately Dangerous to Life and Health
IDW	Investigative Derived Waste
NAD	Naval Ammunition Depot
N/A	Not Available
NIOSH	National Institute Occupational Safety and Health
NSWC	Naval Surface Warfare Center
OB/OD	Open Burning/Open Detonation
OSHA	Occupational Safety and Health Administration (U.S. Department of Labor)
PCB	Polychlorinated Biphenyl

PEL	Permissible Exposure Limit
PHSO	Project Health and Safety Manager
PID	Photo Ionization Detector
PM	Project Manager
PPE	Personal Protective Equipment
PPM	Parts Per Million
PVC	Poly Vinyl Chloride
RCRA	Resource Conservation and Recovery Act
RDX	Cyclo-1,3,5-trimethylene-2,4,6-trinitramine
SAP	Sampling and Analyses Plan
SCBA	Self Contained Breathing Apparatus
SSO	Site Safety Officer
STEL	Short Term Exposure Limit
SVOC	Semi Volatile Organic Compound
SWL	Sanitary Waste Landfill
SWMU	Solid Waste Management Unit
TBD	To Be Determined
TCE	Trichloroethylene
TNT	Trinitrotoluene
TOM	Task Order Manager
TWA	Time Weighted Average
UV	Ultra Violet
VOC	Volatile Organic Compound
WP	Work Plan

ATTACHMENT I

**INJURY/ILLNESS PROCEDURE
AND REPORT FORM**

TETRA TECH NUS, INC.

INJURY/ILLNESS PROCEDURE WORKER'S COMPENSATION PROGRAM

WHAT YOU SHOULD DO IF YOU ARE INJURED OR DEVELOP AN ILLNESS AS A RESULT OF YOUR EMPLOYMENT:

- Stop work as needed to ensure no further harm is done.
- If injury is minor, obtain appropriate first aid treatment.
- If injury or illness is severe or life threatening, obtain professional medical treatment at the nearest hospital emergency room. Check with your office location or project health and safety plan for specific instructions.
- If incident involves an injury, illness, or chemical exposure on a project work site, follow instructions in the Health & Safety Plan.
- Immediately report any injury or illness to your supervisor or office manager. In addition, you must contact your Human Resources representative, Marilyn Duffy at (412) 921-8475, and the Corporate Health and Safety Manager, Matt Soltis at (412) 921-8912 within 24 hours of the injury. You will be required to complete an Injury/Illness Report. You may also be required to participate in a more detailed investigation with the Health Sciences Department.
- In the event of a serious near-miss incident, a "Serious Near Miss Report" (Form AR-2, available online at <https://go2.tetrattech.com> under "Departments", "Health and Safety", "Accident Reporting Procedures", hyperlink for "Serious Near Miss Report") must be completed and faxed to the Corporate Health and Safety Manager within 48 hours.
- If further medical treatment is needed, our insurance carrier, ACE, will provide information on the authorized providers customized to the location of the injured employee. You can find this information by accessing the website of ACE's claims handler, ESIS, at : www.esis.com. These providers are to be used for treatment of Worker's Compensation injuries subject to the laws of the state in which you work.

ADDITIONAL QUESTIONS REGARDING WORKER'S COMPENSATION:

Contact your local Human Resources representative (Marilyn Duffy), Corporate Health and Safety Manager (Matt Soltis), or Corporate Administration in Pasadena, California, at (626) 351-4664.

Worker's compensation is a state-mandated program that provides medical and disability benefits to employees who become disabled due to job related injury or illness. Tetra Tech, Inc. and its subsidiaries pay premiums on behalf of their employees. This program is based on a no-fault system, and benefits are provided for covered events as an exclusive remedy to the injured employee regardless of fault. The types of injuries or illnesses covered and the amount of

benefits paid are regulated by the state worker's compensation boards and vary from state to state. Corporate Administration in Pasadena is responsible for administering the Company's worker's compensation program. The following is a general explanation of worker's compensation provided in the event that you become injured or develop an illness as a result of your employment with Tetra Tech or any of its subsidiaries. Please be aware that the term used for worker's compensation varies from state to state.

WHO IS COVERED:

All employees of Tetra Tech, whether they are on a full-time, part-time or temporary status, working in an office or in the field, are entitled to worker's compensation benefits from the first day of work. All employees must follow the above injury/illness reporting procedures. If you are working out-of-state and away from your home office, you are still eligible for worker's compensation benefits.

Consultants, independent contractors, and employees of subcontractors and employees from temporary employment agencies are not covered by Tetra Tech's Worker's Compensation plan.

WHAT IS COVERED:

If you are injured or develop an illness caused by your employment, worker's compensation benefits are available to you subject to the laws of the state you work in. Injuries do not have to be serious; even injuries treated by first aid practices are covered and must be reported.



TETRA TECH, INC.

ACCIDENT AND ILLNESS INVESTIGATION REPORT

To: _____
Subsidiary Health and Safety Representative

Prepared by: _____

cc: _____
Workers Compensation Administrator

Position: _____

Project name: _____

Office: _____

Project number: _____

Telephone number: _____

Fax number: _____

Information Regarding Injured or Ill Employee

Name: _____

Office: _____

Home address: _____

Gender: M F No. of dependents: _____

Marital status: _____

Home telephone number: _____

Date of birth: _____

Occupation (regular job title): _____

Social security number: _____

Department: _____

Date of Accident: _____

Time of Accident: _____ a.m. p.m.

Time Employee Began Work: _____

Check if time cannot be determined

Location of Incident

Street address: _____

City, state, and zip code: _____

County: _____

Was place of accident or exposure on employer's premises? Yes No

Information About the Incident

What was the employee doing just before the incident occurred? Describe the activity as well as the tools, equipment, or material the employee was using. Be specific. Examples: "Climbing a ladder while carrying roofing materials"; "Spraying chlorine from hand sprayer"; "Daily computer key-entry"

What Happened? Describe how the injury occurred. Examples: "When ladder slipped on wet floor, worker fell 20 feet"; "Worker was sprayed with chlorine when gasket broke during replacement"; "Worker developed soreness in wrist over time"

This form contains information relating to employee health and must be used in a manner that protects the confidentiality of the employee to the extent possible while the information is being used for occupational safety and health purposes.



TETRA TECH, INC.

ACCIDENT AND ILLNESS INVESTIGATION REPORT (Continued)

Information About the Incident (Continued)

What was the injury or illness? Describe the part(s) of the body affected and how it was affected. Be more specific than "hurt," "pain," or "sore." Examples "Strained back"; "Chemical burn, right hand"; "Carpal tunnel syndrome, left wrist"

Describe the Object or Substance that Directly Harmed the Employee: Examples: "Concrete floor"; "Chlorine"; "Radial arm saw." If this question does not apply to the incident, write "Not applicable."

Did the employee die? Yes [] No [] Date of death: _____

Was employee performing regular job duties? Yes [] No []

Was safety equipment provided? Yes [] No [] Was safety equipment used? Yes [] No []

Note: Attach any police reports or related diagrams to this report.

Witness (Attach additional sheets for other witnesses.)

Name: _____

Company: _____

Street address: _____

City: _____ State: _____ Zip code: _____

Telephone number: _____

Medical Treatment Required? [] Yes [] No [] First aid only

Name of physician or health care professional: _____

If treatment was provided away from the work site, provide the information below.

Facility name: _____

Street address: _____

City: _____ State: _____ Zip code: _____

Telephone number: _____

Was the employee treated in an emergency room? [] Yes [] No

Was the employee hospitalized over night as an in-patient? [] Yes [] No

This form contains information relating to employee health and must be used in a manner that protects the confidentiality of the employee to the extent possible while the information is being used for occupational safety and health purposes.



TETRA TECH, INC.

ACCIDENT AND ILLNESS INVESTIGATION REPORT (Continued)

Corrective Action(s) Taken by Unit Reporting the Accident:

Corrective Action Still to be Taken (by whom and when):

Name of Tetra Tech employee the injury or illness was first reported to: _____

Date of Report: _____ Time of Report: _____

I have reviewed this investigation report and agree, to the best of my recollection, with its contents.

Printed Name of Injured Employee _____

Telephone Number _____

Signature of Injured Employee _____

Date _____

The signatures provided below indicate that appropriate personnel have been notified of the incident.

Title	Printed Name	Signature	Telephone Number	Date
Office Manager				
Project Manager				
Site Safety Coordinator or Office Health and Safety Representative				

This form contains information relating to employee health and must be used in a manner that protects the confidentiality of the employee to the extent possible while the information is being used for occupational safety and health purposes.



TETRA TECH, INC.

ACCIDENT AND ILLNESS INVESTIGATION REPORT (Continued)

To Be Completed by the Subsidiary Health and Safety Representative

Classification of Incident:

Injury Illness

Result of Incident:

First aid only

Days away from work

Remained at work but incident resulted in job transfer or work restriction

Incident involved days away and job transfer or work restriction

Medical treatment only

No. of days away from work _____

Date employee left work _____

Date employee returned to work _____

No. of days placed on restriction or job transfer: _____

OSHA Recordable Case Number _____

To Be Completed by Human Resources

Social security number: _____

Date of hire: _____ Hire date for current job: _____

Wage information: \$ _____ per Hour Day Week Month

Position at time of hire: _____

Current position: _____ Shift hours: _____

State in which employee was hired: _____

Status: Full-time Part-time Hours per week: _____ Days per week: _____

Temporary job end date: _____

To Be Completed during Report to Workers Compensation Carrier

Date reported: _____ Reported by: _____

Confirmation number: _____

Name of contact: _____

Field office of claims adjuster: _____

This form contains information relating to employee health and must be used in a manner that protects the confidentiality of the employee to the extent possible while the information is being used for occupational safety and health purposes.

**ATTACHMENT II
MEDICAL DATA SHEET**

MEDICAL DATA SHEET

This Medical Data Sheet must be completed by all on-site personnel and kept in the command post during the conduct of site operations. This data sheet will accompany any personnel when medical assistance is needed or if transport to hospital facilities is required.

Project _____

Name _____ Home Telephone _____

Address _____

Age _____ Height _____ Weight _____

Name of Next Kin _____

Drug or other Allergies _____

Particular Sensitivities _____

Do You Wear Contacts? _____

Provide a Checklist of Previous Illnesses or Exposure to Hazardous Chemicals _____

What medications are you presently using? _____

Do you have any medical restrictions? _____

Name, Address, and Phone Number of personal physician: _____


I am the individual described above. I have read and understand this HASP.

Signature

Date

ATTACHMENT III

**UTILITY LOCATING
AND
EXCAVATION CLEARANCE**



TETRA TECH NUS, INC.

STANDARD OPERATING PROCEDURES

Number	HS-1.0	Page	1 of 15
Effective Date	12/03	Revision	2
Applicability	Tetra Tech NUS, Inc.		
Prepared	Health & Safety		
Approved	D. Senovich		

Subject
UTILITY LOCATING AND EXCAVATION CLEARANCE

TABLE OF CONTENTS

<u>SECTION</u>	<u>PAGE</u>
1.0 PURPOSE	2
2.0 SCOPE	2
3.0 GLOSSARY	2
4.0 RESPONSIBILITIES	3
5.0 PROCEDURES	3
5.1 BURIED UTILITIES	3
5.2 OVERHEAD POWER LINES	5
6.0 UNDERGROUND LOCATING TECHNIQUES	5
6.1 GEOPHYSICAL METHODS	5
6.2 PASSIVE DETECTION SURVEYS	6
6.3 INTRUSIVE DETECTION SURVEYS	6
7.0 INTRUSIVE ACTIVITIES SUMMARY	7
8.0 REFERENCES	8

ATTACHMENTS

1 Listing of Underground Utility Clearance Resources	9
2 Frost Line Penetration Depths by Geographic Location	11
3 Utility Clearance Form	12
4 OSHA Letter of Interpretation	13

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 2 of 15
	Revision 2	Effective Date 12/03

1.0 PURPOSE

Utilities such as electric service lines, natural or propane gas lines, water and sewage lines, telecommunications, and steam lines are very often in the immediate vicinity of work locations. Contact with underground or overhead utilities can have serious consequences including employee injury/fatality, property and equipment damage, substantial financial impacts, and loss of utility service to users.

The purpose of this procedure is to provide minimum requirements and technical guidelines regarding the appropriate procedures to be followed when performing subsurface and overhead utility locating services. It is the policy of Tetra Tech NUS, Inc. (TiNUS) to provide a safe and healthful work environment for the protection of our employees. The purpose of this Standard Operating Procedure (SOP) is to aid in achieving the objectives of this policy, to present the acceptable procedures pertaining to utility locating and excavation clearance activities, and to present requirements and restrictions relevant to these types of activities. This SOP must be reviewed by any employee potentially involved with underground or overhead utility locating and avoidance activities.

2.0 SCOPE

This procedure applies to all TiNUS field activities where there may be potential contact with underground or overhead utilities. This procedure provides a description of the principles of operation, instrumentation, applicability, and implementability of typical methods used to determine the presence and avoidance of contact with utility services. This procedure is intended to assist with work planning and scheduling, resource planning, field implementation, and subcontractor procurement. Utility locating and excavation clearance requires site-specific information prior to the initiation of any such activities on a specific project. This SOP is not intended to provide a detailed description of methodology and instrument operation. Specialized expertise during both planning and execution of several of the methods presented may also be required.

3.0 GLOSSARY

Electromagnetic Induction (EMI) Survey - A geophysical exploration method whereby electromagnetic fields are induced in the ground and the resultant secondary electromagnetic fields are detected as a measure of ground conductivity.

Magnetometer - A device used for precise and sensitive measurements of magnetic fields.

Magnetic Survey - A geophysical survey method that depends on detection of magnetic anomalies caused by the presence of buried ferromagnetic objects.

Metal Detection - A geophysical survey method that is based on electromagnetic coupling caused by underground conductive objects.

Vertical Gradiometer - A magnetometer equipped with two sensors that are vertically separated by a fixed distance. It is best suited to map near surface features and is less susceptible to deep geologic features.

Ground Penetrating Radar - Ground Penetrating Radar (GPR) involves specialized radar equipment whereby a signal is sent into the ground via a transmitter. Some portion of the signal will be reflected from the subsurface material, which is then recorded with a receiver and electronically converted into a graphic picture.

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 3 of 15
	Revision 2	Effective Date 12/03

4.0 RESPONSIBILITIES

Project Manager (PM)/Task Order Manager (TOM) - Responsible for ensuring that all field activities are conducted in accordance with this procedure.

Site Manager (SM)/Field Operations Leader (FOL) - Responsible for the onsite verification that all field activities are performed in compliance with approved SOPs or as otherwise directed by the approved project plan(s).

Site Health & Safety Officer (SHSO) - Responsible to provide technical assistance and verify full compliance with this SOP. The SHSO is also responsible for reporting any deficiencies to the Corporate Health and Safety Manager (HSM) and to the PM/TOM.

Health & Safety Manager (HSM) - Responsible for preparing, implementing, and modifying corporate health and safety policy and this SOP.

Site Personnel - Responsible for performing their work activities in accordance with this SOP and the TtNUS Health and Safety Policy.

5.0 PROCEDURES

This procedure addresses the requirements and technical procedures that must be performed to minimize the potential for contact with underground and overhead utility services. These procedures are addressed individually from a buried and overhead standpoint.

5.1 Buried Utilities

Buried utilities present a heightened concern because their location is not typically obvious by visual observation, and it is common that their presence and/or location is unknown or incorrectly known on client properties. This procedure must be followed prior to beginning any subsurface probing or excavation that might potentially be in the vicinity of underground utility services. In addition, the Utility Clearance Form (Attachment 3) must be completed for every location or cluster of locations where intrusive activities will occur.

Where the positive identification and de-energizing of underground utilities cannot be obtained and confirmed using the following steps, the PM/TOM is responsible for arranging for the procurement of a qualified, experienced, utility locating subcontractor who will accomplish the utility location and demarcation duties specified herein.

1. A comprehensive review must be made of any available property maps, blue lines, or as-builts prior to site activities. Interviews with local personnel familiar with the area should be performed to provide additional information concerning the location of potential underground utilities. Information regarding utility locations shall be added to project maps upon completion of this exercise.
2. A visual site inspection must be performed to compare the site plan information to actual field conditions. Any findings must be documented and the site plan/maps revised. The area(s) of proposed excavation or other subsurface activities must be marked at the site in white paint or pin flags to identify those locations of the proposed intrusive activities. The site inspection should focus on locating surface indications of potential underground utilities. Items of interest include the presence of nearby area lights, telephone service, drainage grates, fire hydrants, electrical service vaults/panels, asphalt/concrete scars and patches, and topographical depressions. Note the location of any emergency shut off switches. Any additional information regarding utility

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 4 of 15
	Revision 2	Effective Date 12/03

locations shall be added to project maps upon completion of this exercise and returned to the PM/TOM.

3. If the planned work is to be conducted on private property (e.g., military installations, manufacturing facilities, etc.) the FOL must identify and contact appropriate facility personnel (e.g., public works or facility engineering) before any intrusive work begins to inquire about (and comply with) property owner requirements. It is important to note that private property owners may require several days to several weeks advance notice prior to locating utilities.
4. If the work location is on public property, the state agency that performs utility clearances must be notified (see Attachment 1). State "one-call" services must be notified prior to commencing fieldwork per their requirements. Most one-call services require, by law, 48- to 72-hour advance notice prior to beginning any excavation. Such services typically assign a "ticket" number to the particular site. This ticket number must be recorded for future reference and is valid for a specific period of time, but may be extended by contacting the service again. The utility service will notify utility representatives who then mark their respective lines within the specified time frame. It should be noted that most military installations own their own utilities but may lease service and maintenance from area providers. Given this situation, "one call" systems may still be required to provide location services on military installations.
5. Utilities must be identified and their locations plainly marked using pin flags, spray paint, or other accepted means. The location of all utilities must be noted on a field sketch for future inclusion on project maps. Utility locations are to be identified using the following industry-standard color code scheme, unless the property owner or utility locator service uses a different color code:

white	excavation/subsurface investigation location
red	electrical
yellow	gas, oil, steam
orange	telephone, communications
blue	water, irrigation, slurry
green	sewer, drain
6. Where utility locations are not confirmed with a high degree of confidence through drawings, schematics, location services, etc., the work area must be thoroughly investigated prior to beginning the excavation. In these situations, utilities must be identified using safe and effective methods such as passive and intrusive surveys, or the use of non-conductive hand tools. Also, in situations where such hand tools are used, they should always be used in conjunction with suitable detection equipment, such as the items described in Section 6.0 of this SOP. Each method has advantages and disadvantages including complexity, applicability, and price. It also should be noted that in some states, initial excavation is required by hand to a specified depth.
7. At each location where trenching or excavating will occur using a backhoe or other heavy equipment, and where utility identifications and locations cannot be confirmed prior to groundbreaking, the soil must be probed using a device such as a tile probe which is made of non-conductive material such as fiberglass. If these efforts are not successful in clearing the excavation area of suspect utilities, hand shoveling must be performed for the perimeter of the intended excavation.
8. All utilities uncovered or undermined during excavation must be structurally supported to prevent potential damage. Unless necessary as an emergency corrective measure, TtNUS shall not make any repairs or modifications to existing utility lines without prior permission of the utility owner, property owner, and Corporate HSM. All repairs require that the line be locked-out/tagged-out prior to work.

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 5 of 15
	Revision 2	Effective Date 12/03

5.2 Overhead Power Lines

If it is necessary to work within the minimum clearance distance of an overhead power line, the overhead line must be de-energized and grounded, or re-routed by the utility company or a registered electrician. If protective measures such as guarding, isolating, or insulating are provided, these precautions must be adequate to prevent employees from contacting such lines directly with any part of their body or indirectly through conductive materials, tools, or equipment.

The following table provides the required minimum clearances for working in proximity to overhead power lines.

<u>Nominal Voltage</u>	<u>Minimum Clearance</u>
0 -50 kV	10 feet, or one mast length; whichever is greater
50+ kV	10 feet plus 4 inches for every 10 kV over 50 kV or 1.5 mast lengths; whichever is greater

6.0 UNDERGROUND LOCATING TECHNIQUES

A variety of supplemental utility locating approaches are available and can be applied when additional assurance is needed. The selection of the appropriate method(s) to employ is site-specific and should be tailored to the anticipated conditions, site and project constraints, and personnel capabilities.

6.1 Geophysical Methods

Geophysical methods include electromagnetic induction, magnetics, and ground penetrating radar. Additional details concerning the design and implementation of electromagnetic induction, magnetics, and ground penetrating radar surveys can be found in one or more of the TINUS SOPs included in the References (Section 8.0).

Electromagnetic Induction

Electromagnetic Induction (EMI) line locators operate either by locating a background signal or by locating a signal introduced into the utility line using a transmitter. A utility line acts like a radio antenna, producing electrons, which can be picked up with a radiofrequency receiver. Electrical current carrying conductors have a 60HZ signal associated with them. This signal occurs in all power lines regardless of voltage. Utilities in close proximity to power lines or used as grounds may also have a 60HZ signal, which can be picked up with an EM receiver. A typical example of this type of geophysical equipment is an EM-61.

EMI locators specifically designed for utility locating use a special signal that is either indirectly induced onto a utility line by placing the transmitter above the line or directly induced using an induction clamp. The clamp induces a signal on the specific utility and is the preferred method of tracing since there is little chance of the resulting signals being interfered with. A good example of this type of equipment is the Schonstedt® MAC-51B locator. The MAC-51B performs inductively traced surveys, simple magnetic locating, and traced nonmetallic surveys.

When access can be gained inside a conduit to be traced, a flexible insulated trace wire can be used. This is very useful for non-metallic conduits but is limited by the availability of gaining access inside the pipe.

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 6 of 15
	Revision 2	Effective Date 12/03

Magnetics

Magnetic locators operate by detecting the relative amounts of buried ferrous metal. They are incapable of locating or identifying nonferrous utility lines but can be very useful for locating underground storage tanks (UST's), steel utility lines, and buried electrical lines. A typical example of this type of equipment is the Schonstedt® GA-52Cx locator. The GA-52Cx is capable of locating 4-inch steel pipe up to 8 feet deep.

Non-ferrous lines are often located by using a typical plumbing tool (snake) fed through the line. A signal is then introduced to the snake that is then traced.

Ground Penetrating Radar

Ground Penetrating Radar (GPR) involves specialized radar equipment whereby a signal is sent into the ground via a transmitter. Some portion of the signal will be reflected from the subsurface material, which is then recorded with a receiver and electronically converted into a graphic picture. In general, an object which is harder than the surrounding soil will reflect a stronger signal. Utilities, tunnels, UST's, and footings will reflect a stronger signal than the surrounding soil. Although this surface detection method may determine the location of a utility, this method does not specifically identify utilities (i.e., water vs. gas, electrical vs. telephone); hence, verification may be necessary using other methods. This method is somewhat limited when used in areas with clay soil types or with a high water table.

6.2 Passive Detection Surveys

Acoustic Surveys

Acoustic location methods are generally most applicable to waterlines or gas lines. A highly sensitive Acoustic Receiver listens for background sounds of water flowing (at joints, leaks, etc.) or to sounds introduced into the water main using a transducer. Acoustics may also be applicable to determine the location of plastic gas lines.

Thermal Imaging

Thermal (i.e., infrared) imaging is a passive method for detecting the heat emitted by an object. Electronics in the infrared camera convert subtle heat differentials into a visual image on the viewfinder or a monitor. The operator does not look for an exact temperature; rather they look for heat anomalies (either elevated or suppressed temperatures) characteristic of a potential utility line.

The thermal fingerprint of underground utilities results from differences in temperature between the atmosphere and the fluid present in a pipe or the heat generated by electrical resistance. In addition, infrared scanners may be capable of detecting differences in the compaction, temperature and moisture content of underground utility trenches. High-performance thermal imagery can detect temperature differences to hundredths of a degree.

6.3 Intrusive Detection Surveys

Vacuum Excavation

Vacuum excavation is used to physically expose utility services. The process involves removing the surface material over approximately a 1' x 1' area at the site location. The air-vacuum process proceeds with the simultaneous action of compressed air-jets to loosen soil and vacuum extraction of the resulting

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 7 of 15
	Revision / 2	Effective Date 12/03

debris. This process ensures the integrity of the utility line during the excavation process, as no hammers, blades, or heavy mechanical equipment comes into contact with the utility line, eliminating the risk of damage to utilities. The process continues until the utility is uncovered. Vacuum excavation can be used at the proposed site location to excavate below the "utility window" which is usually 8 feet.

Hand Excavation

When the identification and location of underground utilities cannot be positively confirmed through document reviews and/or other methods, borings and excavations may be cleared via the use of non-conductive hand tools. This should always be done in conjunction with the use of detection equipment. This would be required for all locations where there is a potential to impact buried utilities. The minimum hand-excavation depth that must be reached is to be determined considering the geographical location of the work site. This approach recognizes that the placement of buried utilities is influenced by frost line depths that vary by geographical region. Attachment 2 presents frost line depths for the regions of the contiguous United States. At a minimum, hand excavation depths must be at least to the frost line depth (see Attachment 2) plus two (2) feet, but never less than 4 feet below ground surface (bgs). For hand excavation, the hole created must be reamed large enough to be at least the diameter of the drill rig auger or bit prior to drilling. For soil gas surveys, the survey probe shall be placed as close as possible to the cleared hand excavation. It is important to note that a post-hole digger must not be used in this type of hand excavation activity.

Tile Probe Surveys

For some soil types, site conditions, and excavation requirements, non-conductive tile probes may be used. A tile probe is a "T"-handled rod of varying lengths that can be pushed into the soil to determine if any obstructions exist at that location. Tile probes constructed of fiberglass or other nonconductive material are readily-available from numerous vendors. Tile probes must be performed to the same depth requirements as previously specified. As with other types of hand excavating activities, the use of a non-conductive tile probe, should always be in conjunction with suitable utility locating detection equipment.

7.0 INTRUSIVE ACTIVITIES SUMMARY

The following list summarizes the activities that must be performed prior to beginning subsurface activities:

1. Map and mark all subsurface locations and excavation boundaries using white paint or markers specified by the client or property owner.
2. Notify the property owner and/or client that the locations are marked. At this point, drawings of locations or excavation boundaries shall be provided to the property owner and/or client so they may initiate (if applicable) utility clearance.

Note: Drawings with confirmed locations should be provided to the property owner and/or client as soon as possible to reduce potential time delays.

3. Notify "One Call" service. If possible, arrange for an appointment to show the One Call representative the surface locations or excavation boundaries in person. This will provide a better location designation to the utilities they represent. You should have additional drawings should you need to provide plot plans to the One Call service.
4. Implement supplemental utility detection techniques as necessary and appropriate to conform utility locations or the absence thereof.

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 8 of 15
	Revision 2	Effective Date 12/03

5. Complete Attachment 3, Utility Clearance Form. This form should be completed for each excavation location. In situations where multiple subsurface locations exist within the close proximity of one another, one form may be used for multiple locations provided those locations are noted on the Utility Clearance Form. Upon completion, the Utility Clearance Form and revised/annotated utility location map becomes part of the project file.

8.0 REFERENCES

OSHA Letter of Interpretation, Mr. Joseph Caldwell, Attachment 4
 OSHA 29 CFR 1926(b)(2)
 OSHA 29 CFR 1926(b)(3)
 TtNUS Utility Locating and Clearance Policy
 TtNUS SOP GH-3.1; Resistivity and Electromagnetic Induction
 TtNUS SOP GH-3.2; Magnetic and Metal Detection Surveys
 TtNUS SOP GH-3.4; Ground-penetrating Radar Surveys

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 9 of 15
	Revision 2	Effective Date 12/03

**ATTACHMENT 1
LISTING OF UNDERGROUND UTILITY CLEARANCE RESOURCES**



American Public Works Association
2345 Grand Boulevard, Suite 500, Kansas City, MO 64108-2625
Phone (816) 472-6100 • Fax (816) 472-1610
Web www.apwa.net • E-mail apwa@apwa.net

**ONE-CALL SYSTEMS INTERNATIONAL
CONDENSED DIRECTORY**

- | | | |
|--|---|---|
| <p>Alabama
Alabama One-Call
1-800-292-8525</p> <p>Alaska
Locate Call Center of Alaska, Inc.
1-800-478-3121</p> <p>Arizona
Arizona Blue Stake
1-800-782-5348</p> <p>Arkansas
Arkansas One Call System, Inc.
1-800-482-8998</p> <p>California
Underground Service Alert North
1-800-227-2600
Underground Service Alert of Southern
California
1-800-227-2600</p> <p>Colorado
Utility Notification Center of Colorado
1-800-922-1987</p> <p>Connecticut
Call Before You Dig
1-800-922-4455</p> <p>Delaware
Miss Utility of Delmarva
1-800-282-8555</p> <p>Florida
Sunshine State One-Call of Florida, Inc.
1-800-432-4770</p> <p>Georgia
Underground Protection Center, Inc.
1-800-282-7411</p> <p>Hawaii
Underground Service Alert North
1-800-227-2600</p> <p>Idaho
Dig Line Inc.
1-800-342-1585
Kootenai County One-Call
1-800-428-4950
Shoshone - Benewah One-Call
1-800-398-3285</p> <p>Illinois
JULIE, Inc.
1-800-892-0123
Digger (Chicago Utility Alert Network)
312-744-7000</p> <p>Indiana
Indiana Underground Plant Protection
Service
1-800-382-5544</p> | <p>Iowa
Iowa One-Call
1-800-292-8989</p> <p>Kansas
Kansas One-Call System, Inc.
1-800-344-7233</p> <p>Kentucky
Kentucky Underground Protection Inc.
1-800-752-6007</p> <p>Louisiana
Louisiana One Call System, Inc.
1-800-272-3020</p> <p>Maine
Dig Safe System, Inc.
1-888-344-7233</p> <p>Maryland
Miss Utility
1-800-257-7777
Miss Utility of Delmarva
1-800-282-8555</p> <p>Massachusetts
Dig Safe System, Inc.
1-888-344-7233</p> <p>Michigan
Miss Dig System, Inc.
1-800-482-7171</p> <p>Minnesota
Gopher State One Call
1-800-252-1188</p> <p>Mississippi
Mississippi One-Call System, Inc.
1-800-227-8477</p> <p>Missouri
Missouri One-Call System, Inc.
1-800-344-7483</p> <p>Montana
Utilities Underground Protection Center
1-800-424-5555
Montana One Call Center
1-800-551-8344</p> <p>Nebraska
Diggers Hotline of Nebraska
1-800-331-5668</p> <p>Nevada
Underground Service Alert North
1-800-227-2600</p> <p>New Hampshire
Dig Safe System, Inc.
1-888-344-7233</p> | <p>New Jersey
New Jersey One Call
1-800-272-1000</p> <p>New Mexico
New Mexico One Call System, Inc.
1-800-321-2537
Las Cruces- Dona Ana Blue Stakes
1-888-528-0400</p> <p>New York
Dig Safety New York
1-800-882-7962
New York City- Long Island One Call
Center
1-800-272-4480</p> <p>North Carolina
The North Carolina One-Call Center,
Inc.
1-800-632-4949</p> <p>North Dakota
North Dakota One-Call
1-800-795-0555</p> <p>Ohio
Ohio Utilities Protection Service
1-800-362-2764
Oil & Gas Producers Underground
Protect'n Svc
1-800-925-0988</p> <p>Oklahoma
Call Okie
1-800-522-6543</p> <p>Oregon
Oregon Utility Notification Center/One
Call Concepts
1-800-332-2344</p> <p>Pennsylvania
Pennsylvania One Call System, Inc.
1-800-242-1776</p> <p>Rhode Island
Dig Safe System, Inc.
1-888-344-7233</p> <p>South Carolina
Palmetto Utility Protection Service, Inc.
1-888-721-7877</p> <p>South Dakota
South Dakota One Call
1-800-781-7474</p> <p>Tennessee
Tennessee One-Call System, Inc.
1-800-351-1111</p> |
|--|---|---|

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 10 of 15
	Revision 2	Effective Date 12/03

ATTACHMENT 1 (Continued)

Texas

Texas One Call System
1-800-245-4545
Texas Excavation Safety System, Inc.
1-800-344-8377
Lone Star Notification Center
1-800-669-8344

Utah

Blue Stakes of Utah
1-800-662-4111

Vermont

Dig Safe System, Inc.
1-888-344-7233

Virginia

Miss Utility of Virginia
1-800-552-7001
Miss Utility (Northern Virginia)
1-800-257-7777

Washington

Utilities Underground Location Center
1-800-424-5555
Northwest Utility Notification Center
1-800-553-4344
Inland Empire Utility Coordinating
Council
509-456-8000

West Virginia

Miss Utility of West Virginia, Inc.
1-800-245-4848

Wisconsin

Diggers Hotline, Inc.
1-800-242-8511

Wyoming

Wyoming One-Call System, Inc.
1-800-348-1030
Call Before You Dig of Wyoming
1-800-849-2476

District of Columbia

Miss Utility
1-800-257-7777

Alberta

Alberta One-Call Corporation
1-800-242-3447

British Columbia

BC One Call
1-800-474-6888

Ontario


Ontario One-Call System
1-800-400-2255

Quebec

Info-Excavation
1-800-663-9228

ATTACHMENT 2

FROST LINE PENETRATION DEPTHS BY GEOGRAPHIC LOCATION

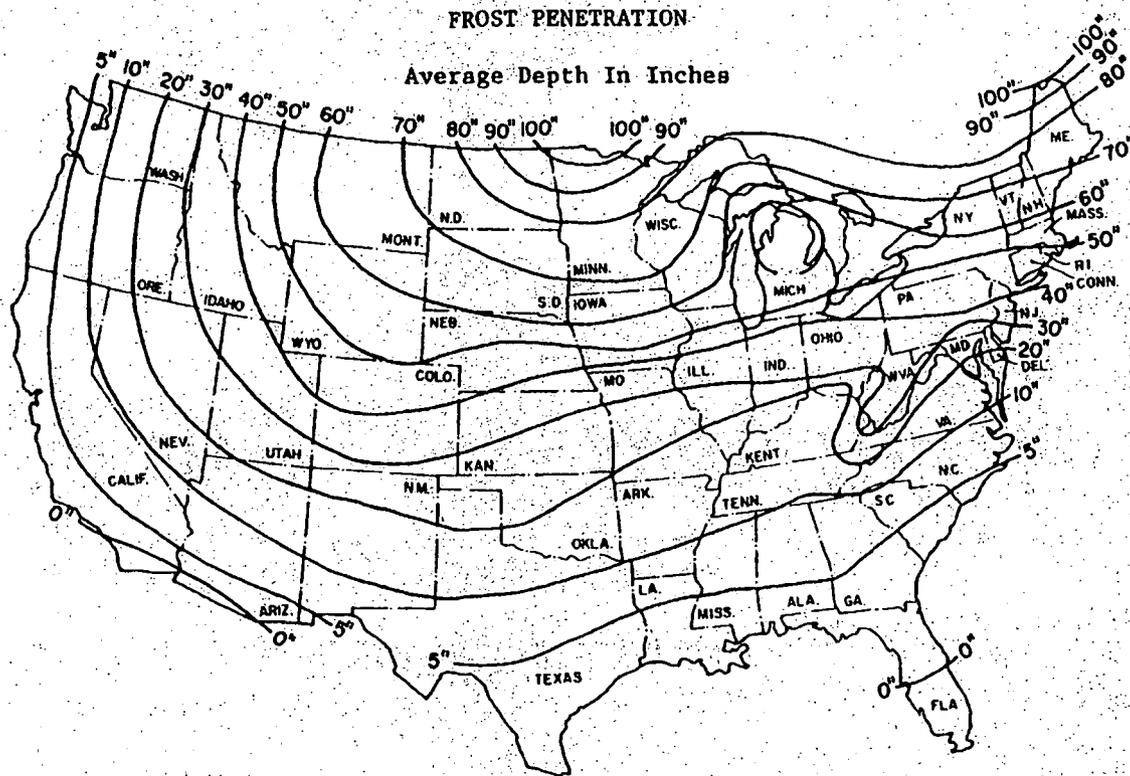

Courtesy U.S. Department Of Commerce

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 12 of 15
	Revision 2	Effective Date 12/03

**ATTACHMENT 3
UTILITY CLEARANCE FORM**

Client: _____ Project Name: _____

Project No.: _____ Completed By: _____

Location Name: _____ Work Date: _____

Excavation Method/Overhead Equipment: _____

1. **Underground Utilities** Circle One

a) Review of existing maps? yes no N/A

b) Interview local personnel? yes no N/A

c) Site visit and inspection? yes no N/A

d) Excavation areas marked in the field? yes no N/A

e) Utilities located in the field? yes no N/A

f) Located utilities marked/added to site maps? yes no N/A

g) Client contact notified? yes no N/A

Name _____ Telephone: _____ Date: _____

g) State One-Call agency called? yes no N/A

Caller: _____

Ticket Number: _____ Date: _____

h) Geophysical survey performed? yes no N/A

Survey performed by: _____

Method: _____ Date: _____

i) Hand excavation performed (with concurrent use of utility
detection device)? yes no N/A

Completed by: _____

Total depth: _____ feet Date: _____

j) Trench/excavation probed? yes no N/A

Probing completed by: _____

Depth/frequency: _____ Date: _____

2. **Overhead Utilities** Present Absent

a) Determination of nominal voltage yes no N/A

b) Marked on site maps yes no N/A

c) Necessary to lockout/insulate/re-route yes no N/A

d) Document procedures used to lockout/insulate/re-route yes no N/A

e) Minimum acceptable clearance (SOP Section 5.2): _____

3. **Notes:**

Approval:

Site Manager/Field Operations Leader

Date

c: PM/Project File
Program File

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 13 of 15
	Revision 2	Effective Date 12/03

**ATTACHMENT 4
OSHA LETTER OF INTERPRETATION**

Mr. Joseph Caldwell
Consultant
Governmental Liaison
Pipeline Safety Regulations
211 Wilson Boulevard
Suite 700
Arlington, Virginia 22201

Re: Use of hydro-vacuum or non-conductive hand tools to locate underground utilities.

Dear Mr. Caldwell:

In a letter dated July 7, 2003, we responded to your inquiry of September 18, 2002, regarding the use of hydro-vacuum equipment to locate underground utilities by excavation. After our letter to you was posted on the OSHA website, we received numerous inquiries that make it apparent that aspects of our July 7 letter are being misunderstood. In addition, a number of industry stakeholders, including the National Utility Contractors Association (NUCA), have provided new information regarding equipment that is available for this work.

To clarify these issues, we are withdrawing our July 7 letter and issuing this replacement response to your inquiry.

Question: Section 1926.651 contains several requirements that relate to the safety of employees engaged in excavation work. Specifically, paragraphs (b)(2) and (b)(3) relate in part to the safety of the means used to locate underground utility installations that, if damaged during an uncovering operation, could pose serious hazards to employees.

Under these provisions, what constitutes an acceptable method of uncovering underground utility lines, and further, would the use of hydro-vacuum excavation be acceptable under the standard?

Answer

Background

Two sections of 29 CFR 1926 Subpart P (Excavations), 1926.651 (Specific excavation requirements), govern methods for uncovering underground utility installations. Specifically, paragraph (b)(2) states:

When utility companies or owners cannot respond to a request to locate underground utility installations within 24 hours * * * or cannot establish the exact location of these installations, the employer may proceed, provided the employer does so with caution, and provided detection equipment or other acceptable means to locate utility installations are used. (emphasis added)

Paragraph (b)(3) provides:

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 14 of 15
	Revision 2	Effective Date 12/03

ATTACHMENT 4 (Continued)

When excavation operations approach the estimated location of underground installations, the exact location of the installations shall be determined by safe and acceptable means (emphasis added).

Therefore, "acceptable means" must be used where the location of the underground utilities have not been identified by the utility companies and detection equipment is not used.

Subpart P does not contain a definition of either "other acceptable means" or "safe and acceptable means." The preambles to both the proposed rule and the final rule discussed the rationale behind the wording at issue. For example, the preamble to the proposed rule, 52 Fed. Reg. 12301 (April 15, 1987), noted that a 1972 version of this standard contained language that specified "careful probing or hand digging" as the means to uncover utilities. The preamble then noted that an amendment to the 1972 standard later deleted that language "to allow other, *equally effective means* of locating such installations." The preamble continued that in the 1987 proposed rule, OSHA again proposed using language in section (b)(3) that would provide another example of an acceptable method of uncovering utilities that could be used where the utilities have not been marked and detection equipment is not being used -- "probing with hand-held tools." This method was rejected in the final version of 29 CFR 1926. As OSHA explained in the preamble to the final rule, 54 Fed. Reg. 45916 (October 31, 1989):

OSHA received two comments *** and input from ACCSH [OSHA's Advisory Committee on Construction Safety and Health] *** on this provision. All commenters recommended dropping 'such as probing with hand-held tools' from the proposed provision, because this could create a hazard to employees by damaging the installation or its insulation.

In other words, the commenters objected to the use of hand tools being used unless detection equipment was used in conjunction with them. OSHA then concluded its discussion relative to this provision by agreeing with the commentators and ultimately not including any examples of "acceptable means" in the final provision.

Non-conductive hand tools are permitted

This raises the question of whether the standard permits the use of hand tools alone -- without also using detection equipment. NUCA and other industry stakeholders have recently informed us that non-conductive hand tools that are appropriate to be used to locate underground utilities are now commonly available.

Such tools, such as a "shooter" (which has a non-conductive handle and a snub nose) and non-conductive or insulated probes were not discussed in the rulemaking. Since they were not considered at that time, they were not part of the class of equipment that was thought to be unsafe for this purpose. Therefore, we conclude that the use of these types of hand tools, when used with appropriate caution, is an "acceptable means" for locating underground utilities.

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 15 of 15
	Revision 2	Effective Date 12/03

ATTACHMENT 4 (Continued)

Hydro-vacuum excavation

It is our understanding that some hydro-vacuum excavation equipment can be adjusted to use a minimum amount of water and suction pressure. When appropriately adjusted so that the equipment will not damage underground utilities (especially utilities that are particularly vulnerable to damage, such as electrical lines), use of such equipment would be considered a "acceptable means" of locating underground utilities. However, if the equipment cannot be sufficiently adjusted, then this method would not be acceptable under the standard.

Other technologies

We are not suggesting that these are the only devices that would be "acceptable means" under the standard. Industry stakeholders have informed us that there are other types of special excavation equipment designed for safely locating utilities as well.

We apologize for any confusion our July 7 letter may have caused. If you have further concerns or questions, please feel free to contact us again by fax at: U.S. Department of Labor, OSHA, Directorate of Construction, Office of Construction Standards and Compliance Assistance, fax # 202-693-1689. You can also contact us by mail at the above office, Room N3468, 200 Constitution Avenue, N.W., Washington, D.C. 20210, although there will be a delay in our receiving correspondence by mail.

Sincerely,

Russell B. Swanson, Director
Directorate of Construction

NOTE: OSHA requirements are set by statute, standards and regulations. Our interpretation letters explain these requirements and how they apply to particular circumstances, but they cannot create additional employer obligations. This letter constitutes OSHA's interpretation of the requirements discussed. Note that our enforcement guidance may be affected by changes to OSHA rules. Also, from time to time we update our guidance in response to new information. To keep apprised of such developments, you can consult OSHA's website at <http://www.osha.gov>.

ATTACHMENT IV

EQUIPMENT INSPECTION CHECKLIST

EQUIPMENT INSPECTION

COMPANY: _____ UNIT NO. _____

FREQUENCY: Inspect daily, document prior to use and as repairs are needed.

Inspection Date: ___/___/___ Time: _____ Equipment Type: _____

(e.g., bulldozer)

Good Need Repair N/A

Tires or tracks	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Hoses and belts	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Cab, mirrors, safety glass	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
- Turn signals, lights, brake lights, etc. (front/rear) for equipment approved for highway use?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
- Is the equipment equipped with audible back-up alarms and back-up lights?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Horn and gauges	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Brake condition (dynamic, park, etc.)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Fire extinguisher (Type/Rating - _____)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Fluid Levels:			
- Engine oil	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
- Transmission fluid	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
- Brake fluid	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
- Cooling system fluid	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
- Windshield wipers	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
- Hydraulic oil	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Oil leak/lube	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Coupling devices and connectors	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Exhaust system	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Blade/boom/ripper condition	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Accessways: Frame, hand holds, ladders, walkways (non-slip surfaces), guardrails?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Power cable and/or hoist cable	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Steering (standard and emergency)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Safety Guards:

Yes No

- Around rotating apparatus (belts, pulleys, sprockets, spindles, drums, flywheels, chains) all points of operations protected from accidental contact? _____
 - Hot pipes and surfaces exposed to accidental contact? _____
 - All emergency shut offs have been identified and communicated to the field crew? _____
 - Have emergency shutoffs been field tested? _____
- Results? _____

- Are any structural members bent, rusted, or otherwise show signs of damage? _____
- Are fueling cans used with this equipment approved type safety cans? _____
- Have the attachments designed for use (as per manufacturer's recommendation) with this equipment been inspected and are considered suitable for use? _____

Portable Power Tools:

- Tools and Equipment in Safe Condition? _____
- Saw blades, grinding wheels free from recognizable defects (grinding wheels have been sounded)? _____
- Portable electric tools properly grounded? _____
- Damage to electrical power cords? _____
- Blade guards in place? _____
- Components adjusted as per manufacturers recommendation? _____

Cleanliness:

- Overall condition (is the decontamination performed prior to arrival on-site considered acceptable)? _____
- Where was this equipment used prior to its arrival on site? _____
- Site Contaminants of concern at the previous site? _____
- Inside debris (coffee cups, soda cans, tools and equipment) blocking free access to foot controls? _____

Operator Qualifications (as applicable for all heavy equipment):

- Does the operator have proper licensing where applicable, (e.g., CDL)? _____
- Does the operator, understand the equipments operating instructions? _____
- Is the operator experienced with this equipment? _____
- Does the operator have emotional and/or physical limitations which would prevent him/her from performing this task in a safe manner? _____
- Is the operator 21 years of age or more? _____

Identification:

- Is a tagging system available, for positive identification, for tools removed from service? _____

Additional Inspection Required Prior to Use On-Site

- | | Yes | No |
|---|--------------------------|--------------------------|
| - Does equipment emit noise levels above 90 decibels? | <input type="checkbox"/> | <input type="checkbox"/> |
| - If so, has an 8-hour noise dosimetry test been performed? | <input type="checkbox"/> | <input type="checkbox"/> |
| - Results of noise dosimetry: _____ | | |
| - Defects and repairs needed: _____ | | |
| - General Safety Condition: _____ | | |
| - Operator or mechanic signature: _____ | | |

Approved for Use: Yes No

Site Safety Officer Signature

ATTACHMENT V
SAFE WORK PERMITS

**SAFE WORK PERMIT
SOIL BORING OPERATIONS INSIDE BUILDINGS 106 AND 107
NSWC, CRANE INDIANA**

Permit No. _____ Date: _____ Time: From _____ to _____

SECTION I: General Job Scope

- I. Work limited to the following (description, area, equipment used): Soil boring using direct push technology. Concrete coring is also included in this task if it is determined to be necessary.
- II. Required Monitoring Instrument(s): FID or PID with at least a 10.6 eV lamp and Four Gas Air Monitoring Instrument for LEL, O2, CO, NO2.
- III. Field Crew: _____
- IV. On-site inspection conducted Yes No Initials of Inspector TINUS

SECTION II: General Safety Requirements (To be filled in by permit issuer)

- V. Protective equipment required Respiratory equipment required
 - Level D Level B
 - Level C Level A
 - Detailed on ReverseFull face APR Escape Pack
Half face APR None
- Modifications/Exceptions: Minimum requirement include sleeved shirt and long pants, safety footwear, and nitrile gloves

VI. Chemicals of Concern	Action Level(s)	Response Measures
VOC's including	Sustained readings > 1 min	Suspend site activities and
<u>TCE, 1,1,1-TCA, 1,2-DCE,</u>	<u>>1 ppm⁽¹⁾</u>	<u>retreat to an unaffected area.</u>
<u>1,1-DCE and 1,1-DCA</u>		
<u>Exhaust gases</u>	<u>> 25 ppm CO</u>	<u>Vent exhaust to outside / report</u>
	<u>> 5 ppm NO2</u>	<u>to an unaffected area.</u>

- VII. Additional Safety Equipment/Procedures

Hard-hat.....	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	Hearing Protection (Plugs/Muffs)	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Safety Glasses	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	Safety belt/harness	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Chemical/splash goggles	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Radio	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Splash Shield	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Barricades.....	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Splash suits/coveralls.....	<input type="checkbox"/> Yes <input type="checkbox"/> No	Gloves (Type - Nitrile).....	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Steel toe Work shoes or boots	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	Work/rest regimen	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

Modifications/Exceptions: Tyvek coverall if there is a potential for soiling work cloths and PVC or PE coated Tyvek if saturation or work cloths may occur.

VIII. Procedure review with permit acceptors	Yes	NA	Yes	NA
Safety shower/eyewash (Location & Use).....	<input type="checkbox"/>	<input type="checkbox"/>	Emergency alarms.....	<input type="checkbox"/>
Procedure for safe job completion.....	<input type="checkbox"/>	<input type="checkbox"/>	Evacuation routes.....	<input type="checkbox"/>
Contractor tools/equipment/PPE inspected.....	<input type="checkbox"/>	<input type="checkbox"/>	Assembly points	<input type="checkbox"/>

- IX. Site Preparation

Utility Locating and Excavation Clearance completed	<input type="checkbox"/>	Yes	NA
Vehicle and Foot Traffic Routes Cleared and Established.....	<input type="checkbox"/>		
Physical Hazards Barricaded and Isolated	<input type="checkbox"/>		
Emergency Equipment Staged	<input type="checkbox"/>		

- X. Additional Permits required (Hot work, confined space entry, excavation etc.) Yes No
If yes, complete permit required or contact Health Sciences, Pittsburgh Office

- XI. Special instructions, precautions VOCs particularly TCE are primarily associated with SWMU 16. Contaminants may be bound to particulates, avoid generation of dusts. If necessary use area wetting methods. Equipment (drill rigs and DPT) shall be inspected using Attachment IV of the HASP. Vent exhaust gases to the outside using flexible hoses – provide general ventilation (open windows, roof vents, etc) to facilitate dilution and dispersion of exhaust gases.

Permit Issued by: _____ Permit Accepted by: _____

**SAFE WORK PERMIT FOR
SOIL BORING ACTIVITIES USING DPT
AT SWMU 8 AND 15**

Permit No. _____ Date: _____ Time: From _____ to _____

SECTION I: General Job Scope

- I. Work limited to the following (description, area, equipment used): Soil borings using DPT
- II. Required Monitoring Instruments: PID w/ 10.6 eV lamp or higher or FID
- III. Field Crew: _____
- IV. On-site Inspection conducted Yes No Initials of Inspector TtNUS

SECTION II: General Safety Requirements (To be filled in by permit issuer)

- IV. Protective equipment required Respiratory equipment required
- | | |
|--|---|
| Level D <input checked="" type="checkbox"/> Level B <input type="checkbox"/> | Full face APR <input type="checkbox"/> None <input checked="" type="checkbox"/> |
| Level C <input type="checkbox"/> Level A <input type="checkbox"/> | Half face APR <input type="checkbox"/> |

Modifications/Exceptions: Minimum requirement include sleeved shirt and long pants, safety shoes, and safety glasses. Safety glasses and hard hat when working within 50 feet of drilling rig or when associated hazards are present.

- | | | |
|---|---|---|
| V. Chemicals of Concern | Action Level(s) | Response Measures |
| <u>VOCs, metals, and to a lesser extent, SVOCs, PCP, and caustics</u> | <u>Sustained readings > 1 min > 1 ppm⁽¹⁾</u> | <u>Suspend site activities and retreat to an unaffected area.</u> |

- VI. Additional Safety Equipment/Procedures
- | | |
|--|--|
| Hard-hat..... <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Hearing Protection (Plugs/Muffs)..... <input type="checkbox"/> Yes <input type="checkbox"/> No |
| Safety Glasses..... <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Safety belt/harness..... <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |
| Chemical/splash goggles..... <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Radio..... <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |
| Splash Shield..... <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Barricades..... <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |
| Splash suits/coveralls..... <input type="checkbox"/> Yes <input type="checkbox"/> No | Gloves (Nitrile/leather)..... <input type="checkbox"/> Yes <input type="checkbox"/> No |
| Steel toe Work shoes or boots <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Work/rest regimen..... <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |

Modifications/Exceptions: Hearing protection when working near drilling operations. Reflective vests for work performed on or near road. Tyvek coverall there is a potential for soiling work clothes. Nitrile or leather (for drill operator/helper) gloves when contact with potential contaminated media/pinch points exists.

- | | | | | | |
|---|--------------------------|--------------------------|------------------------|--------------------------|--------------------------|
| VII. Procedure review with permit acceptors | Yes | NA | | Yes | NA |
| Safety shower/eyewash (Location & Use)..... | <input type="checkbox"/> | <input type="checkbox"/> | Emergency alarms..... | <input type="checkbox"/> | <input type="checkbox"/> |
| Procedure for safe job completion..... | <input type="checkbox"/> | <input type="checkbox"/> | Evacuation routes..... | <input type="checkbox"/> | <input type="checkbox"/> |
| Contractor tools/equipment/PPE inspected..... | <input type="checkbox"/> | <input type="checkbox"/> | Assembly points..... | <input type="checkbox"/> | <input type="checkbox"/> |

- | | | | |
|--|--------------------------|--------------------------|--------------------------|
| IX. Site Preparation | Yes | No | NA |
| Utility Locating and Excavation Clearance completed..... | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Vehicle and Foot Traffic Routes Cleared and Established..... | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Physical Hazards Barricaded and Isolated..... | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Emergency Equipment Staged..... | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

- IX. Additional Permits required (Hot work, confined space entry, excavation etc.)..... Yes No
If yes, complete permit required or contact Health Sciences, Pittsburgh Office

- X. Special instructions, precautions: (1) – Quantitative data regarding potential site contaminants is not available. Suspected contaminants of concern are based on available historical information. As a result, a conservative action level has been established. Prevent the spread of soil cuttings onto maintained lawns. Containerize all soils. If above ground utility lines are present – use spotter and implement avoidance procedures. Follow TtNUS SOP "Utility Locating and Excavation Clearance". Use safe lifting practices when handling heavy/awkward equipment. Inspect and test emergency stop devices daily prior to start of drilling operations. Prevent access of unauthorized personnel into exclusion zone. All site visitors shall be escorted by TtNUS personnel or other authorized personnel (direct to TtNUS TOM).

Permit Issued by: _____ Permit Accepted by: _____

**SAFE WORK PERMIT FOR
DECONTAMINATION ACTIVITIES
AT BUILDINGS 106 AND 107**

Permit No. _____ Date: _____ Time: From _____ to _____

SECTION I: General Job Scope

- I. Work limited to the following (description, area, equipment used): Decontamination of sampling equipment and machinery (i.e., DPT rigs). Brushes and spray bottles will be used to decon small sampling equipment. Pressure washers will be used to decon heavy equipment.
- II. Required Monitoring Instrument(s): None required
- III. Field Crew: _____
- IV. On-site Inspection conducted Yes No Initials of Inspector TtNUS

SECTION II: General Safety Requirements (To be filled in by permit issuer)

- V. Protective equipment required Respiratory equipment required
- | | | | | | |
|---|----------------------------------|---------------|--------------------------|----------------|-------------------------------------|
| Level D <input checked="" type="checkbox"/> | Level B <input type="checkbox"/> | Full face APR | <input type="checkbox"/> | Escape Pack | <input type="checkbox"/> |
| Level C <input type="checkbox"/> | Level A <input type="checkbox"/> | Half face APR | <input type="checkbox"/> | SCBA | <input type="checkbox"/> |
| Detailed on Reverse | | PAPR | <input type="checkbox"/> | Bottle Trailer | <input type="checkbox"/> |
| | | Skid Rig | <input type="checkbox"/> | None | <input checked="" type="checkbox"/> |
- Modifications/Exceptions: Minimum requirement include sleeved shirt and long pants, safety glasses, safety footwear, and nitrile gloves. When using pressure washers, steam cleaners field crews will wear hearing protection, and face shields.

- | | | |
|---------------------------------|--------------------------------|---------------------------------------|
| VI. Chemicals of Concern | Action Level(s) | Response Measures |
| VOC's including | Sustained readings > 1 min | Suspend site activities and |
| <u>TCE, 1,1,1-TCA, 1,2-DCE,</u> | <u>>1 ppm⁽¹⁾</u> | <u>retreat to an unaffected area.</u> |
| <u>1,1-DCE and 1,1-DCA</u> | | |

- VII. Additional Safety Equipment/Procedures
- | | | | |
|----------------------------------|---|---------------------------------------|---|
| Hard-hat..... | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Hearing Protection (Plugs/Muffs)..... | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No |
| Safety Glasses | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Safety belt/harness..... | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |
| Chemical/splash goggles | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Radio | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |
| Splash Shield | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Barricades..... | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |
| Splash suits/coveralls..... | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Gloves (Type - Nitrile)..... | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No |
| Steel toe work shoes/boots | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Work/rest regimen | <input type="checkbox"/> Yes <input type="checkbox"/> No |
- Modifications/Exceptions: PVC rain suits or PE or PVC coated Tyvek for protection against splashes and over-spray. Chemical resistant boot covers if excessive liquids are generated or to protect footwear.

- | | | | | |
|---|--------------------------|--------------------------|------------------------|--------------------------|
| VIII. Procedure review with permit acceptors | Yes | NA | Yes | NA |
| Safety shower/eyewash (Location & Use)..... | <input type="checkbox"/> | <input type="checkbox"/> | Emergency alarms..... | <input type="checkbox"/> |
| Procedure for safe job completion..... | <input type="checkbox"/> | <input type="checkbox"/> | Evacuation routes..... | <input type="checkbox"/> |
| Contractor tools/equipment/PPE inspected..... | <input type="checkbox"/> | <input type="checkbox"/> | Assembly points | <input type="checkbox"/> |

- | | | | |
|--|--------------------------|--------------------------|-------------------------------------|
| IX. Site Preparation | Yes | No | NA |
| Utility Locating and Excavation Clearance completed..... | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| Vehicle and Foot Traffic Routes Cleared and Established..... | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Physical Hazards Barricaded and Isolated..... | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Emergency Equipment Staged..... | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

- IX. Additional Permits required (Hot work, confined space entry, excavation etc.)..... Yes No
If yes, complete permit required or contact Health Sciences, Pittsburgh Office

- X. Special instructions, precautions: To minimize the potential for exposure, site personnel will use PPE and prevent contact with potentially contaminated equipment. Refer to the manufacturer's MSDS regarding PPE, handling, storage, and first-aid measures related to decontamination fluids.

Permit Issued by: _____ Permit Accepted by: _____

**SAFE WORK PERMIT FOR
DECONTAMINATION ACTIVITIES
AT SWMU 8 AND 15**

Permit No. _____ Date: _____ Time: From _____ to _____

SECTION I: General Job Scope

- I. Work limited to the following (description, area, equipment used): Decontamination of sampling equipment and machinery (i.e., DPT rigs). Brushes and spray bottles will be used to decon small sampling equipment. Pressure washers will be used to decon heavy equipment.
- II. Required Monitoring Instrument(s): None required
- III. Field Crew: _____
- IV. On-site Inspection conducted Yes No Initials of Inspector TINUS

SECTION II: General Safety Requirements (To be filled in by permit issuer)

- V. Protective equipment required
 Level D Level B
 Level C Level A
 Detailed on Reverse
- Respiratory equipment required
 Full face APR Escape Pack
 Half face APR SCBA
 PAPR Bottle Trailer
 Skid Rig None
- Modifications/Exceptions: Minimum requirement include sleeved shirt and long pants, safety glasses, safety footwear, and nitrile gloves. When using pressure washers, steam cleaners field crews will wear hearing protection, and face shields.

VI. Chemicals of Concern	Action Level(s)	Response Measures
<u>VOCs, metals, and to a lesser extent, SVOCs, PCP, and caustics</u>	<u>Sustained readings > 1 min >1 ppm</u>	<u>Suspend site activities and retreat to an unaffected area.</u>

- VII. Additional Safety Equipment/Procedures
- | | | | |
|----------------------------------|---|---------------------------------------|---|
| Hard-hat..... | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Hearing Protection (Plugs/Muffs)..... | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No |
| Safety Glasses | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Safety belt/harness | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |
| Chemical/splash goggles | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Radio | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |
| Splash Shield | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Barricades..... | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |
| Splash suits/coveralls..... | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Gloves (Type - Nitrile)..... | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No |
| Steel toe work shoes/boots | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Work/rest regimen | <input type="checkbox"/> Yes <input type="checkbox"/> No |
- Modifications/Exceptions: PVC rain suits or PE or PVC coated Tyvek for protection against splashes and over-spray. Chemical resistant boot covers if excessive liquids are generated or to protect footwear.

VIII. Procedure review with permit acceptors	Yes	NA	Yes	NA
Safety shower/eyewash (Location & Use).....	<input type="checkbox"/>	<input type="checkbox"/>	Emergency alarms.....	<input type="checkbox"/>
Procedure for safe job completion.....	<input type="checkbox"/>	<input type="checkbox"/>	Evacuation routes.....	<input type="checkbox"/>
Contractor tools/equipment/PPE inspected.....	<input type="checkbox"/>	<input type="checkbox"/>	Assembly points	<input type="checkbox"/>

IX. Site Preparation	Yes	No	NA
Utility Locating and Excavation Clearance completed.....	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Vehicle and Foot Traffic Routes Cleared and Established.....	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Physical Hazards Barricaded and Isolated.....	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Emergency Equipment Staged.....	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

- IX. Additional Permits required (Hot work, confined space entry, excavation etc.)..... Yes No
If yes, complete permit required or contact Health Sciences, Pittsburgh Office

- X. Special instructions, precautions: To minimize the potential for exposure, site personnel will use PPE and prevent contact with potentially contaminated equipment. Refer to the manufacturer's MSDS regarding PPE, handling, storage, and first-aid measures related to decontamination fluids.

Permit Issued by: _____ Permit Accepted by: _____

**SAFE WORK PERMIT FOR BUILDINGS 106 AND 107
INVESTIGATIVE DERIVED WASTE (IDW) ACTIVITIES
NSWC, CRANE INDIANA**

Permit No. _____ Date: _____ Time: From _____ to _____

SECTION I: General Job Scope

- I. Work limited to the following (description, area, equipment used): Handling, sampling and staging of IDW drums.
- II. Required Monitoring Instruments: FID or PID with 10.6eV (or higher) lamp
- III. Field Crew: _____
- IV. On-site Inspection conducted Yes No Initials of Inspector _____

TINUS

SECTION II: General Safety Requirements (To be filled in by permit issuer)

- | | | |
|--|--|--|
| IV. Protective equipment required | Respiratory equipment required | |
| Level D <input checked="" type="checkbox"/> Level B <input type="checkbox"/> | Full face APR <input type="checkbox"/> | Escape Pack <input type="checkbox"/> |
| Level C <input type="checkbox"/> Level A <input type="checkbox"/> | Half face APR <input type="checkbox"/> | Airline/SCBA <input type="checkbox"/> |
| Detailed on Reverse | PAPR <input type="checkbox"/> | Bottle trailer <input type="checkbox"/> |
| | Skid Rig <input type="checkbox"/> | None <input checked="" type="checkbox"/> |

Modifications/Exceptions: Minimum requirement include sleeved shirt and long pants, safety shoes, hardhat, nitrile outer gloves with surgical-style inner gloves, impermeable boot covers.

- | | | |
|---------------------------------|--------------------------------|---------------------------------------|
| VI. Chemicals of Concern | Action Level(s) | Response Measures |
| VOC's including | Sustained readings > 1 min | Suspend site activities and |
| <u>TCE, 1,1,1-TCA, 1,2-DCE,</u> | <u>>1 ppm⁽¹⁾</u> | <u>retreat to an unaffected area.</u> |
| <u>1,1-DCE and 1,1-DCA</u> | | |

- VII. Additional Safety Equipment/Procedures
- | | | | |
|------------------------------------|---|---------------------------------------|---|
| Hard-hat..... | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Hearing Protection (Plugs/Muffs)..... | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |
| Safety Glasses | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Safety belt/harness | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |
| Chemical/splash goggles..... | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Radio | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |
| Splash Shield | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Barricades | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |
| Splash suits/coveralls..... | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Gloves (Type - Nitrile) | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No |
| Steel toe Work shoes or boots..... | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Work/rest regimen..... | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No |
- Modifications/Exceptions: Tyvek coverall if there is a potential for soiling clothes. Work/rest regimen to be determined by SSO & site personnel

- | | | | | | |
|---|--------------------------|--------------------------|------------------------|--------------------------|--------------------------|
| VIII. Procedure review with permit acceptors | Yes | NA | Emergency alarms | Yes | NA |
| Safety shower/eyewash (Location & Use)..... | <input type="checkbox"/> | <input type="checkbox"/> | Evacuation routes..... | <input type="checkbox"/> | <input type="checkbox"/> |
| Procedure for safe job completion | <input type="checkbox"/> | <input type="checkbox"/> | Assembly points..... | <input type="checkbox"/> | <input type="checkbox"/> |
| Contractor tools/equipment/PPE inspected..... | <input type="checkbox"/> | <input type="checkbox"/> | | | |

- | | | |
|---|--------------------------|--------------------------|
| IX. Site Preparation | Yes | NA |
| Utility Locating and Excavation Clearance completed..... | <input type="checkbox"/> | <input type="checkbox"/> |
| Vehicle and Foot Traffic Routes Cleared and Established | <input type="checkbox"/> | <input type="checkbox"/> |
| Physical Hazards Barricaded and Isolated | <input type="checkbox"/> | <input type="checkbox"/> |
| Emergency Equipment Staged | <input type="checkbox"/> | <input type="checkbox"/> |

- IX. Additional Permits required (Hot work, confined space entry, excavation etc.)..... Yes No
If yes, complete permit required or contact Health Sciences, Pittsburgh Office

- X. Special instructions, precautions: _____
- _____
- _____

Permit Issued by: _____

Permit Accepted by: _____

**SAFE WORK PERMIT FOR BUILDINGS 106 AND 107
MOBILIZATION AND DEMOBILIZATION ACTIVITIES**

Permit No. _____ Date: _____ Time: From _____ to _____

SECTION I: General Job Scope

- I. Work limited to the following (description, area, equipment used): Mobilization and demobilization activities. Surveying activities (if applicable) are also included in this permit since similar hazards exist.
- II. Required Monitoring Instruments: None
- III. Field Crew: _____
- IV. On-site Inspection conducted Yes No Initials of Inspector TtNUS

SECTION II: General Safety Requirements (To be filled in by permit issuer)

- V. Protective equipment required
 - Level D Level B
 - Level C Level A
 - Detailed on Reverse
- Respiratory equipment required
 - Full face APR
 - Half face APR
 - PAPR
 - Skid Rig
- Escape Pack
- SCBA
- Bottle Trailer
- None

Modifications/Exceptions: Minimum requirement include sleeved shirt and long pants, or coveralls, safety glasses and safety footwear. Hard hats and hearing protection will be worn when working near operating equipment.

VI. Chemicals of Concern	Action Level(s)	Response Measures
<u>None anticipated given the nature of activities and limited contact w/ media.</u>	<u>None</u>	<u>None</u>

- VII. Additional Safety Equipment/Procedures

Hard-hat.....	<input type="checkbox"/> Yes <input type="checkbox"/> No	Hearing Protection (Plugs/Muffs) ...	<input type="checkbox"/> Yes <input type="checkbox"/> No
Safety Glasses	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	Safety belt/harness	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Chemical/splash goggles.....	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Radio.....	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Splash Shield.....	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Barricades.....	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Splash suits/coveralls	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Gloves (Type - Nitrile)	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Steel toe Work shoes or boots	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	Work/rest regimen.....	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
- Modifications/Exceptions: Tyvek coverall to protect against natural hazards (e.g., ticks). If working in areas where snakes are a threat, wear snake chaps to protect against bites.

VIII. Procedure review with permit acceptors	Yes	NA	Yes	NA
Safety shower/eyewash (Location & Use).....	<input type="checkbox"/>	<input type="checkbox"/>	Emergency alarms.....	<input type="checkbox"/>
Procedure for safe job completion.....	<input type="checkbox"/>	<input type="checkbox"/>	Evacuation routes.....	<input type="checkbox"/>
Contractor tools/equipment/PPE inspected.....	<input type="checkbox"/>	<input type="checkbox"/>	Assembly points.....	<input type="checkbox"/>

- IX. Site Preparation

Utility Locating and Excavation Clearance completed.....	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Equipment and Foot Traffic Routes Cleared and Established.....	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Physical Hazards Barricaded and Isolated.....	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Emergency Equipment Staged.....	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

- X. Additional Permits required (Hot work, confined space entry, excavation etc.)..... Yes No
If yes, complete permit required or contact Health Sciences, Pittsburgh Office

- XI. Special instructions, precautions: Preview work locations to identify potential hazards (slips, trips, and falls, natural hazards, etc.) Avoid potential nesting areas. Wear light colored clothing so that ticks and other biting insects can be easily visible and can be removed. Inspect clothing and body for ticks. Minimize contact with potentially contaminated media. Suspend site activities in the event of inclement weather.

Permit Issued by: _____ Permit Accepted by: _____

**SAFE WORK PERMIT FOR BUILDINGS 106 AND 107
MULTI-MEDIA SAMPLING**

Permit No. _____ Date: _____ Time: From _____ to _____

SECTION I: General Job Scope

- I. Work limited to the following (description, area, equipment used): Multi-media sampling including surface and subsurface soils, groundwater, sediments, and surface water. IDW sampling (if applicable) is also included in this task.
- II. Required Monitoring Instrument(s): PID with 10.6 eV or higher lamp or FID
- III. Field Crew: _____
- IV. On-site Inspection conducted Yes No Initials of Inspector TtNUS

SECTION II: General Safety Requirements (To be filled in by permit issuer)

- IV. Protective equipment required Respiratory equipment required

Level D <input checked="" type="checkbox"/> Level B <input type="checkbox"/>	Full face APR <input type="checkbox"/>	Escape Pack <input type="checkbox"/>
Level C <input type="checkbox"/> Level A <input type="checkbox"/>	Half face APR <input type="checkbox"/>	SCBA <input type="checkbox"/>
Detailed on Reverse	PAPR <input type="checkbox"/>	Bottle Trailer <input type="checkbox"/>
	Skid Rig <input type="checkbox"/>	None <input checked="" type="checkbox"/>

Modifications/Exceptions: Minimum requirements include sleeved shirt and long pants, safety shoes, surgical style gloves, and safety glasses. Hard hats and hearing protection will be worn when working near operating equipment or when required by the SSO. Reflective vests will be worn for high traffic areas.

- V. Chemicals of Concern Action Level(s) Response Measures

VOC's including	Sustained readings > 1 min	Suspend site activities and
<u>TCE, 1,1,1-TCA, 1,2-DCE,</u>	<u>>1 ppm⁽¹⁾</u>	<u>retreat to an unaffected area.</u>
<u>1,1-DCE and 1,1-DCA</u>		

- VI. Additional Safety Equipment/Procedures

Hard-hat..... <input type="checkbox"/> Yes <input type="checkbox"/> No	Hearing Protection (Plugs/Muffs) <input type="checkbox"/> Yes <input type="checkbox"/> No
Safety Glasses <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	Safety belt/harness..... <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Chemical/splash goggles..... <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Radio..... <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Splash Shield..... <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Barricades..... <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Splash suits/coveralls..... <input type="checkbox"/> Yes <input type="checkbox"/> No	Gloves (Type - Nitrile)..... <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Steel toe Work shoes or boots <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	Work/rest regimen..... <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

Modifications/Exceptions: Tyvek coverall if there is a potential for soiling work cloths. SSO may require double-layering gloves.

- VII. Procedure review with permit acceptors Yes NA Yes NA

Safety shower/eyewash (Location & Use)..... <input type="checkbox"/> <input type="checkbox"/>	Emergency alarms..... <input type="checkbox"/> <input type="checkbox"/>
Procedure for safe job completion..... <input type="checkbox"/> <input type="checkbox"/>	Evacuation routes..... <input type="checkbox"/> <input type="checkbox"/>
Contractor tools/equipment/PPE inspected..... <input type="checkbox"/> <input type="checkbox"/>	Assembly points..... <input type="checkbox"/> <input type="checkbox"/>

- IX. Site Preparation

Utility Locating and Excavation Clearance completed.....	Yes	No	NA
Vehicle and Foot Traffic Routes Cleared and Established.....	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Physical Hazards Barricaded and Isolated.....	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Emergency Equipment Staged.....	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

- X. Additional Permits required (Hot work, confined space entry, excavation etc.)..... Yes No
If yes, complete permit required or contact Health Sciences, Pittsburgh Office

- XI. Special instructions, precautions: (1) – Quantitative data regarding potential site contaminants is not available. Suspected contaminants of concern are based on available historical information. As a result, a conservative action level has been established. Avoid contact with potentially contaminated media (soils, groundwater, surface water, etc.).

Permit Issued by: _____ Permit Accepted by: _____

**SAFE WORK PERMIT FOR
MULTI-MEDIA SAMPLING
AT SWMU 8 AND 15**

Permit No. _____ Date: _____ Time: From _____ to _____

SECTION I: General Job Scope

- I. Work limited to the following (description, area, equipment used): Multi-media sampling including surface and subsurface soils, groundwater, sediments, and surface water. IDW sampling (if applicable) is also included in this task.
- II. Required Monitoring Instrument(s): PID with 10.6 eV or higher lamp or FID
- III. Field Crew: _____
- IV. On-site Inspection conducted Yes No Initials of Inspector: TINUS

SECTION II: General Safety Requirements (To be filled in by permit issuer)

- IV. Protective equipment required Respiratory equipment required
- | | | | |
|---|----------------------------------|--|--|
| Level D <input checked="" type="checkbox"/> | Level B <input type="checkbox"/> | Full face APR <input type="checkbox"/> | Escape Pack <input type="checkbox"/> |
| Level C <input type="checkbox"/> | Level A <input type="checkbox"/> | Half face APR <input type="checkbox"/> | SCBA <input type="checkbox"/> |
| Detailed on Reverse | | PAPR <input type="checkbox"/> | Bottle Trailer <input type="checkbox"/> |
| | | Skid Rig <input type="checkbox"/> | None <input checked="" type="checkbox"/> |

Modifications/Exceptions: Minimum requirements include sleeved shirt and long pants, safety shoes, surgical style gloves, and safety glasses. Hard hats and hearing protection will be worn when working near operating equipment or when required by the SSO. Reflective vests will be worn for high traffic areas.

- V. Chemicals of Concern Action Level(s) Response Measures
- | | | |
|---|---|---|
| <u>VOCs, metals, and to a lesser extent, SVOCs, PCP, and caustics</u> | <u>Sustained readings > 1 min > 1 ppm⁽¹⁾</u> | <u>Suspend site activities and retreat to an unaffected area.</u> |
|---|---|---|

- VI. Additional Safety Equipment/Procedures
- | | | | |
|-------------------------------------|---|--|---|
| Hard-hat..... | <input type="checkbox"/> Yes <input type="checkbox"/> No | Hearing Protection (Plugs/Muffs) <input type="checkbox"/> Yes <input type="checkbox"/> No | |
| Safety Glasses | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Safety belt/harness..... <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | |
| Chemical/splash goggles..... | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Radio | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |
| Splash Shield..... | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Barricades | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |
| Splash suits/coveralls | <input type="checkbox"/> Yes <input type="checkbox"/> No | Gloves (Type - Nitrile)..... | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No |
| Steel toe Work shoes or boots | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Work/rest regimen..... | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |

Modifications/Exceptions: Tyvek coverall if there is a potential for soiling work cloths. SSO may require double-layering gloves.

- VII. Procedure review with permit acceptors Yes NA
- | | | | | | |
|---|--------------------------|--------------------------|------------------------|--------------------------|--------------------------|
| Safety shower/eyewash (Location & Use)..... | <input type="checkbox"/> | <input type="checkbox"/> | Emergency alarms..... | <input type="checkbox"/> | <input type="checkbox"/> |
| Procedure for safe job completion..... | <input type="checkbox"/> | <input type="checkbox"/> | Evacuation routes..... | <input type="checkbox"/> | <input type="checkbox"/> |
| Contractor tools/equipment/PPE inspected..... | <input type="checkbox"/> | <input type="checkbox"/> | Assembly points..... | <input type="checkbox"/> | <input type="checkbox"/> |

- IX. Site Preparation
- | | | | |
|--|--------------------------|--------------------------|--------------------------|
| Utility Locating and Excavation Clearance completed..... | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Vehicle and Foot Traffic Routes Cleared and Established..... | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Physical Hazards Barricaded and Isolated..... | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Emergency Equipment Staged..... | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

- X. Additional Permits required (Hot work, confined space entry, excavation etc.)..... Yes No
If yes, complete permit required or contact Health Sciences, Pittsburgh Office

- XI. Special instructions, precautions: (1) - Quantitative data regarding potential site contaminants is not available. Suspected contaminants of concern are based on available historical information. As a result, a conservative action level has been established. Avoid contact with potentially contaminated media (soils, groundwater, surface water, etc.).

Permit Issued by: _____ Permit Accepted by: _____