

N00639.AR.002161
NSA MID SOUTH
5090.3a

FINAL MONTHLY ACTIVITIES REPORT MOBILE ENHANCED MULTI-PHASE EXTRACTION
MILLINGTON SUPPACT TN
5/12/1999
BAT ASSOCIATES, INC.

MONTHLY ACTIVITIES REPORT

MOBILE ENHANCED MULTI-PHASE EXTRACTION (MEME) AT THE NAVAL EXCHANGE SERVICE STATION; NAVAL SUPPORT ACTIVITY MID-SOUTH, MILLINGTON, TENNESSEE

FACILITY I.D. No. 0-791718

FINAL May 12, 1999

Prepared by:

BAT Associates, Inc.
704 South Illinois Ave, Suite C-202
Oak Ridge, Tennessee 37830

Prepared for:

Department of the Navy
Southern Division
Under Contract No. N62467-98-D-0938
Naval Facilities Engineering Command
2155 Eagle Drive
P.O. Box 190010
North Charleston, South Carolina 29419-1910

BAT PROJECT NO. 983019

TABLE OF CONTENTS

| | | |
|------------|---|----------|
| 1.0 | PROJECT DESCRIPTION AND BACKGROUND | 1 |
| 1.1 | Project Description | 1 |
| 1.2 | Project Background | 1 |
| 1.3 | MEME Technology Employed | 3 |
| 2.0 | SUMMARY OF RESULTS | 4 |
| 2.1 | Petroleum Hydrocarbons Removed | 4 |
| 2.2 | Offgas Concentrations | 5 |
| 2.3 | Flow Rates | 6 |
| 2.4 | Extraction Wellhead Vacuum Readings | 6 |
| 2.5 | Groundwater Disposal | 7 |

LIST OF FIGURES

| | | |
|------------|--|---|
| Figure 1-1 | Site Map and Monitoring Well Locations | 2 |
|------------|--|---|

LIST OF TABLES

| | | |
|---------|---|---|
| Table 1 | Summary of Petroleum Hydrocarbons Removed | 5 |
| Table 2 | Summary of Sixth Event Vacuum Readings | 6 |

APPENDICES

| | | |
|------------|------------------------|--|
| Appendix A | MEME Field Data Sheets | |
|------------|------------------------|--|

1.0 PROJECT DESCRIPTION AND BACKGROUND

1.1 Project Description

BAT Associates, Inc. (BAT), under contract number N62467-98-D-0938, has been tasked by the Department of the Navy, Southern Division Engineering Facilities Command to perform mobile enhanced multi-phase extraction (MEME) technology at the Naval Exchange Service Station at the Naval Support Activity (NSA) MID-South, Millington, Tennessee (Facility I.D. No. 0-791718).

The application of the MEME events are intended to be an abatement initiative to reduce the levels of dissolved benzene, toluene, ethyl benzene, and xylene (BTEX), and total petroleum hydrocarbons (TPH) constituents in groundwater. This report summarizes data obtained from the MEME performed April 15, 1999. Field activities were conducted in accordance with BAT's approved final Plan of Action and the Tennessee Department of Environment and Conservation's (TDEC) Technical Guidance Document (TGD)-016.

1.2 Project Background

The Naval Exchange Service Station is located in the northwestern quadrant of NSA Memphis. The site encompasses approximately three acres, is flat, drains surficially to the west, and is covered with asphalt pavement.

A loss of gasoline was discovered in February 1986 by Exchange Service Station personnel. The initial release was reported to TDEC in March 1986. A preliminary investigation of this leak by Navy personnel revealed that a pipe joint on the regular unleaded gasoline fuel line was leaking. As part of former site assessments, twenty-two (22) groundwater monitoring wells were installed.

Several groundwater monitoring events performed between 1987 and 1998 indicate that the contaminated groundwater has not moved from the immediate vicinity of the fuel line leak. TDEC has established that cleanup levels for groundwater for the "non-drinking water" classification is 0.070 ppm for benzene and 1.0 ppm for TPH. TPH and Benzene concentrations in the groundwater did exceed TDEC action levels for a non-drinking aquifer in ten (10) monitoring wells (MEM-757-1 through -3, MEM-757-6 through -8, MEM-757-12 through -14, and MEM-757-B3). Therefore, only these ten (10) wells were used for this MEME event. Location of the wells is shown on Figure 1-1.

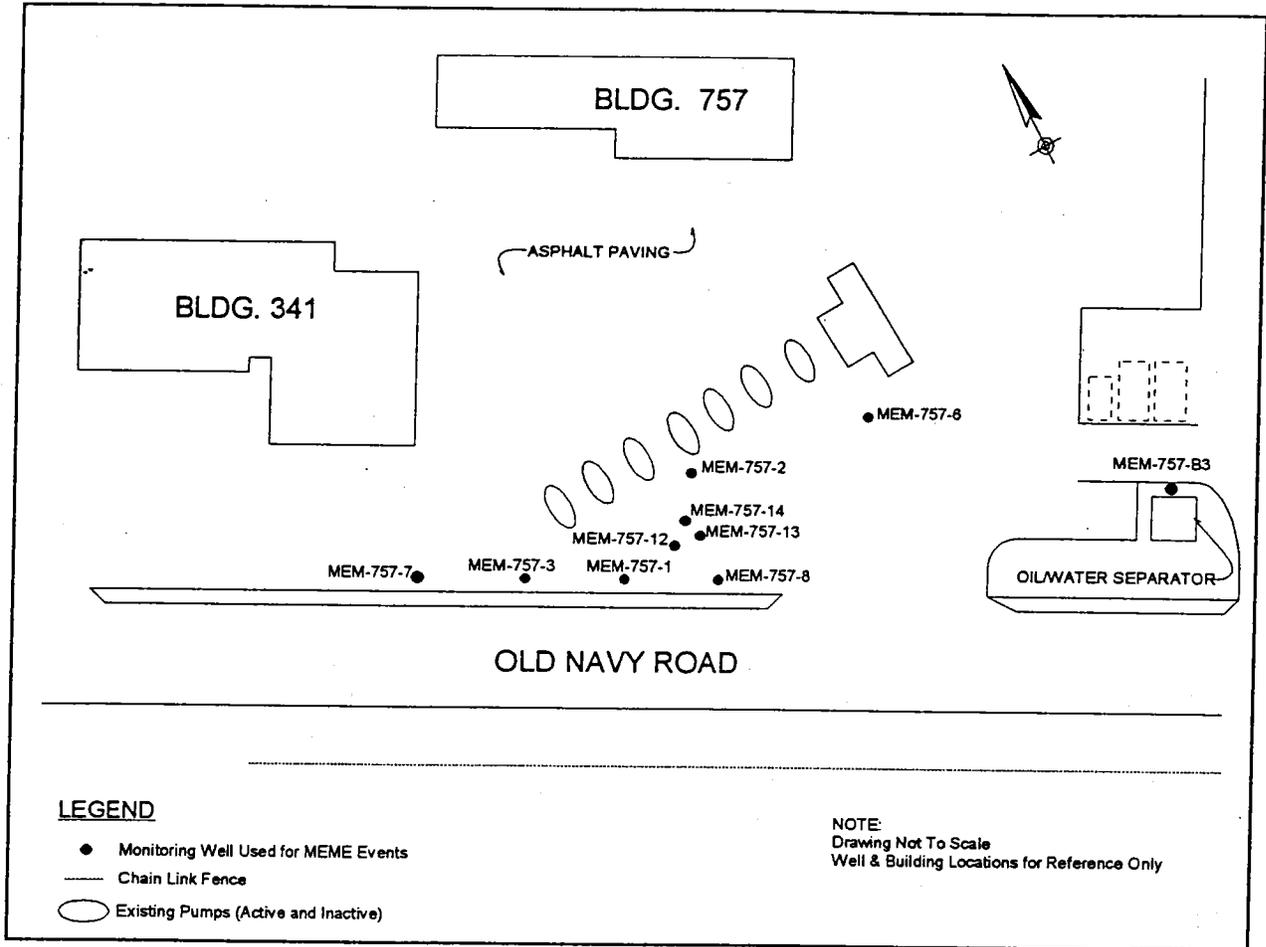


Figure 1-1 Site Map and Monitoring Well Locations

1.3 MEME Technology Employed

BAT utilized Enhanced Fluid Recovery (EFR™), a mobile variation of what is commonly referred to as multi-phase extraction, dual-phase extraction, and vacuum enhanced recovery. This technology is a remediation method that utilizes high vacuum pressures and flow rates to remove multiple phase (i.e. vapor, adsorbed, dissolved, and free phase) volatile organic compounds (VOCs) from the subsurface. It utilizes high vacuum and high flow rates simultaneously connected to monitoring or recovery wells.

The MEME simultaneously removes vapors, free product, and groundwater from the subsurface. It volatilizes adsorbed and free phase VOCs through a process similar to soil vapor extraction, but with much higher vacuum and radius of influence. MEME can also treat adsorbed phase VOCs existing in the "smear zone" (i.e. the zone of seasonal or climatic groundwater fluctuation) that act as a source for dissolved phase VOCs. MEME dewateres and exposes the smear zone to the effects of "high rate" soil vapor extraction. MEME also introduces oxygen to the vadose zone and saturated zones, thereby enhancing aerobic biodegradation.

2.0 SUMMARY OF RESULTS

This MEME is the sixth event that has been conducted at this site. Four previous events were conducted January 15-16, 1998 (initial event), January 29-30, 1998 (second event), January 19, 1999 (third event), February 10, 1999 (fourth event), and March 15, 1999 (fifth event).

Separate phase hydrocarbons (SPH) were not detected prior to, or upon completion of, conducting the April 15, 1999 MEME event. SPH has also not been detected during the previous five MEME events. This MEME event was performed for a duration of eight hours at ten extraction points, consisting of the initial three hours at monitoring wells MEM-2, MEM-8, MEM-13, and MEM-14, the ensuing three hours at MEM-1, MEM-3, MEM-7, and MEM-12, and the final two hours at MEM-6 and B-3.

The first and second events were conducted over two days consisting of eight hours at wells MEM-1, MEM-2, MEM-3, MEM-7, MEM-8, MEM-12, MEM-13, and MEM-14 on the first day, and eight hours at wells MEM-6 and B3 on the second day. The third event was conducted for eight hours consisting of the initial six hours at monitoring well MEM-1, MEM-2, MEM-3, MEM-7, MEM-8, MEM-12, MEM-13, and MEM-14 and the final two hours at MEM-6 and B-3. The fourth and fifth events were conducted in the same configuration and for the same duration as this sixth event.

2.1 Petroleum Hydrocarbons Removed

A calculated total of 389 pounds of carbon (approximately equivalent to 499 pounds of petroleum hydrocarbons - 82 equivalent gallons of gasoline) were removed during this MEME event. This recovered mass/volume of petroleum hydrocarbons represents a decrease from the removals achieved during the fifth event (i.e. a calculated total of 1,839 pounds of petroleum hydrocarbons - approximately 304 equivalent of gasoline), and during previous events (i.e. calculated total of 581 to 3,704 pounds of petroleum hydrocarbons - approximately 95 to 611 equivalent gallons of gasoline). A calculated total of 8,835 pounds of petroleum hydrocarbons (approximately 1,457 gallons of gasoline) have been recovered during the six MEME events conducted at this site.

A summary of petroleum hydrocarbons removed to date is shown in Table 1.

| TABLE 1 | | | |
|--|-------------------------|--|---|
| Summary of Petroleum Hydrocarbons Removed | | | |
| MEME Event Number | MEME Event Date | Petroleum Hydrocarbons Removed (lbs.) | Equivalent Gasoline Removed (gal.) |
| 1* | January 15 and 16, 1998 | 905 | 149 |
| 2* | January 29 and 30, 1998 | 581 | 95 |
| 3 | January 19, 1999 | 3,704 | 611 |
| 4 | February 10, 1999 | 1,307 | 216 |
| 5 | March 15, 1999 | 1,839 | 304 |
| 6 | April 15, 1999 | 499 | 82 |
| Total Removed To Date | | 8,835 | 1,457 |
| *Performed by others | | | |

The carbon removal rate ranged from 0.7 to 258 pounds per hour during this MEME event. The removal rate decreased from 258 to 16 pounds per hour during the initial three hours of extraction from wells MEM-2, MEM-8, MEM-13, and MEM-14. Upon commencement of extraction from wells MEM-1, MEM-3, MEM-7, and MEM-12, the carbon removal rate initially increased to 35 pounds per hour and generally decreased to 8 pph during the ensuing three hours of extraction. Upon commencement of extraction from MEM-6 and B-3, the carbon removal rate increased from 0.7 to 1.9 pounds per hour during the initial 1.5 hours and decreased to 1.4 pounds per hour during the final 0.5 hour of this event. These removal rates ranged lower than those achieved during the fourth event (i.e. 1.2 to 392 pounds per hour) and during previous events (i.e. 1.7 to 1,192 pounds per hour).

2.2 Offgas Concentrations

Offgas concentrations ranged from 120 to 60,000 ppm during this MEME event. Offgas concentrations decreased from 60,000 to 3,200 ppm during the initial three hours of extraction from MEM-2, MEM-8, MEM-13, and MEM-14. Upon commencement of extraction from MEM-1, MEM-3, MEM-7, and MEM-12, offgas concentrations generally decreased from 5,400 to 1,600 ppm during the ensuing three hours of extraction. Upon commencement of extraction from wells MEM-6 and B-3, the offgas concentrations increased from 120 to 480 ppm during the initial hour and decreased to 240 ppm during the final hour of this event. These offgas concentrations ranged lower than those recorded during the fifth event (i.e. 620 to 90,000 ppm) and during previous events (i.e. 700 to >100,000 ppm).

2.3 Flow Rates

Flow rates attained during this MEME event ranged from 403 to 734 CFM (377 to 548 DSCFM). The flow rate increased from 403 to 550 CFM during the initial three hours of extraction from MEM-2, MEM-8, MEM-13, and MEM-14. Upon commencement of extraction from MEM-1, MEM-3, MEM-7, and MEM-12, the flow rate increased to 734 CFM during the initial two hours and decreased to 550 CFM for the ensuing one hour of extraction. Upon commencement of extraction from wells MEM-6 and B-3, the flow rate ranged from 495 to 587 CFM during the final two hours of this event. These flow rates ranged higher than those recorded during the fifth event (i.e. 236 to 433 CFM) and are within range of those recorded during previous events (i.e. 257 to 1,100 CFM).

2.4 Extraction Wellhead Vacuum Readings

The range of vacuum readings recorded at the extraction wells during this MEME event are detailed in the field data sheets (Appendix A) and are summarized in Table 2 below.

| Extraction Well Location | Vacuum Reading (in. of mercury) |
|--------------------------|------------------------------------|
| MEM-1 | 9 to 10 |
| MEM-2 | 15 to 18 |
| MEM-3 | 14 to 15 |
| MEM-6 | 18 |
| MEM-7 | 6 to 7 |
| MEM-8 | 10 to 11 |
| MEM-12 | 14 to 15 |
| MEM-13 | 15 to 17 |
| MEM-14 | 13 to 15 |
| B-3 | 5 to 6 |

Differential pressures were recorded during this event to assess the vacuum induced by MEME in the vadose zone. These data are detailed in Appendix A and summarized below.

| <u>Monitoring Well</u> | <u>Maximum Change</u> | <u>Nearest Extraction Well (Approx. Distance)</u> |
|------------------------|-----------------------|---|
| MEM-12 | -0.05 inches of water | MEM-14 (9 feet) |
| MEM-3 | 0.00 inches of water | MEM-14 (50 feet) |
| B-4 | -0.05 inches of water | B-3 (54 feet) |
| MEM-6 | 0.00 inches of water | MEM-2 (75 feet) |

Groundwater levels were recorded during this event to determine drawdown of the aquifer during this MEME. These data are detailed in Appendix A and are summarized below.

| <u>Monitoring Well</u> | <u>Maximum Change</u> | <u>Nearest Extraction Well (Approx. Distance)</u> |
|------------------------|-----------------------|---|
| MEM-11 | -0.06 | MEM-8 (37 feet) |
| B-4 | -0.05 | B-3 (54 feet) |

2.5 Groundwater Disposal

Approximately 1,456 gallons of liquid (SPH was not detected in the vacuum truck tank upon conclusion of MEME activities) were removed during this MEME and off loaded to an on-base oil/water separator at the direction of the NSA environmental personnel.

APPENDIX A
MEME FIELD DATA SHEETS

EFR[®] FIELD DATA SHEET

| Client: BAT Env. | | Facility Name: NEX (Navy Exchange) Auto Part/Fuel Lock | | | | | | | | | | | | Facility ID#: 0-791718 | | | Event #: 6 | | | | | | | |
|--|--------------------|--|---------------------|--------------------------------------|-------|-------|-------|-------|-------|-------|--------|--------|--------|------------------------|--------------------------|------------------|-----------------------|--------------------|--------------------------|-------------------------|--------------------------|-----------------------------------|-------------------------------|-----|
| Facility Address: 757 Old Navy Road, Millington, Tennessee | | | | | | | | | | | | | | | Technician: Lewis | | | Date: 4/15/99 | | | | | | |
| Extraction Well(s) | Start Time (hh:mm) | End Time (hh:mm) | Interval Time (min) | Extraction Well-head Vacuum (in. Hg) | | | | | | | | | | | Offgas Velocity (ft/min) | Total Flow (CFM) | Stack Gas Temp. (° F) | Total Flow (DSCFM) | Offgas Concentrations | | | Rate of Carbon Removal (lbs/hour) | Total Carbon Removed (pounds) | |
| | | | | Inlet | MEM-1 | MEM-2 | MEM-3 | MEM-6 | MEM-7 | MEM-8 | MEM-12 | MEM-13 | MEM-14 | B-3 | | | | | Initial PPM _v | Ending PPM _v | Average PPM _v | | | |
| MEM-2,8,13,14 | 7:00 | 7:15 | 15 | 21 | - | 18 | - | - | - | - | 10 | - | 17 | 15 | - | 2,200 | 403 | 80 | 390 | 60,000 | 58,000 | 59,000 | 258 | 64 |
| " | 7:15 | 7:30 | 15 | 21 | - | 18 | - | - | - | - | 10 | - | 17 | 15 | - | 2,200 | 403 | 100 | 377 | 58,000 | 50,000 | 54,000 | 229 | 57 |
| " | 7:30 | 7:45 | 15 | 20 | - | 17 | - | - | - | - | 11 | - | 16 | 15 | - | 2,400 | 440 | 120 | 389 | 50,000 | 40,000 | 45,000 | 197 | 49 |
| " | 7:45 | 8:00 | 15 | 19 | - | 17 | - | - | - | - | 11 | - | 16 | 14 | - | 2,600 | 477 | 140 | 383 | 40,000 | 32,000 | 36,000 | 155 | 39 |
| " | 8:00 | 8:30 | 30 | 18 | - | 15 | - | - | - | - | 11 | - | 15 | 13 | - | 2,800 | 513 | 150 | 383 | 32,000 | 20,000 | 26,000 | 112 | 56 |
| " | 8:30 | 9:00 | 30 | 17 | - | 15 | - | - | - | - | 11 | - | 15 | 13 | - | 3,000 | 550 | 150 | 411 | 20,000 | 5,400 | 12,700 | 59 | 29 |
| " | 9:00 | 9:30 | 30 | 18 | - | 16 | - | - | - | - | 11 | - | 15 | 14 | - | 3,000 | 550 | 150 | 411 | 5,400 | 3,600 | 4,500 | 21 | 10 |
| MEM-1,3,7,12 | 10:00 | 10:15 | 15 | 17 | 9 | - | 14 | - | 6 | - | 14 | - | - | - | - | 4,000 | 734 | 150 | 548 | 3,600 | 3,200 | 3,400 | 16 | 8 |
| " | 10:15 | 10:30 | 15 | 17 | 9 | - | 14 | - | 6 | - | 14 | - | - | - | - | 4,000 | 734 | 150 | 548 | 5,400 | 5,400 | 5,400 | 33 | 8 |
| " | 10:30 | 11:00 | 30 | 17 | 9 | - | 14 | - | 6 | - | 14 | - | - | - | - | 4,000 | 734 | 150 | 548 | 5,400 | 5,400 | 5,400 | 33 | 8 |
| " | 11:00 | 11:30 | 30 | 17 | 10 | - | 14 | - | 6 | - | 14 | - | - | - | - | 4,000 | 734 | 150 | 548 | 5,400 | 4,000 | 4,700 | 29 | 14 |
| " | 11:30 | 12:00 | 30 | 17 | 10 | - | 14 | - | 7 | - | 14 | - | - | - | - | 4,000 | 734 | 150 | 548 | 4,000 | 5,200 | 4,600 | 28 | 14 |
| " | 12:00 | 12:30 | 30 | 18 | 10 | - | 15 | - | 7 | - | 15 | - | - | - | - | 4,000 | 734 | 150 | 548 | 5,200 | 5,200 | 5,200 | 32 | 16 |
| " | 12:30 | 13:00 | 30 | 18 | 10 | - | 15 | - | 7 | - | 15 | - | - | - | - | 3,000 | 550 | 140 | 442 | 5,200 | 1,600 | 3,400 | 17 | 8 |
| MEM-6,B-3 | 13:00 | 13:15 | 15 | 19 | - | - | - | 18 | - | - | - | - | - | - | - | 3,000 | 550 | 140 | 442 | 1,600 | 1,800 | 1,700 | 8 | 4 |
| " | 13:15 | 13:30 | 15 | 19 | - | - | - | 18 | - | - | - | - | - | - | - | 2,700 | 495 | 145 | 384 | 120 | 200 | 160 | 0.7 | 0.2 |
| " | 13:30 | 14:00 | 30 | 19 | - | - | - | 18 | - | - | - | - | - | - | - | 2,700 | 495 | 145 | 384 | 200 | 220 | 210 | 0.9 | 0.2 |
| " | 14:00 | 14:30 | 30 | 18 | - | - | - | 18 | - | - | - | - | - | - | - | 3,200 | 587 | 150 | 438 | 220 | 480 | 350 | 1.7 | 0.9 |
| " | 14:30 | 15:00 | 30 | 18 | - | - | - | 18 | - | - | - | - | - | - | - | 3,000 | 550 | 150 | 411 | 480 | 360 | 420 | 1.9 | 1.0 |
| | | | | | | | | | | | | | | | | 3,000 | 550 | 150 | 411 | 360 | 240 | 300 | 1.4 | 0.7 |

| Vacuum Truck Information | |
|--------------------------|----------------|
| Subcontractor: | NB Env. |
| Invoice No.: | 1451 |
| Truck Operator: | Crabtree |
| Truck No.: | KingVac VK-35 |
| Vacuum Pump Type: | Liquid Ring |
| Tank Capacity: | 3,050 |
| Stack I.D. (inches): | 5.8 |
| Calibration Gas: | 500 ppm Hexane |
| Molecular Weight: | 75 g/mole |

| Well No. | Breather Port (CFM) | Stinger Depth (feet) |
|----------|---------------------|----------------------|
| MEM-1 | 0 (closed) | 10 |
| MEM-2 | 0 (closed) | 10 |
| MEM-3 | 0 (closed) | 10 |
| MEM-6 | 0 (closed) | 10 |
| MEM-7 | 0 (closed) | 10 |
| MEM-8 | 0 (closed) | 10 |
| MEM-12 | 0 (closed) | 10 |
| MEM-13 | 0 (closed) | 10 |
| MEM-14 | 0 (closed) | 10 |
| B-3 | 0 (closed) | 10 |

| Recovery/Disposal Information | |
|--------------------------------|-------|
| Total Gal. of Liquid: | 1,456 |
| Disposal Facility: | * |
| Manifest No.: | * |
| Total Lbs. of Carbon (Offgas): | 389 |
| Cum. Lbs. Carbon Removed: | 6,364 |
| Lbs. Hydrocarbons Removed: | 499 |
| Cum. Lbs. Hydrocarbons: | 8,835 |
| Equiv. Gal. Removed: | 82 |
| Cum. Equiv. Gal. Removed: | 1,457 |

Comments: * Offloaded extracted liquid to an on-site oil/water separator



EFR[®] EVENT GAUGING DATA

| Client: BAT Env. | | Facility Name: NEX (Navy Exchange) Auto Part/Fuel Lock | | | Facility ID#: 0-791718 | | Event #: 6 | | |
|--|------------------------|--|-------------------------------|-----------------------|------------------------|------------------------------|-----------------------|----------------------|-------------------------------|
| Facility Address: 757 Old Navy Road, Millington, Tennessee | | | | | Technician: Lewis | | Date: 4/15/99 | | |
| Well Designation | Well Diameter (inches) | Total Depth (feet) | Before EFR [®] Event | | | After EFR [®] Event | | | Depth to Liquid Change (feet) |
| | | | Depth to SPH (feet) | Depth to Water (feet) | SPH Thickness (feet) | Depth to SPH (feet) | Depth to Water (feet) | SPH Thickness (feet) | |
| MEM-1 | 4 | | - | 5.40 | 0.00 | - | 9.90 | 0.00 | -4.50 |
| MEM-2 | 4 | | - | 2.92 | 0.00 | - | 10.10 | 0.00 | -7.18 |
| MEM-3 | 4 | | - | 4.43 | 0.00 | - | 9.60 | 0.00 | -5.17 |
| MEM-6 | 4 | | - | 3.53 | 0.00 | - | | | |
| MEM-7 | 4 | | - | 4.16 | 0.00 | - | 9.80 | 0.00 | -5.64 |
| MEM-8 | 4 | | - | 4.74 | 0.00 | - | 10.00 | 0.00 | -5.26 |
| MEM-11 | 4 | | - | 5.49 | 0.00 | - | 5.55 | 0.00 | -0.81 |
| MEM-12 | 4 | | - | 5.00 | 0.00 | - | 11.10 | 0.00 | -5.61 |
| MEM-13 | 4 | | - | 4.38 | 0.00 | - | 11.40 | 0.00 | -6.40 |
| MEM-14 | 6 | | - | 4.58 | 0.00 | - | 10.40 | 0.00 | -6.02 |
| MEM-16 | 6 | | - | 4.73 | 0.00 | - | 4.80 | 0.00 | -0.22 |
| B-3 | 4 | | - | 4.10 | 0.00 | - | 9.70 | 0.00 | -5.12 |
| B-4 | 4 | | - | 4.65 | 0.00 | - | 4.70 | 0.00 | -0.60 |
|  | | | Comments: | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Differential Pressure and Groundwater Drawdown Data Recorded During EFR®

Event No. 6 (April 15, 1999)

NEX (Navy Exchange) Auto Part/Fuel Lock

757 Old Navy Road

Millington, Tennessee

DIFFERENTIAL PRESSURE DATA

| | | Well Designation: | | | |
|--------------------------|--------------|---|-----------|-----------|-----------|
| | | MEM-12 | MEM-3 | B-4 | MEM-6 |
| Nearest Extraction Well: | | MEM-14 | MEM-14 | B-3 | MEM-2 |
| (Approx. Distance): | | (9 feet) | (50 feet) | (54 feet) | (75 feet) |
| Time | Elapsed Time | Differential Pressure Readings (inches of water): | | | |
| 7:30 | 0.5 hr. | -0.05 | 0.00 | - | 0.00 |
| 8:00 | 1.0 hr. | -0.05 | 0.00 | - | 0.00 |
| 8:30 | 1.5 hrs. | 0.00 | 0.00 | - | 0.00 |
| 9:00 | 2.0 hrs. | 0.00 | 0.00 | - | 0.00 |
| 11:00 | 4.0 hrs. | - | - | - | 0.00 |
| 12:00 | 5.0 hrs. | - | - | - | 0.00 |
| 14:00 | 7.0 hrs. | - | - | -0.05 | - |
| Maximum Change: | | -0.05 | 0.00 | -0.05 | 0.00 |

GROUNDWATER DRAWDOWN DATA

| | | Well Designation: | |
|--------------------------|--------------|---|-----------|
| | | MEM-11 | B-4 |
| Nearest Extraction Well: | | MEM-8 | B-3 |
| (Approx. Distance): | | (37 feet) | (54 feet) |
| Time | Elapsed Time | Depth to Liquid (feet below top of casing): | |
| Prior to EFR® | | 5.49 | 4.65 |
| 14:00 | 7.0 hrs. | 5.55 | 4.70 |
| Maximum Change: | | -0.06 | -0.05 |