

Ensure Inc

ENVIRONALINE M. AND MANAGEMENT CONSULTANTS

5724 Summer Trees Drive • Memphis, Tennessee 38134 • Telephone 901-372-7962 • Facsimile 901-372-2454 • www.ensafe.com

November 16, 2000

Commander

Attn: James Reed/18812JR SOUTHNAVFACENGCOM 2155 Eagle Drive P.O. Box 190010 North Charleston, SC 29419-9010

Subject:

CTO-0146; NSA Mid-South, SWMU 3, Millington, Tennessee

Document Transmittal - Technical Memorandum - Abbreviated Work Plan - Building

N-121 Soil Sampling May 28, 1999 (Resubmittal)

Reference:

Contract N62467-89-D-0318 (CLEAN II)

Dear Sir:

This letter is provided to document resubmittal of the NSA Mid-South *Technical Memorandum* — *Abbreviated Work Plan - Building N-121 Soil Sampling*. The document has been distributed as shown on the attached NSA Mid-South RFI Distribution List.

If you have any questions or comments of a technical nature, please contact me at 901/372-7962. Comments or questions of a contractual nature should be directed to Debra Blagg at 901/386-9344.

Sincerely,

EnSafe Inc.

By.

John Stedman, Jr. Task Order Manager

Enclosures: As Stated

cc:

Contracts File: CTO-0146 (w/out enclosure)
Project File: 0146-28305 (w/out enclosure)

SOUTHDIV: Mr. Robert Rivers/Code 0233RR (w/out enclosure)

Other: See attached NSA Mid-South Distribution List

Document Title:	Technical Memorandi N-121 Soil Sampling	Technical Memorandum — Abbreviated Work Plan - Building N-121 Soil Sampling						
Document Date:	May 28, 1999	May 28, 1999						
Distribution Date:	November 16, 2000 (	(Resubmittal)						
Billing Code:	0146-001-28-305-00							
Address	Via	Distribution	Copies					
Commander Attn: James Reed SOUTHNAVFACENGCOM 2155 Eagle Drive North Charleston, SC 29418 (843) 820-5573	SuperSaver FedEx	James Reed/18812JR	1					
Commanding Officer Attn: Tonya Barker	SuperSaver FedEx	Tonya Barker	1					
Public Works Dept., Envt. Division 7800 Wasp Avenue		Rob Williamson/Randy Wilson	1					
Naval Support Activity Mid-South Millington, TN 38054-5000 (901) 874-5461		Repositories	2					
U.S. Envt. Protection Agency Waste Management Division Federal Facilities Branch								
TDEC-Division of Superfund Memphis Field Office	SuperSaver FedEx	Jim Morrison	1					
Attn: Jim Morrison Suite E-645, Perimeter Park 2500 Mt. Moriah Memphis, TN 38115-1511 (901) 368-7958								
TDEC- Division of Solid Waste Managemen Attn: Clayton Bullington 4th Floor, L & C Annex 401 Church Street Nashville, TN 37243-1538 (615) 741-5940	nt SuperSaver FedEx	Clayton Bullington	1					
U.S. Geological Survey Water Resources Division Attn: Jack Carmichael 640 Grassmere Park, Suite 100 Nashville, TN 37211 (615) 837-4704	SuperSaver FedEx	Jack Carmichael	1					
Memphis and Shelby Co. Health Dept. Attn: Brenda Duggar 814 Jefferson Avenue Memphis, TN 38105	SuperSaver FedX	Brenda Duggar (bound copy)						

NSA Mid-South INTERNAL RFI Distribution List							
Document Title:	Technical Memorandum — Abbreviated Work Plan - Building N-121 Soil Sampling						
Document Date:	May 28, 1999						
Distribution Date:	November 16, 2000 (Resubmittal)						
Name	Document, Letter, & Distribution List	Distribution List & Letter Only					
Lawson Anderson	1	·					
Phil Atkinson	1 .						
John Stedman	2						
Greg Pierce							
Ben Brantley							
Elaine Newbaker							
Debra Blagg		1					
Administrative Record (Final versions only; route to Sandra Maclin)							
Project File		1					
LIBRARY	1						
Internal Total	5	2					
TOTAL PRODUCTION	13	2					



ENSAFE INC.

5724 Summer Trees Drive • Memphis, Tennessee 38134 • Telephone 901-372-7962 • Facsimile 901-372-2454 • www.ensafe.com

May 28, 1999

Commanding Officer
Attn: Mark Taylor/1861MT
SOUTHNAVFACENGCOM
2155 Eagle Drive
P.O. Box 190010
North Charleston, SC 29419-9010

Subject:

CTO-0094; NSA Mid-South RCRA Facility Investigation, Millington, Tennessee

Document Transmittal - Abbreviated Work Plan - Building N-121 Soil Sampling; Rev: 0,

May 28, 1999

Reference:

Contract N62467-89-D-0318 (CLEAN II)

Dear Sir:

Please find enclosed one copy of the NSA Mid-South Abbreviated Work Plan - Building N-121 Soil Sampling; Rev: 0. The document has been submitted to the entire BRAC Cleanup Team concurrently to expedite the review process. As requested, copies have been distributed as shown on the attached NSA Memphis RFI Distribution List.

If you have questions or comments of a technical nature, please contact me at 901/372-7962. Comments or questions of a contractual nature should be directed to Debra Blagg at 901/386-9344.

Sincerely,

EnSafe Inc.

By: Robert P. Smith, CHMM

Task Order Manager

Enclosures: As Stated

cc:

Contracts File: CTO-0094 (w/out enclosure)

Project File: 0094-00

0094-001-29-000-00 (w/out enclosure)

SOUTHDIV: Ms. Kim Reavis/Code 0233KR (w/out enclosure)

Other: See attached NSA Mid-South Distribution List

<b>Document Title:</b>	Abbreviated Work P	Abbreviated Work Plan - Building N-121 Soil Sampling; Rev: 0					
Document Date:	May 28, 1999	May 28, 1999					
Distribution Date:	May 28, 1999						
Billing Code:	0094-001-29-000-00	(Shipping of documents to charged to overhead)	SOUTHDIV should be				
Address	Via	Distribution	Copies				
Commanding Officer Attn: Mark Taylor/1861MT SOUTHNAVFACENGCOM 2155 Eagle Drive North Charleston, SC 29418 (803) 820-5573	SuperSaver FedX	Mark Taylor/1872MT  David Porter/1882DP	1				
Commanding Officer Attn: Rob Williamson	SuperSaver FedX	Tonya Barker	4				
Public Works Office, Envt. Division Building S-241 Naval Support Activity Memphis		Rob Williamson					
Millington, TN 38054-5000 (901) 874-5461		Repositories					
U.S. Envt. Protection Agency Attn: Brian Donaldson Waste Management Division Federal Facilities Branch 100 Alabama Street, SW Atlanta, GA 30303 (404) 562-8554	SuperSaver FedX	Brian Donaldson	1				
TDEC-Division of Superfund Memphis Field Office Attn: Jim Morrison Suite E-645, Perimeter Park 2500 Mt. Moriah Memphis, TN 38115-1511 (901) 368-7958	SuperSaver FedX	Jim Morrison	1				
TDEC- Division of Superfund Attn: Clayton Bullington 5th Floor, L & C Annex 401 Church Street Nashville, TN 37243-1538 (615) 532-0895	SuperSaver FedX	Clayton Bullington	1				
U.S. Geological Survey	SuperSaver FedX	Jack Carmichael	1				
Water Resources Division Attn: Jack Carmichael 640 Grassmere Park, Suite 100 Nashville, TN 37211 (615) 837-4704		0.000.000					



#### ENSAFE INC.

5724 Summer Trees Drive • Memphis, Tennessee 38134 • Telephone 901-372-7962 • Facsimile 901-372-2454 • www.ensafe.com

#### **Technical Memorandum**

To:

**NSA Mid-South BRAC Cleanup Team** 

From:

Robert Smith, EnSafe Inc.

Date:

May 28, 1999

RE:

Abbreviated Work Plan - Building N-121 Soil Sampling

This abbreviated work plan addresses the soil sampling which will be conducted at Building N-121 as part of the building demolition. Due to the past operations conducted in this building (former plating shop), the BRAC Cleanup Team (BCT) determined that additional soil samples are needed from beneath the existing slab/building foundation.

The objective of this sampling event is to determine if the soil beneath the slab has been impacted and to determine if any release which may have occurred poses a threat (acute or chronic) to human health and/or the environment, primarily the workers involved in the site work at Building N-121.

#### **Site Description**

Building N-121 is located in the northern portion of NSA Mid-South (Attachment A) and was formerly operated as a plating shop. It is located approximately 100 feet west of Memphis Avenue (formerly Eighth Street) on the north side of Casablanca Street, and is a 4,343 square foot structure which is currently not in use.

#### **Previous Investigations**

The Building N-121 area has been the subject of three previous environmental actions associated with the former operations performed in the building.

RCRA Facility Investigation (SWMU 3 RCRA Facility Investigation Report; EnSafe/Allen and Hoshall, April 15, 1996)

The dry well associated with Building N-121 was investigated during the Assembly A RCRA Facility Investigation, with the results and findings presented in the SWMU 3 RCRA Facility Investigation Report (EnSafe/Allen & Hoshall, April 15, 1996). Based on the information contained in this report, no further action was recommended and approved by both the U.S. Environmental Protection Agency (USEPA) and the Tennessee Department of Environment and Conservation (TDEC).

Voluntary Corrective Action (Voluntary Corrective Action Report - SWMU 3, 7, 17, 18, 19, 67, and Gasoline Pits, Rev. 02; EnSafe, May 1999)

As part of the U.S. Navy's Installation Restoration Program, a Voluntary Corrective Action was conducted to remove the dry well associated with the plating operations at Building N-121. In 1997, the dry well was excavated, all material removed (gravel), and the area was backfilled with pea gravel and capped with concrete. Confirmation samples were collected from the floor and sidewalls of the excavation area to confirm that all impacted soil had been removed. Based on the information presented in the SWMU 3 Voluntary Corrective Action Report (EnSafe, 1999), no further action was recommended and approved by both the USEPA and TDEC.

Spill Response and Soil Removal (Building N-121 Soil Removal and Spill Cleanup Activity Report, Rev.: 02; EnSafe, August 1997)

In February 1997, liquid contained in a vat labeled 'Chromic Acid' was spilled on the ground outside the west end of Building N-121. Subsequently, impacted soil was removed and confirmation samples were collected. Based on the information presented in the Building N-121 Spill Report (EnSafe/Allen & Hoshall, 1997), no further action was recommended and approved by both the USEPA and TDEC.

#### **Source Characterization**

In February 1999, at the recommendation of the NSA Mid-South Public Works Department, Environmental Division (PWD-Env. Div), and in preparation for the building demolition, additional samples were collected from the interior of Building N-121. Wipe samples were collected from the surfaces of the interior walls and the fume hoods, as well as samples of the concrete lining the sumps in the middle of the building. The sample results indicated elevated levels of cadmium in the concrete from the plating room catch basin and elevated levels of cadmium, chromium, and lead in wipe samples collected from various locations throughout the building. Attachment B contains the analytical data generated during the recent sampling events.

#### **Additional Sampling**

At the request of the NSA Mid-South PWD-Env. Div., and the Southern Division of the Naval Facilities Engineering Command (SOUTHNAVFACENGCOM), additional samples will be collected from beneath the foundation of the building after the demolition of the building is completed to ensure the safety of the demolition contractor, and to confirm that no release of hazardous material to the environment has occurred. Suspect areas will be marked on the attached map prior to the demolition, using the procedures outlined below, to ensure that these areas will be able to be located after the building (and all reference points) are removed. In addition to the samples from the suspect areas, any areas exhibiting stained soil, unusual odors, or conditions that would otherwise indicate a release may have occurred will be sampled.

#### Sample Locations

Using the attached map (Attachment A), suspect areas will be referenced to the three groundwater monitoring wells located around the site. In addition to the monitoring wells, reference points will

be established on the concrete pad (former drywell) and any existing utility poles (if necessary). All reference points will be established after the building has been demolished, but prior to the removal of the building slab.

Suspect areas will be related to areas such as the bottom of the trenches existing in the building, cracks in the concrete flooring, and near or around floor drains and/or sumps. These are areas where a release is most likely to have occurred. Currently, the trenches and sumps contain sand which was placed there as a safety precaution. Any cracks or other breached areas will be identified after the sand is removed.

### Soil Sampling Methodology

All soil samples will be collected in accordance with the NAS Memphis Comprehensive RCRA Facility Investigation Work Plan (EnSafe/Allen & Hoshall, 1994). Samples will be collected from 0 to 6-inches using stainless steel or disposable plastic (laboratory grade) spoons and placed in precleaned sample jars of the appropriate size and type (to be supplied by the laboratory). One deviation from the above referenced comprehensive work plan is that samples collected for volatile organic compound analysis will be collected using EPA Method 5035.

#### Analytical Methods

Samples will be submitted to an offsite laboratory for both volatile organic compound and metals analyses (Table 1). The exact number of samples will be determined in the field, based on site conditions and field observations.


# Table 1 Analytical Requirements Building N-121 Demolition

Analytical Method	Rationale	QC Level/Rationale		
Volatile Organic Compounds (EPA Method 5035)	Possible presence of chlorinated solvents due to past use as a degreasing agent in the plating shop	II/Screening level data to determine if a release of VOCs has occurred.		
Appendix IX Metals (EPA Method 6010/7000 series)	Possible presence of heavy metals as a by-product of the plating operations	II/Screening level data to determine if a release of metals has occurred.		

#### **Documentation**

EnSafe will generate a Technical Memorandum outlining the sample results, and the applicable action levels, and submit it to the NSA Mid-South BRAC Cleanup Team for review.

Attachment A
Building N-121
Site Map/Sample Locating Grid

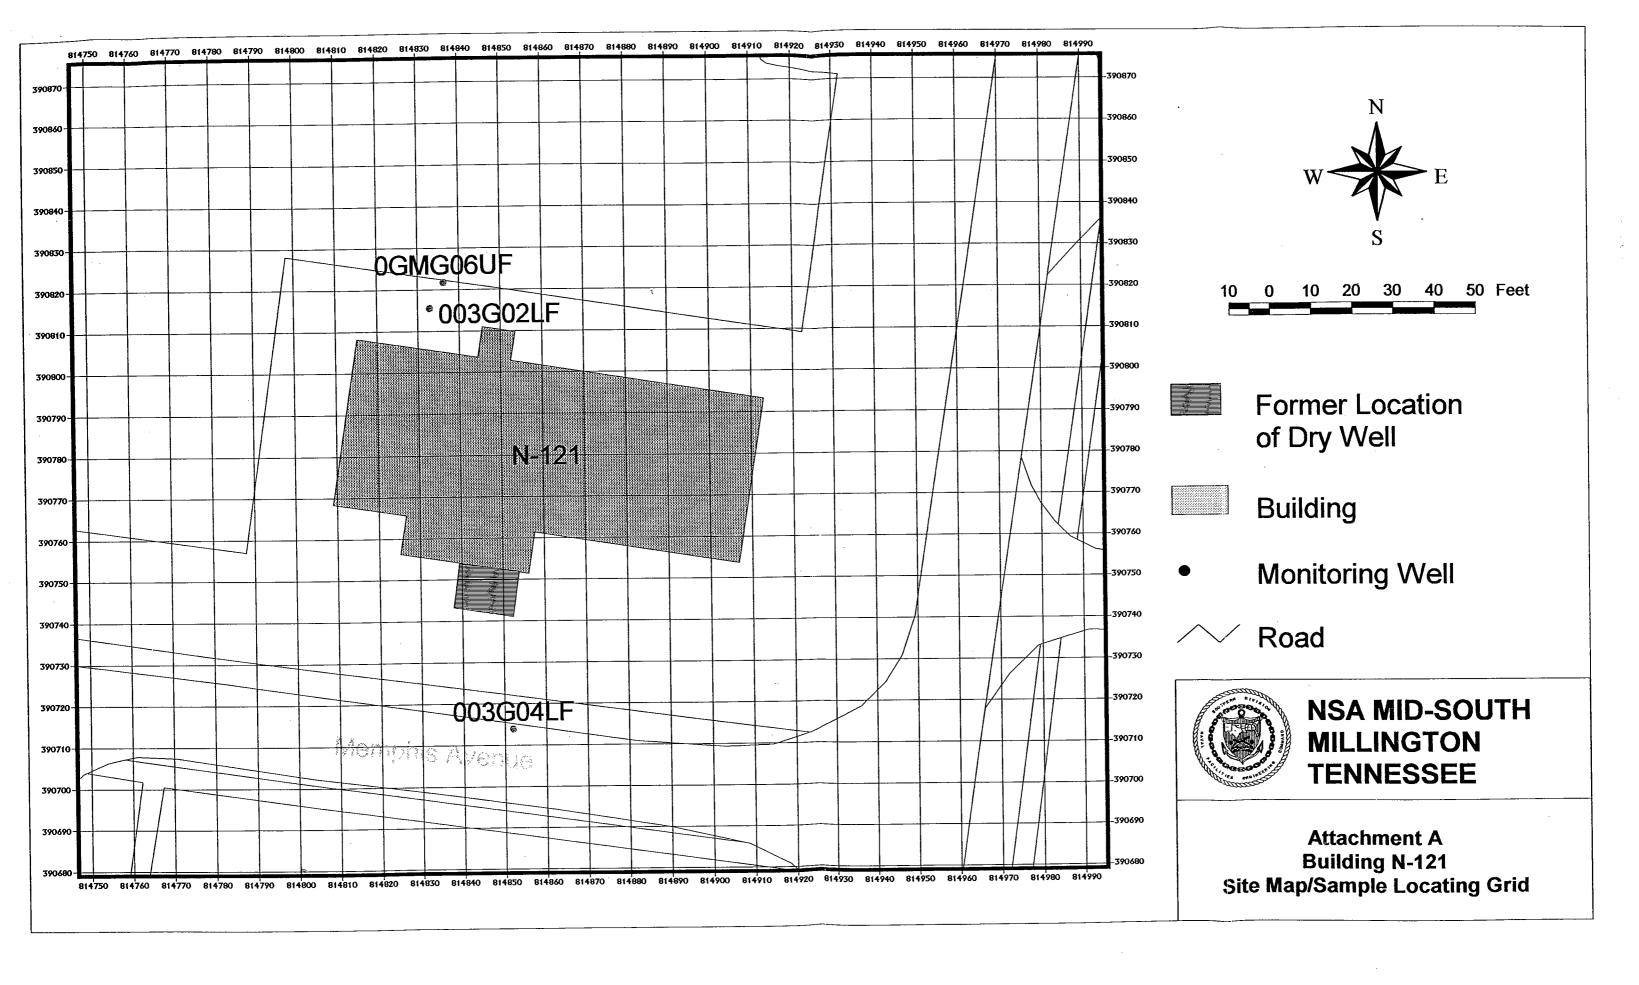

Attachment B
Building -121
Wipe Samples Analytical Data

### 3.11 **Building N-121**

# Asbestos-Containing Material Survey for Building N-121

Building N-121 consists of a one-story building, constructed in 1943. This 4,343 square foot metal hangar was previously used as a plating shop. The space is largely open with one room that was used for plating. The catch basins located within the plating room have been filled with sand. Four exhaust hood ducts remain in this room. Small concrete block storage sheds are located on two sides of the building. A total of 12 bulk samples were collected from 4 distinct suspect-ACM homogeneous areas (HA's) identified on the interior and exterior of the building. 2 HA's consisted of one or more layers containing greater than 1% asbestos. The following table presents a summary of ACM identified:

	Material Description	Approximate Location	NESHAP Category	OSHA	Approx.
1	Caulking on exhaust duct	Exhaust hood	RACM	Class II	50 LF
2	Interior window putty	All windows	RACM	Class II	550 LF

# Preliminary Wastestream Characterization for Building N-121

- Description: Building N-121 consists of a one-story building, constructed in 1943. This 4,343 square foot metal hangar was previously used as a plating shop. The space is largely open with one room that was used for plating. The catch basins located within the plating room have been filled with sand. Four exhaust hood ducts remain in this room. Small concrete block storage sheds are located on two sides of the building.
- XRF Testing: A total of 34 XRF readings were obtained from the major components identified in this building. LBP was identified on the wooden support beams of both storage sheds. Yellow safety paint (LBP) was identified within the building. No metal components painted with LBP were identified.
- Lead TCLP Results: Two representative composite samples were collected for TCLP analysis. Two additional TCLP samples, three paint chip samples, and six wipe samples were also collected. The following table contains only the lead TCLP results. Results and conclusions for the additional samples can be found on the following pages.

Sample ID	Sample Description	Lead TCLP Results (mg/L)
NSAM-N121-TCLP-26 (analyzed for RCRA metals)	Representative composite sample composed of 20 cores collected from various building components: 6 interior walls, 4 exterior walls, 4 floors, and 4 ceilings, 1 door and 1 window.	<0.5
NSAM-N121-TCLP-33 (analyzed for lead only)	Representative composite sample composed of 20 cores collected from various building components: 6 interior walls, 4 exterior walls, 4 floors, and 4 ceilings, 1 door and 1 window.	<0.5
	Mean	0.5
	Standard Deviation	0.1
	80% Upper Confidence Limit	0.6

 Conclusions: These TCLP test results suggest that the anticipated wastestream generated from the demolition of this building would be characterized as a nonhazardous solid waste.

# Additional TCLP Sample Results

		Multi-elemen	
Sample ID	Sample Description	Results (m	
		Silver	<0.5
	Representative composite sample	Arsenic	<0.5
	composed of 20 cores collected from	Barium	<10.0
NSAM-N121-TCLP-26	various building components: 6	Cadmium	<0.1
11022111122	interior walls, 4 exterior walls, 4	Chromium	<0.5
	floors, and 4 ceilings, 1 door and 1	Lead	<0.5
	window.	Selenium	<0.1
		Mercury	<0.02
		Silver	<0.5
		Arsenic	<0.5
		Barium	<10.0
NSAM-N121-TCLP-27	Black stained concrete near storage	Cadmium	<0.1
	shed.	Chromium	<0.5
		Lead	<0.5
		Selenium	<0.1
		Mercury	<0.02
		Silver	<0.5
		Arsenic	<0.5
	1	Barium	<10.0
NSAM-N121-TCLP-28	Sand from plating room catch basin.	Cadmium	< 0.1
NDAMI-NIZI TOZI 25		Chromium	<0.5
		Lead	<0.5
		Selenium	<0.1
		Mercury	<0.02
		Silver	<0.5
		Arsenic	<0.5
		Barium	<10.0
NSAM-N121-TCLP-34	Concrete from plating room catch	Cadmium **	0.9
MOMM-MILLION ST	basin.	Chromium	<0.5
		Lead	<0.5
		Selenium	<0.1
		Мегсигу	<0.02

Conclusions for Multi-Element TCLP Results: These results suggest that the materials sampled would be determined to be non-hazardous solid wastes with respect to the eight RCRA metals. Note that the concrete from the catch basin (sample # 34) contained a level of cadmium, which approaches the regulatory threshold of 1.0 mg/L. This sample was collected from the upper surface of the catch basin without excavating the sand filler. It is possible that higher concentrations of metals might exist in the concrete under the sand filler.

# Paint Chip Sample Results

### Total RCRA Metals (mg/kg)

Sample ID	Sample Description	As	Ba	Cd	Cr	Hg	Pb	Se	Ag
NSAM- N121-Paint-1	Composite sample of interior wall paint from the plating room.	< 8	4,900	28	944	< 0.01	18,200	< 5	3
NSAM- N121-Paint-2	Composite sample of interior wall paint from room adjacent to plating	< 8	965	9	645	< 0.01	3,740	< 5	<2
NSAM- N121-Paint-3	Exterior LBP found on wood beams of the exterior storage sheds.	< 8	140	11	297	< 0.01	29,900	< 5	< 2

• Conclusions: These results reveal the presence of lead, cadmium, chromium, and barium in or on the paint in the plating room. If the lead based paint at this facility is scheduled for removal prior to demolition, the client should be aware of possible exposure risks associated with lead, cadmium, chromium, and barium.

### Wipe Sample Results

## Total RCRA Metals (µg/ft²)

Sample ID	Sample Description	As	Ba	Cd	Cr	112	Pb	Se	Ag
NSAM- N121-Wipe-1	Wipe sample from exterior of exhaust hood #1. (100 cm <sup>2</sup> )	< 14	14	< 2	1,100	2.9	400	< 9	< 3
NSAM- N121-Wipe-2	Wipe sample from the interior of exhaust hood #1. (100 cm <sup>2</sup> )	17	27	68	24,700	1.7	2,800	< 9	5
NSAM- N121-Wipe-3	Wipe sample from the interior of exhaust hood # 2. (100 cm <sup>2</sup> )	< 14	632	1,300	7,920	3.6	2,660	< 9	12
NSAM- N121-Wipe-4	Wipe sample from the exterior top of exhaust hood #3. (100 cm <sup>2</sup> )	<14	682	360	2,450	1.9	2,350	< 9	6
NSAM- N121-Wipe-5	Field blank	< 14	12	< 2	11	< 0.5	18	< 9	< 3
NSAM- N121-Wipe-6	Field blank	< 14	12	< 2	< 4	0.5	16	< 9	< 3

Conclusions: These results reveal the presence of barium, cadmium, chromium, and lead on the interior and exterior surfaces of the exhaust hoods. This data should be used for decisions regarding the disposal, decontamination, or recycling of the exhaust hoods.