

N83447.AR.000073
NAS FORT WORTH
5090.3a

RCRA PERMIT PART B NUMBER HW50289 RCRA FACILITY INVESTIGATION
REMEDATION REQUEST FOR DISMISSAL SOLID WASTE MANAGEMENT UNIT 18 AND 63
NAS FORT WORTH TX
7/25/1991
ARMY CORP OF ENGINEERS



**NAVAL AIR STATION
FORT WORTH JRB
CARSWELL FIELD
TEXAS**

**ADMINISTRATIVE RECORD
COVER SHEET**

AR File Number 83

CARSWELL AIR FORCE BASE, TEXAS
RCRA Permit, Part B, Number HW50289

831

REQUEST FOR DISMISSAL

**SWMU NO. 18, FIRE DEPARTMENT
TRAINING AREA NO.1
SWMU NO. 63, ENTOMOLOGY DRY
WELL**

25 July 1991

Prepared by
**U.S. Army Corps of Engineers
Fort Worth District**

TABLE OF FIGURES

ITEM	FIGURE NUMBER
SWMU Locations	1
SWMU No. 18, Site Map, Boring Locations	2
SWMU No. 63, Site Map	3
SWMU No. 63, Boring Locations	4

10/1/2010 10:10:10 AM

LIST OF TABLES

ITEM	TABLE NUMBER
General Specifications For Monitor Wells	1
Analytical Schedule For Groundwater Samples	2
Analytical Schedule For Soil Samples	3
Upper Zone Monitor Well Construction Specifications	4
Results of Inorganic Analyses For Water Samples, SWMU 18	A-1
Results of Inorganic Analyses For Water Samples, SWMU 18	A-2
Results of Organic Analyses For Water Samples, SWMU 18	A-3
Results of Organic Analyses For Water Samples, SWMU 18	A-4
Results of Organic Analyses For Water Samples, SWMU 18	A-5
Results of Organic Analyses For Water Samples, SWMU 18	A-6
Results of Organic Analyses For Water Samples, SWMU 18	A-7
Results of Field Analyses For Water Samples, SWMU 18	A-8
Results of Soil Sample Analysis, SWMU 18	A-9
Results of Organic Analyses For Soil Samples, SWMU 63	A-10
Results of Organic Analyses For Soil Samples, SWMU 63	A-11
Results of Groundwater Sample Analysis, SWMU 63	A-12

1.0 **PURPOSE:** This Request for Dismissal is prepared for Solid Waste Management Unit (SWMU) No. 18, Fire Department Training Area No. 1 and SWMU No. 63, Entomology Dry Well in response to the RCRA Permit, Part B, Number HW50289, issued to Carswell Air Force Base (CAFB) by the Texas Water Commission (TWC), dated 7 February 1991.

2.0 **BACKGROUND:** The RCRA permit issued to CAFB has identified 20 SWMU's that require facility investigations in order to determine whether hazardous constituents listed in Title 40, Code of Federal Regulations (40 CFR) Part 264, Appendix IX have been released into the environment. Under the Air Force's Installation Restoration Program (IRP), remedial investigations have already been conducted at SWMU No's 18 and 63 and there are no confirmed releases or the releases have already been remediated. Per paragraph VIII.A.3 of the permit, these SWMU's are being requested exempt from the RCRA facility investigations required in paragraph VIII of the permit.

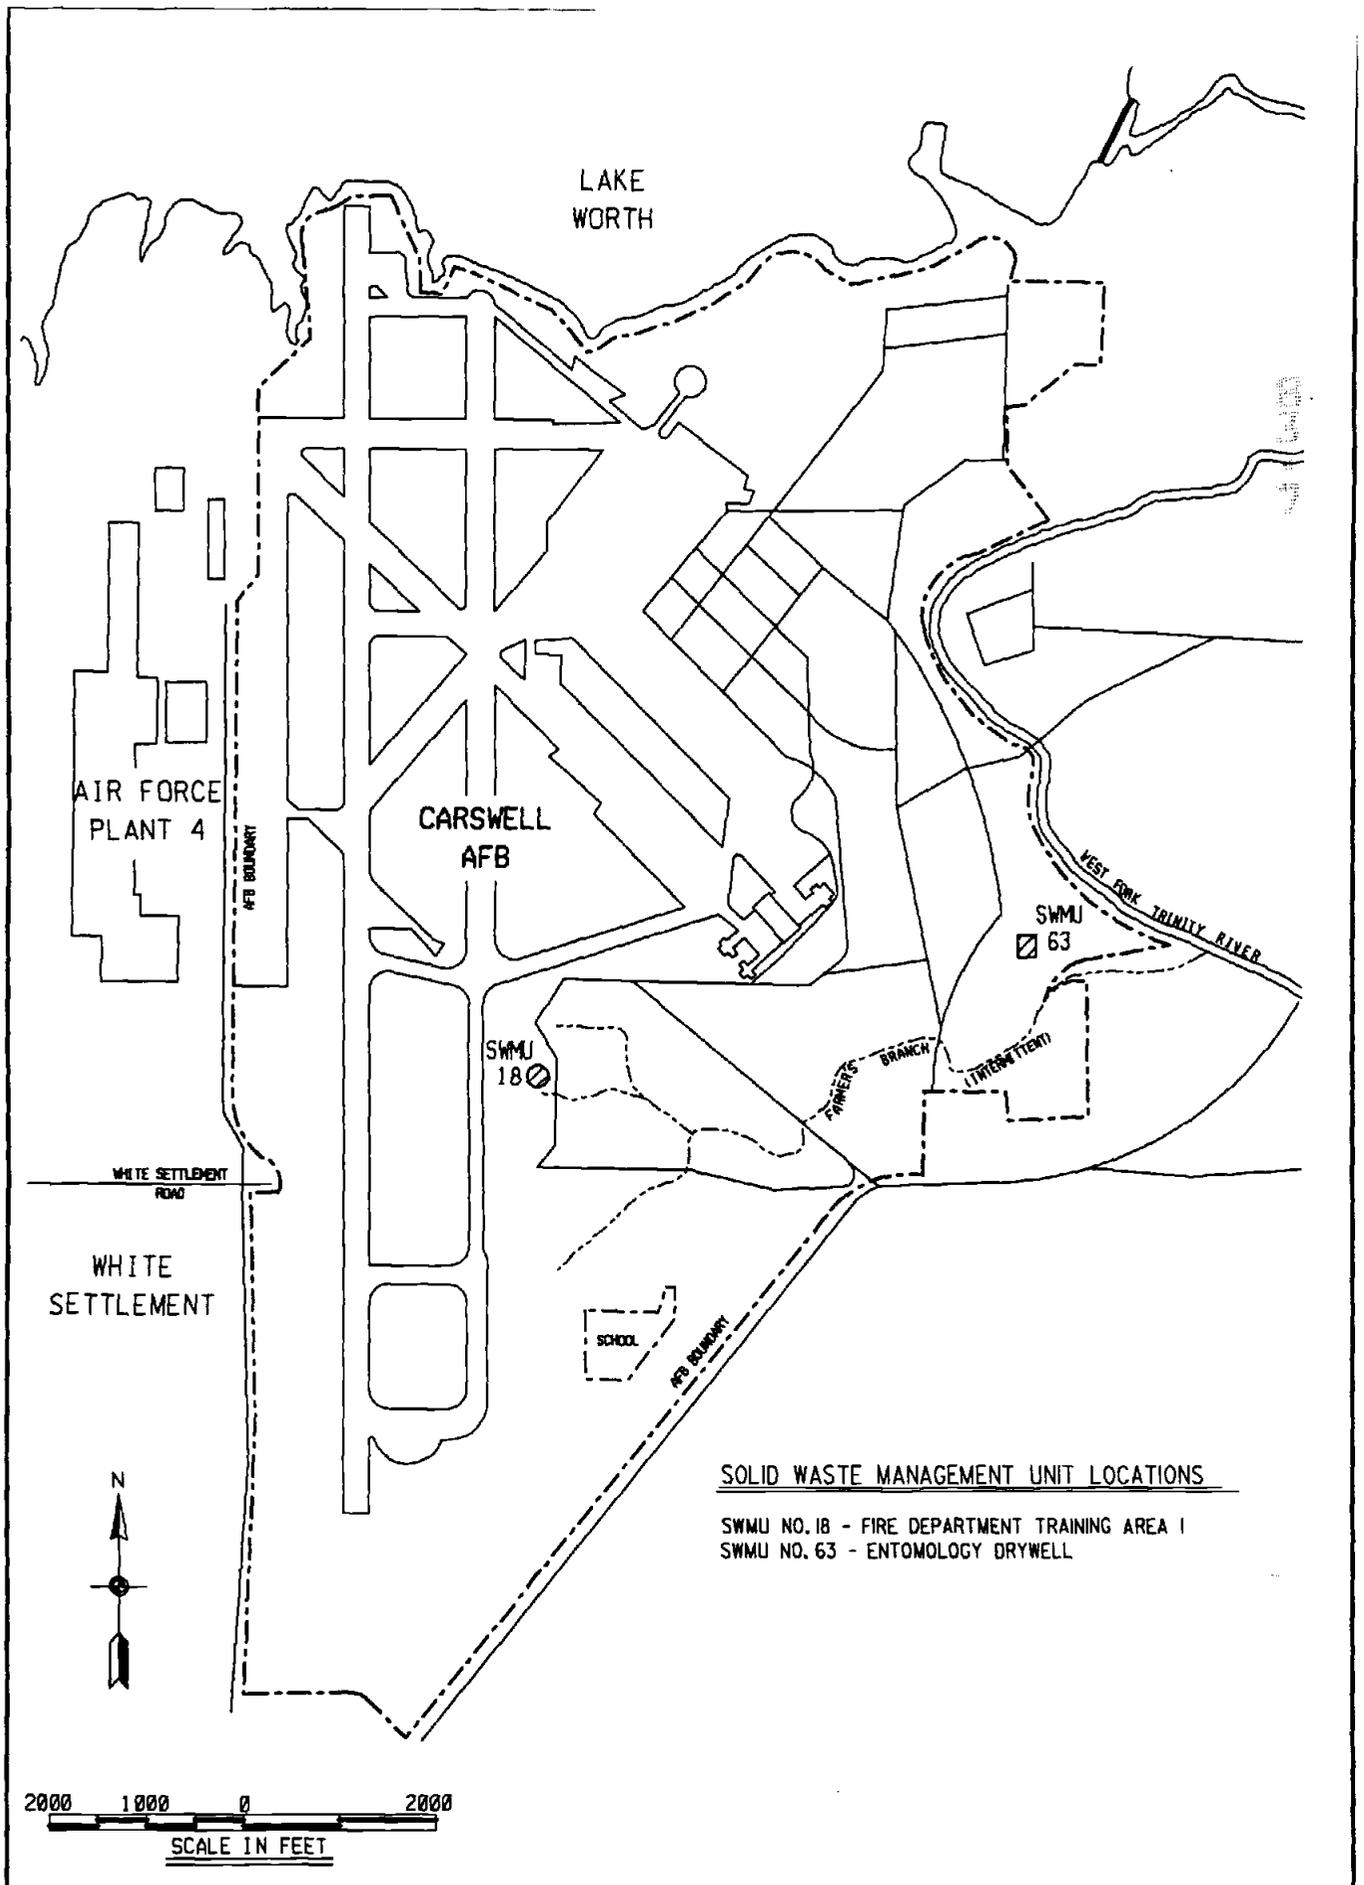
3.0 **SITE DESCRIPTIONS**

3.1 SWMU No. 18, Fire Department Training Area No. 1


SWMU No. 18 is located in the southern part of CAFB just west of Cody Drive and north of White Settlement Road (Figure 2). This training area was probably the primary fire training pit prior to 1963. The pit was reportedly gravel lined and surrounded by a low concrete curb. Fire training exercises were reported to have been conducted several times each month. Waste oils and contaminated fuels were the primary flammable liquids used in the exercises, though small quantities of solvents are also suspected of having been burned. The site now consists of a level, gravel surfaced area on a drainage divide between an unnamed tributary of Farmers Branch and Farmers Branch.

3.2 SWMU No. 63, Entomology Dry Well

The entomology dry well was located immediately west of the entomology



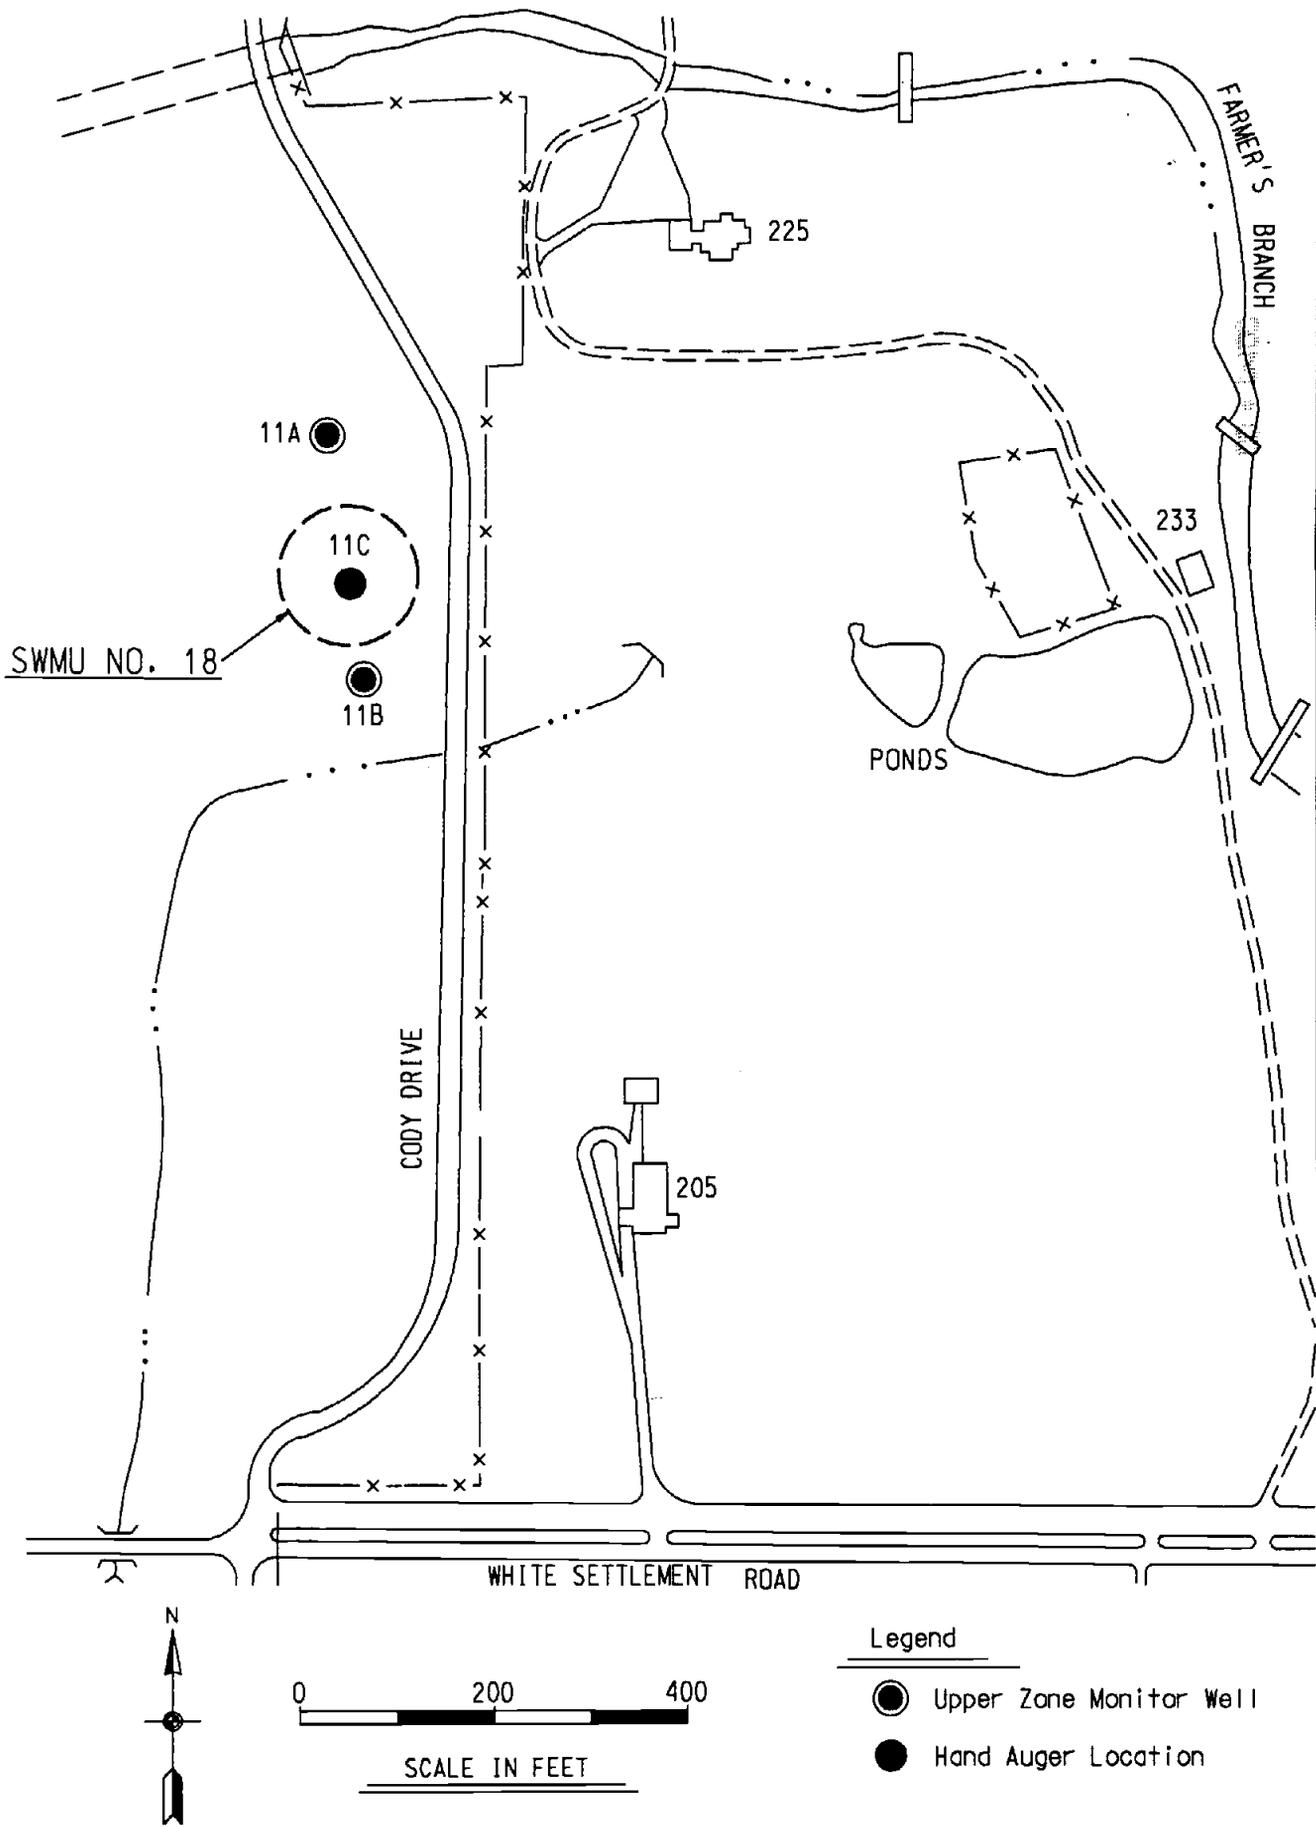CARSWELL AIR FORCE BASE, TEXAS
 FIGURE 1



SITE MAP, BORING LOCATIONS
SWMU NO. 18, FIRE DEPARTMENT TRAINING AREA NO. 1
FIGURE 2

shed, Building 1338 (Figure 3). The entomology shed has since been removed and now the site occupies a graded, partially paved lot in the vicinity of the communications building, Building 1337. Building 1338 was used for the storage and cleaning of entomology spray equipment. Insecticides known to have been stored in Building 1338 include malathion, diazinon, dursban and chlordane. The Entomology Dry Well was used for the disposal of insecticide rinsate between 1965 and 1981.

4.0 SITE INVESTIGATIONS

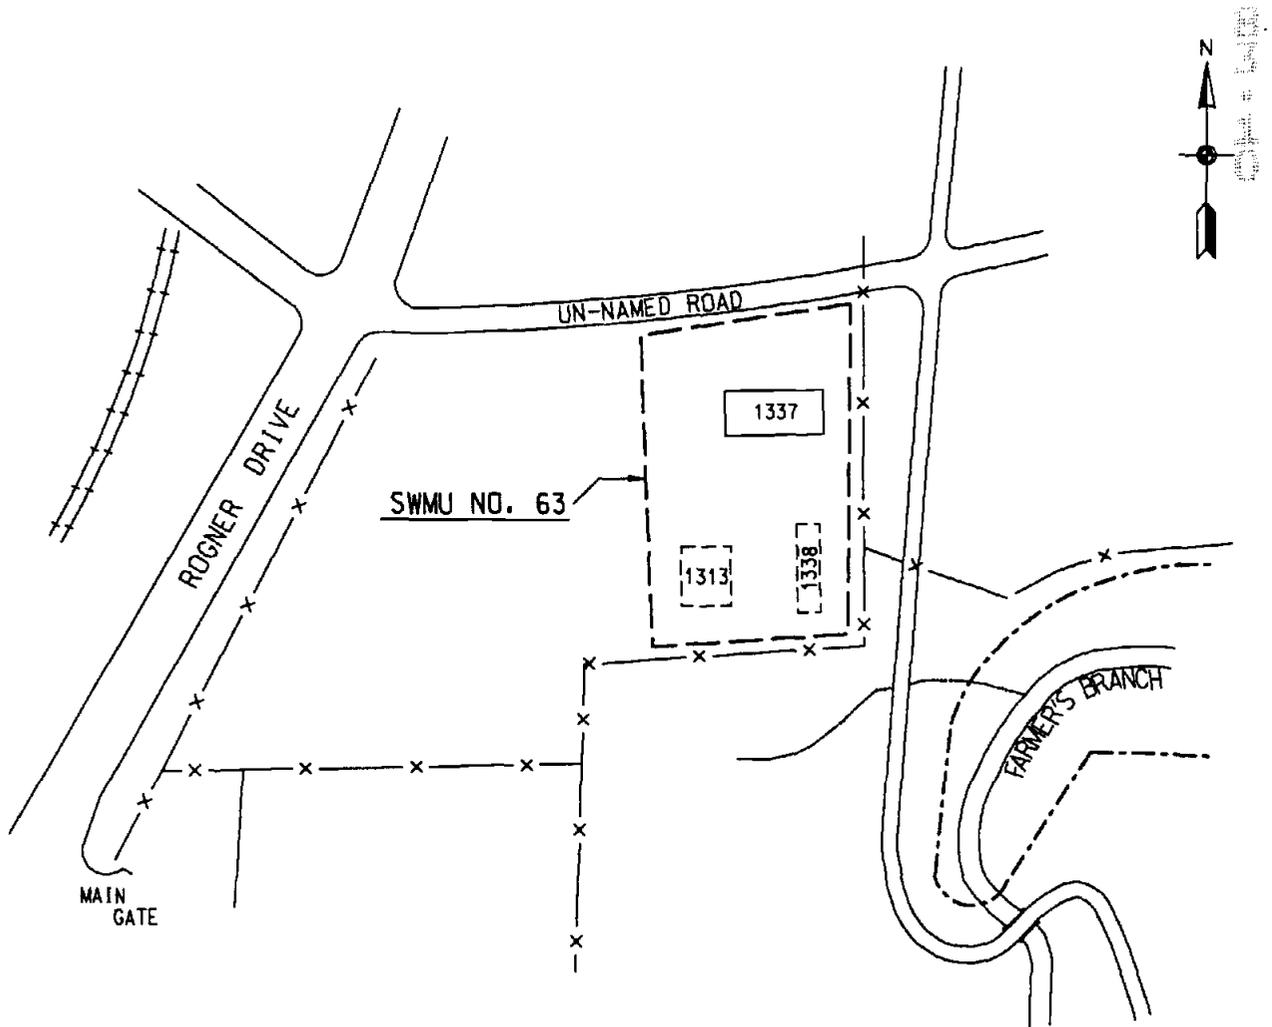
The field program at Carswell AFB consisted of geophysical surveying, installation of upper zone monitor wells, and sampling of soil and groundwater. The content of the field program is presented in narrative form in the following subsections. For each of the sites that were investigated, a similar sequence of events was followed.

4.1 Fire Department Training Area No. 1, SWMU 18

Work at SWMU 18 included the installation of two upperzone monitor wells and a hand augered soil boring at the center of the site. Figure 2 shows the locations of the monitor wells and the soil boring. Other work included the performance of electromagnetic profiles, vertical electrical soundings, and magnetometer surveys and is discussed in paragraphs 4.3 through 4.3.3.

4.1.1 Monitor Wells

Two monitor wells were installed at the Fire Department Training Area 1. The locations of the wells were selected both in view of the impact of individual sites on the upper zone groundwater and the aggregate impact of the sites on the groundwater. Because there were no groundwater quality or groundwater flow data, the primary criterion for the location of the wells was topographic setting relative to the fire training area. For upgradient wells ("A" series), the location was selected upslope from the training area. The downgradient well was located downslope and as near as practicable to the limits of the training area.



SITE MAP
SWMU NO. 63, ENTOMOLOGY DRY WELL
FIGURE 3

All upper zone monitor wells were drilled to the base of the upper zone, or until at least 10 feet of saturated material suitable for well construction was encountered. General specifications for monitor wells installed near the flightline area are provided in Table 1.

**TABLE 1
GENERAL SPECIFICATIONS FOR MONITOR WELLS
CARSWELL AFB, TEXAS**

Monitor Well	Measuring Point Elevation ¹	Ground Level Elevation ²	Screened Interval ³	Screen Elevations ²	Total Depth ³
11A	608.25	604.75	4-14	600.75-590.75	14.5
11B	608.11	603.56	3.5-13.5	600.06-590.06	15
15A	570.24	570.62	2.5-12.5	568.12-558.12	12.74
15B	568.09	564.14	2-7	562.14-557.14	7.43
15C	567.87	564.17	5.5-10.5	558.67-553.67	10.66

¹Top of PVC for monitor wells.

²Feet, msl to nearest 0.01 foot (Reference Datum = floor of Bldg. 1215).

³Feet below ground level.

4.1.2 Monitor Well Sampling

After the completion and initial development of the monitor wells, each one was purged and sampled. Field sampling was conducted by Radian personnel during February and March 1988. The groundwater samples were analyzed for the parameters as shown in Table 2. Results of the groundwater analyses are provided in Section 5.0.

**TABLE 2
ANALYTICAL SCHEDULE FOR GROUNDWATER SAMPLES
CARSWELL AFB, TEXAS**

Site	Parameter						
	TOC	TOX	Oil & Grease	Pesti- cides	Phenols	Heavy Metals	Purgeable Organics
Fire Training Area 1 (18)	X	X	X	X	X	X	X
Entomology Bldg (63)	X			X			

4.1.3 Soil Sampling

In addition to monitor well sampling, soil samples were collected for analysis. Location of the hand-auger sampling point is shown on Figure 2. The auger, with extensions, was able to retrieve soil samples at a depth of 10 feet below the land surface. The sampling technique involved augering to the desired depth, cleaning the auger with water and acetone, retrieving a sample with the auger, and then continuing with the auger to the next sample depth. At the surface, each sample was placed in a quart mason jar with a Teflon-lined lid and frozen for shipment to the laboratory. Soils were analyzed for parameters listed in Table 3.

**TABLE 3
ANALYTICAL SCHEDULE FOR SOIL SAMPLES**



Site	Parameters				
	Oil & Grease	Pesticides	Phenols	Heavy Metals	Purgeable Organics
Fire Training Area 1 (18) Entomology Building (63)	X	X	X	X	X

4.2 Entomology Dry Well, SWMU 63

Work at SWMU 63 included installation of three upper zone monitor wells and conducting 7 shallow soil borings. Figure 4 shows the locations of the monitor wells and soil borings. Work also included the performance of electromagnetic profiles, vertical electrical soundings, and magnetometer surveys and is discussed in paragraphs 4.3 through 4.3.3.

4.2.1 Monitor Well Installation and Borehole Drilling

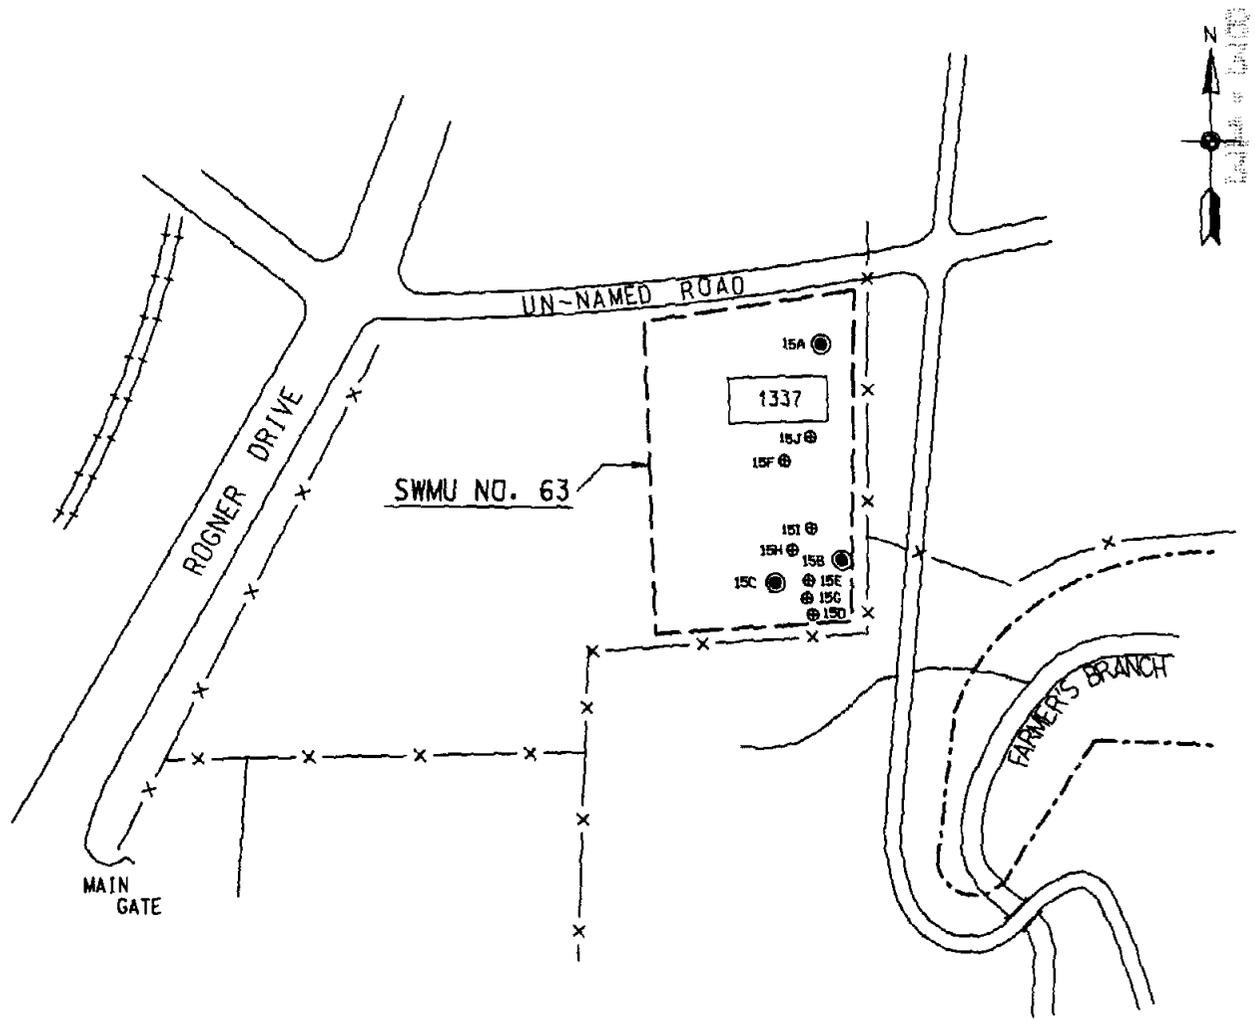A total of three upper zone monitor wells were installed at SWMU 63. The locations of the wells and borings were considered in view of the impact of individual sites on the upper zone groundwater. There were no groundwater quality or flow data available to aid in the selection of well locations. The primary criterion for the location of the wells was topographic setting relative



LEGEND

- 15A ● Monitor Well Location
- 150 ⊕ Hand Auger Locations

BORING LOCATIONS
SWMU NO. 63, ENTOMOLOGY DRY WELL
FIGURE 4

to the waste disposal area to be monitored. For upgradient wells ("A" series), the locations were selected upslope from the disposal sites. Downgradient wells were located downslope and as near as practicable to the limits of the waste disposal areas. All upper zone monitor wells were drilled to the base of the upper zone, or until at least 10 feet of saturated zone was encountered. General specifications for monitor wells completed are provided in Table 1.

After the completion of the monitor wells, samples of groundwater were collected from each of the newly-installed wells. A second set of samples was collected approximately one month after the collection of the first set. Soil samples were collected from wells and borings as drilling progressed.

4.2.2 Sampling Activities

After the completion and initial development of the monitor wells, each one was purged and sampled. Field sampling was conducted by Radian personnel during February and March 1985. The groundwater samples were analyzed for the parameters as shown in Table 2. Results of the groundwater testing are provided in Appendix A.

4.3 Geophysical Surveys

Geophysical surveys were performed in order to accurately define the vertical and lateral extent of waste disposal activities, provide a clearer picture of the subsurface conditions at the site, and investigate the potential for buried objects. All survey grids were laid out using a compass and measuring chain. Stations were marked with labelled pin flags or spray paint in areas where asphalt or hard ground discouraged the use of pin flags. Several geophysical techniques were used during the investigations: earth resistivity by direct current Schlumberger soundings (vertical electrical sounds (VES), magnetic and magnetic gradient surveying, and fixed frequency electromagnetic profiling (EMP) conductivity surveys at three different depths (10, 20, 50 feet) of exploration. The Earth Technology Corporation of Golden, Colorado performed the geophysical surveys.

4.3.1 Electrical Resistivity

The Bison Model 2350 Earth Resistivity meter was utilized for the VES measurements. Current electrode separations used were (in meters): 1, 2, 3, 4, 6, 10, 14, 20, 30, 40, and 50. Due to variable ground conductivity, potential electrode separations varied slightly from site to site. The sounding data were processed using the ABEM VES iteration process to obtain a best fit curve and plotted logarithmically as resistivity in ohm-meters versus half the current electrode separation in meters. The plot also includes the layered earth model giving the best match. At most VES sites, orthogonal electrode arrays were used. The reason for this is to test for distortions of the data due to lateral inhomogeneities in the ground.

4.3.2 Electromagnetic Surveys

EMP survey was conducted at SWMU No. 18, Fire Department Training Area No. 1, using two devices: the Geonics EM31 and the Geonics EM34-3 ground conductivity sensors. Both ground conductivity sensors are designed for rapidly obtaining data over large areas. The meters employ magnetic dipoles or magnetic induction loops for transmission and reception of low-frequency electromagnetic waves. The effective depth sampled by the EM31 is 6 meters; the depth sampled by the EM34-3 depends on the coil separation and orientation, applied frequency, and to some extent on the conductivity profile of the subsurface. The techniques and conditions at Carswell AFB resulted in an effective sampling depth of 50 feet with the EM34-3.

4.3.3 Magnetometer Surveys

Magnetometer surveys were accomplished using an EDA PPM500 proton magnetometer. The use of the magnetometer was based on the fact that overburden at Carswell has a low magnetic susceptibility; the buried objects were believed to contain a significant amount of iron that would create a noticeable magnetic anomaly. Readings of the total field and magnetic gradient were taken at each location. The units for these readings are gammas and gammas per 1/2 meter,

10/10/80

respectively.

4.4 Drilling Techniques

Drilling at Carswell AFB was accomplished using a hollow-stem auger rig for the upper zone monitor wells and soil borings. This method were selected on the basis of the anticipated depth of completion, need for water-level observations, and expected geologic conditions. A hollow-stem auger drilling rig, the CME-75, was used to perform shallow soil borings and installation of the upper zone monitor wells. The hollow-stem method allowed for an accurate examination of soil conditions, identification of the position of the water table, and recovery of soil samples. The holes were drilled dry; no drilling fluids or additives were used. Samples of soil were collected with a split-spoon sampler, a hollow tube driven in advance of the auger at 5-foot intervals (ASTM D-1586). The samples were recovered at the surface, described in terms of lithology and moisture, and retained. Selected samples were frozen and shipped to Radian's laboratory for chemical analysis. Parameters for analysis are listed in Table 3.

4.5 Monitor Well Installation Methods

Upper zone groundwater monitor wells were installed immediately upon completion of the drilling operations. Usually, the borehole was observed for a period of time, as necessary, to determine the approximate static water level. Monitor well construction specifications are summarized in Table 4. Appropriate changes in the specifications were made on a site-by-site basis. The decisions relating to the setting of screen and casing, length of screen, and amount of gravel pack for each well were made on the basis of the observed static water level. If appropriate, the borehole was allowed to remain open overnight; there were no difficulties associated with the integrity of the borehole or caving problems.

The monitor wells were installed in the following way: screen and casing sections were cleaned and assembled on the ground, then lowered carefully into the borehole. As the string of screen and casing were lowered, additional

sections of casing were added until the bottom of the screen reached the complete depth of the borehole. Normally, enough casing was attached so as to leave a 2- to 3-foot stick-up at the ground surface. Clean gravel was carefully poured down the annular space until the level of the top of the gravel pack was at least 2 feet above the top of the screen (or as directed by the supervising geologist). Bentonite pellets were added to form a 2-foot thick seal, and if necessary, water from the well was bailed and poured down the annular space to hydrate the bentonite for completion activities that occurred above the water table.

TABLE 4
UPPER ZONE MONITOR WELL CONSTRUCTION SPECIFICATIONS
FOR CARSWELL AFB, TEXAS

-
- Casing: 2-inch diameter, flush joint, Schedule 40 PVC.
 - Screen: 2-inch diameter, flush joint, Schedule 40 PVC, 0.010 inch mill slot. Normal screen length was 10 feet, adjusted to 5 feet at the discretion of the supervising geologist.
 - Gravel pack: Texas Blastsand No. 1A, emplaced from bottom of hole to 2 feet above top of screen.
 - Bentonite seal: 2 feet above top of gravel pack.
 - Grout: neat cement (Type I Portland cement) grout tremied from the top of the bentonite seal to the land surface.
 - Surface completion: the PVC casing was cut off to provide a 2 to 3 foot stickup and solid cap placed on the casing. A 4-inch diameter guard pipe, 6 feet in length, was placed over the exposed casing and seated in the cement. A locking cap lid was installed on the guard pipe.
 - Guard pipes or posts: 3-inch diameter steel posts, 6 feet in length, with a minimum of 2 feet below ground, 3 each installed radially 4 feet from the wellhead.
 - After each well was installed, it was developed by hand pumping until a clear stream was produced, or until the supervising geologist determined that development was complete.
 - The split-spoon sampler was washed between samples (water, acetone, water) and the drill pipe, bit, and augers cleaned (pressure water wash) between monitor wells.
-

Neat cement grout was then prepared and tremied from the top of the bentonite seal to the land surface. After completion of grouting, protective 4-

inch diameter steel casing with lockable lids were cemented into place at the surface and three steel guard posts were positioned around the well.

The monitor wells were developed by pumping with a hand-operated pump. This technique involved removing water by means of a 1.7-inch diameter pump, usually with the effect of dewatering the well. The water in the casing was alternately purged and allowed to recover; this process generally took several hours. Most of the upper zone wells had very low yields. Water was removed from the well until the sediment content of the water was visibly reduced.

Southwestern Laboratories of Dallas, Texas performed the upper zone drilling and monitor well installation work.

4.6 Groundwater Sampling

During Phase II efforts at Carswell AFB, groundwater samples were collected for analysis from the groundwater monitor wells. Sampling was conducted twice at each well, approximately one month apart. Field sampling methodologies and equipment are detailed in the following sections.

4.6.1 Water Level Measurements

As the first step of groundwater sampling operations at each monitor well, water level measurements were taken with an Actat Olympic well probe. The probe and associated electrical line were washed with laboratory deionized water between each well to preclude the possibility of cross-contamination. Measurements were taken to the nearest 0.01 foot with respect to the top of the protective steel well casing.

Each well was purged either immediately prior to sample collection or within one day of sample collection (for low-yield wells) to ensure that representative formation water was collected as the sample. Purging operations were conducted using either a 1.7 inch hand pump or a 1.1 liter bottom-discharge Teflon bailer. Purging operations were considered complete when three wetted well volumes had been evacuated.

All down-hole equipment used during the purging of the monitor wells was

carefully washed with laboratory deionized water to prevent cross-contamination. In the case where overt evidence of chemical contamination was noted in a well (color, odor, oil, etc.) the sampling apparatus was washed with technical-grade acetone and thoroughly rinsed with deionized water.

Specific conductance and temperature were determined with the use of a conductivity and temperature meter. Temperature readings were checked using a mercury-in-glass thermometer. The pH of the discharged water was measured with the use of a pH meter. Prior to each pH measurement, the instrument was calibrated against standard solutions for pH values of 4, 7, and 10. Prior to exposure to discharge water, the selective ion probe was thoroughly washed with deionized water.

4.6.2 Sample Capture

After each well was purged of standing water to ensure representative groundwater characteristics, a sample was collected and split into the analytical aliquots. Samples from wells were collected for the analyses shown in Table 2. Samples analyzed for parameters listed on the above table were placed in containers and preserved. All samples were chilled to 4 degrees C after collection. All aspects of the sampling protocol were conducted in accordance with EPA-approved methodologies. Field QA/QC measures were employed to ensure that once collected, sample integrity was maintained during shipping and handling prior to analysis.

4.7 Field Safety

Before the field work was initiated, a Field Safety Plan was prepared. This plan, developed from available data, anticipated likely field hazards and prescribed appropriate personnel protective equipment for the field team. EPA Level C protection (impervious clothing, gloves, boots, and full-face or half-face cartridge respirators) was employed for most drilling and well installation activities. For other activities, EPA Level D protection (same as Level C, except that respirators were carried, but not worn) was deemed appropriate. The

Safety Plan was followed for the complete field effort, and provided adequate protection.

4.8 Surveying

After all wells were installed, wellhead elevations were determined to the nearest 0.01 foot by surveying from the floor of Building 1215 (Civil Engineering). This datum provided a convenient and known reference elevation in the absence of USGS benchmarks. A local surveying firm, Sempco, Inc., accomplished this work.

5.0 RESULTS OF SITE INVESTIGATIONS

5.1 SWMU No. 18, Fire Department Training Area No. 1.

5.1.1 Geology.

Geologic data developed at SWMU No. 18 resulted from three Stage 1 IRP activities: Geologic surveys (EMP and VES), geologic sampling during drilling operations, and observations of water levels during and after monitor well installation.

The geologic picture at SWMU No. 18 is based on an evaluation of drilling logs during the installation of two upper zone monitor wells. Upper zone materials consist of surficial deposits of clayey silt with variable amounts of fine sand and gravel, underlain by sand and gravel deposits. The thickness of the upper zone is approximately 14 feet at both of the monitor wells. Generally, the surficial clay and silt deposits are 5 feet in thickness and the sand and gravel deposits are 8 to 10 feet thick. Shale and limestone of the Goodland Formation underlie the upperzone materials at all locations.

5.1.2 Hydrogeology

Groundwater occurs in the upper zone materials underlying SWMU No.18 at depths ranging from 6 feet at 11B to 9 feet at 11A. The groundwater exists under

unconfined (water table) conditions in the upper zone materials. The occurrence and direction of groundwater movement in the upperzone appears to be directly related to the configuration of the bedrock surface.

5.1.3 Chemical Analytical Results

5.1.3.1 Water Quality - Samples of groundwater were collected and analyzed from monitor wells 11A and 11B in two sampling rounds. Parameters analyzed were water-quality indicators, heavy metals, petroleum hydrocarbons, purgeable halocarbons, purgeable aromatics, and extractable priority pollutants (11A only). The results of these tests are presented in Tables A-1 and A-2 (inorganic parameters) and Tables A-3 through A-7 (organic parameters) and are summarized in the following paragraphs. Table A-8 provides the results of field chemistry analyses.

5.1.3.1.1 Water Quality Indicators - Total dissolved solids (TDS) ranged from 570 mg/L to 820 mg/L during the two sampling rounds. Other indicators were within recommended standards and did not display any discernable trend between sampling rounds.

5.1.3.1.2 Petroleum Hydrocarbons - Petroleum Hydrocarbons were not detected at 11A or 11B.

5.1.3.1.3 Heavy Metals - Maximum contaminant levels were exceeded by arsenic in the first (0.096 ug/L) and second (0.068 ug/L) sampling events at monitor well 11B. Chromium (0.053 ug/L) also surpassed MCLs at 11B in the first sampling round. Iron and manganese were found in levels above the MCL at 11B using the ICP metal screen, but this was not confirmed with the graphite atomic absorption test.

Well 11B had a higher concentrations of heavy metals than 11A, but the trend from the first sampling round to the second was a decrease in metal

concentrations at well 11B, whereas there was an increase in metals at 11A.

5.1.3.1.4 Purgeable Halocarbons - Purgeable Halocarbons were not detected in the groundwater at SWMU No. 18.

5.1.3.1.5 Purgeable Aromatics - Toluene was found in all groundwater samples, ranging from 19 ug/L to 0.6 ug/L. Concentrations increased at both wells from the first to second rounds, but were under the toluene MCLG of 2.0 mg/L.

5.1.3.1.6 Extractable Priority Pollutants - Several priority pollutants (phthalate compounds) were detected in water samples from 11A. However, the substances detected were at low, sometimes estimated, levels, and occasionally were detected in the reagent blank sample.

5.1.3.2 Soil Chemistry - Split-spoon samples collected during monitor well installation were retained and visually examined for any evidence of contamination. Hand auger samples were collected at one location at the center of the site. Based on the depth and location of the samples, as well as the presence of water, samples of soils were selected for analysis consisting of metals, oil and grease, and volatile organic compounds (Methods 601 and 602). The samples were selected for analysis such that the vertical and horizontal distribution of contamination could be evaluated. Results of the testing is found at Table A-9.

5.1.3.2.1 Heavy Metals - Results of soil analysis indicate that the metals contents of the soil are generally within the expected limits for natural soils.

5.1.3.2.2 Organic Indicators - Values of oil and grease, phenols, TOC, and TOX are generally within expected limits of the soil.

5.1.3.2.3 Purgeable Halocarbons - Purgeable Halocarbons (trichloroethylene) was

detected in the soil at boring 11A(0.251 mg/Kg) and boring 11C(0.249 mg/Kg and 0.257 mg/Kg). These low concentrations were found at the center and north of the site.

5.1.4 Significance of Findings

5.1.4.1. Volatile organic compounds (with the exception of low levels of toluene and phthalate compounds attributable to laboratory contamination) were not detected in the upper zone groundwater.

5.1.4.2. Water quality parameters and metals concentrations were within expected and typical ranges for shallow alluvial aquifers.

5.1.4.3. Soil testing revealed low levels of purgeable halocarbons (TCE) at the center and north of the site.

5.2 SWMU No. 63, Entomology Dry Well

During the Stage 1 program three well (15A, 15B, 15C) were installed. The Stage 2 program consisted of hand augering and soil sampling at seven locations to determine the occurrence of pesticides and herbicides in shallow soil. Figure 4 shows the locations of the monitor wells and the hand auger borings.

5.2.1 Chemical Analytical Results

5.2.1.1 Water Chemistry

Groundwater samples were collected and analyzed from three monitor wells at the site. Water samples were analyzed for total organic carbons, herbicides and insecticides. Results of the tests are found in Table A-12.

5.2.1.1.1 Organic Indicators - The total organic carbon content of the groundwater samples does not indicate the presence of any substantial amounts of

10/10/00

organic compounds. The TOC values were lowest at well 15C (<1 mg/L) and highest at well 15B (5 mg/L).

5.2.1.1.2 Herbicides and Insecticides - Water collected from well 15C contained less than 0.1 ug/L on the insecticides Lindane and Endrin. No other insecticides or herbicides were detected in the groundwater.

5.2.1.2 Soil Chemistry

Eight soil samples from the vicinity of the Entomology Dry Well were obtained by hand augering during the period of 29 March through 1 April, 1988. These samples were analyzed for the presence of organic compounds, specifically organochlorine pesticides and PCBs. Results of the analyses are provided in Tables A-10 and A-11.

5.2.1.2.1 Organochlorine Pesticides and PCBs - Organochlorine pesticides were detected in all soil samples (15D - 15I) except 15J, the furthest upgradient sample. Chlordane was the most prevalent substance encountered, being found in samples from 15D, 15G, 15H and 15I. The highest value of 32,000 ug/Kg was in sample 15D, the furthest down gradient sampling location. Other chlordane findings ranged from 21 to 420 ug/Kg, and showed no apparent areal pattern. Location 15D also had the only detection of heptachlor, in a concentration of 980 ug/Kg. Auger locations 15E and 15F, while having no detection of chlordane in soil samples, each had findings of 4,4'-DDD and 4,4'-DDE. 15E had the largest concentrations, 140 ug/Kg (4,4'-DDD) and 29 ug/Kg (4,4'-DDE), while 15F had about 16 ug/Kg of each compound. There are no other organochlorine pesticides detected in the soil at SWMU No. 63.

5.2.2 Significance of Findings

The principal effort for the Stage 2 field program at SWMU No. 63 was to determine if pesticide contaminants occur in the near surface soil at the site of the former Entomology Dry Well. Six locations in the suspected area of the

dry well were hand augered and soil samples from the hand-augered holes were collected and analyzed. The following paragraphs contain the significance of the findings for soil contamination.

5.2.2.1 Soil - Based on a review of the soil chemistry data, the samples collected and analyzed from the Entomology Dry Well area show pesticides occur in the near surface soils. The pesticides detected in soil samples included chlordane, heptachlor, 4,4'-DDD, and 4,4'-DDE.

The occurrence of these pesticides in shallow soil is consistent with the past usage of the site as a storage area for base pesticides and herbicides. The lack of pattern of distribution of contaminants reflects the likely general usage of the site, rather than attributing the pesticides to a single or few spill events or disposal operations.

5.2.2.2 Groundwater - TOC and insecticides were detected in the groundwater at very low concentrations and not considered to pose a health hazard.

5.2.3 Further Investigations, SWMU No.63, Entomology Dry Well.

An additional investigation was conducted by Maxim Engineers, Inc in March 1990. The purpose of the investigation was to drill 24 soil-borings and analyze the soil samples to determine if pesticide contaminants were present in underlying soils in the vicinity of the Entomology Dry Well.

Drilling activities were conducted on March 22, 23 and 26, 1990. Borings were advanced west and south of Building 1337 as shown in Appendix C. Approximate boring locations were designated by base personnel. Slight changes in boring placement were made to avoid buried utility lines, surface obstructions, and overhead wires.

Borings were continuously sampled with a split-spoon sampler down to depths of 9-10 feet. Soils consisted primarily of varied mixtures of fill material. The upper soil interval (0-5 feet) ranged from clays to sands, while the lower interval consisted primarily of sands and coarse gravels. Fill debris including

APPENDIX A

**Test Data
SWMU No's 18 and 63**

TABLE A-1 RESULTS OF INORGANIC ANALYSES FOR WATER SAMPLES, SWMU 18 (FDTA 1), CARSWELL AFB, TEXAS.

PARAMETER	Monitor Well					
	EPA Standards, Criteria (mg/L)	1A 02-151 24-Feb-88	11A 04-02 05-Apr-88	11B 02-152 24-Feb-88	11B 04-03 05-Apr-88	
Total Dissolved Solids mg/L		570.0 (1.0)	570.0 (1.0)	820.0 (1.0)	732.0 (1.0)	
Filterable Residue (TDS)						
Fluoride mg/L		0.25 ()	0.24 ()	0.22 ()	0.20 ()	
Fluoride, SIE						
Chloride mg/L		68.0 ()	8.9 ()	18.0 ()	18.0 ()	
Chloride						
Nitrate mg/L as N		0.64 ()	0.59 ()	ND (0.020)	ND (0.20)	
Nitrate, colorimetric						
Orthophosphate mg/L		ND (0.020)	0.040 (0.020)	ND (0.020)	ND (0.020)	
Orthophosphate						
Sulfate mg/L		48.0 ()	48.0 ()	60.0 ()	120.0 ()	
Sulfate, nephelometry						
Metals ug/mL						
Arsenic, graphite AA	0.050(M)	0.0020 ()	0.0060 ⁺ ()	0.096 ()	0.068 ()	
Mercury	0.0020(M)	0.0030(R)	ND (0.00012)	ND (0.00012)	ND (0.00012)	
Lead, graphite AA	0.050(M)	0.0050R+ ()	0.0050R+ ()	0.036 ()	0.036 ()	
Selenium, graphite AA	0.010(M)	NDR+ (0.0050)	ND (0.0030)	ND 0.0050)	ND (0.0030)	

EPA Standards and Criteria are designated: M--Maximum Contaminant Level (MCL) or R--Recommended Maximum Contaminant Level (RMCL) or other secondary standard (Refer to Tables 4.1-1 and 4.1-2)

R+: Matrix spike recovery and % difference (MS and MS dup) outside control limits.

^: Indicates duplicate analysis is not within control limits.

ND: Not detected at specified detection limit.

(): Detection limit.

TABLE A-2 RESULTS OF INORGANIC ANALYSES FOR WATER SAMPLES, SWMU 18 (FDTA 1), CARSWELL AFB, TEXAS.

PARAMETER	EPA Standards, Criteria (mg/L)	Monitor Well					
		1A		11A		11B	
		02-151 24-Feb-88	04-02 05-Apr-88	02-152 24-Feb-88	04-03 05-Apr-88	02-152 24-Feb-88	04-03 05-Apr-88
Metal Screen (ICP) ug/ml							
Ag Silver	0.050(M)	ND (0.0090)	0.0090 (0.0090)	ND (0.0090)	ND (0.0090)	ND (0.0090)	ND (0.0090)
Al Aluminum		4.7 (0.20)	13.0 (0.20)	32.0 (0.20)	32.0 (0.20)	20.0 (0.20)	20.0 (0.20)
As Arsenic	0.050(M)	ND (0.30)	ND (0.30)	ND (0.30)	ND (0.30)	ND (0.30)	ND (0.30)
B Boron		ND (0.60)	ND (0.60)	ND (0.60)	ND (0.60)	ND (0.60)	ND (0.60)
Ba Barium	1.0(M) 1.5(R)	0.18 (0.0090)	0.19 (0.0090)	0.25 (0.0090)	0.25 (0.0090)	0.20 (0.0090)	0.20 (0.0090)
Be Beryllium		0.0010 (0.0010)	0.0020 (0.0010)	0.0020 (0.0010)	0.0020 (0.0010)	0.0060 (0.0010)	0.0060 (0.0010)
Ca Calcium		170.0 (0.060)	220.0 (0.060)	350.0 (0.060)	350.0 (0.060)	320.0 (0.060)	320.0 (0.060)
Cd Cadmium	0.010(M)	ND (0.0030)	ND (0.0030)	ND (0.0030)	ND (0.0030)	ND (0.0030)	ND (0.0030)
Co Cobalt		ND (0.010)	ND (0.010)	ND (0.010)	ND (0.010)	ND (0.010)	ND (0.010)
Cr Chromium	0.050(M) 0.12(R)	0.012 (0.0090)	0.024 (0.0090)	0.053 (0.0090)	0.053 (0.0090)	0.044 (0.0090)	0.044 (0.0090)
Cu Copper	1.0(R)	ND (0.010)	ND (0.010)	0.040 (0.010)	0.040 (0.010)	0.030 (0.010)	0.030 (0.010)
Fe Iron	0.30(R)	5.4 (0.030)	13.0 (0.030)	68.0 (0.030)	68.0 (0.030)	46.0 (0.030)	46.0 (0.030)
K Potassium		5.4 (0.30)	7.4 (0.30)	5.3 (0.30)	5.3 (0.30)	3.8 (0.30)	3.8 (0.30)
Mg Magnesium		10.0 (0.10)	13.0 (0.10)	13.0 (0.10)	13.0 (0.10)	11.0 (0.10)	11.0 (0.10)
Mn Manganese	0.050(R)	0.22 (0.0030)	0.29 (0.0030)	1.5 (0.0030)	1.5 (0.0030)	1.3 (0.0030)	1.3 (0.0030)
Mo Molybdenum		ND (0.050)	ND (0.050)	ND (0.050)	ND (0.050)	ND (0.050)	ND (0.050)
Na Sodium		14.0 (0.080)	14.0 (0.080)	35.0 (0.080)	35.0 (0.080)	36.0 (0.080)	36.0 (0.080)
Ni Nickel		ND (0.020)	ND (0.020)	0.050 (0.020)	0.050 (0.020)	0.030 (0.020)	0.030 (0.020)
Pb Lead	0.050(M) 0.020(R)	ND (0.050)	ND (0.050)	0.10 (0.050)	0.10 (0.050)	0.060 (0.050)	0.060 (0.050)
Sb Antimony		ND (0.060)	ND (0.060)	0.070 (0.060)	0.070 (0.060)	ND (0.060)	ND (0.060)
Se Selenium		ND (0.30)	ND (0.30)	ND (0.30)	ND (0.30)	ND (0.30)	ND (0.30)
Si Silicon		19.0 (0.30)	30.0 (0.30)	80.0 (0.30)	80.0 (0.30)	41.0 (0.30)	41.0 (0.30)
Ti Thallium		ND (0.090)	ND (0.090)	ND (0.090)	ND (0.090)	ND (0.090)	ND (0.090)
V Vanadium		ND (0.020)	0.030 (0.020)	0.11 (0.020)	0.11 (0.020)	0.080 (0.020)	0.080 (0.020)
Zn Zinc	5.0(R)	0.023 (0.0060)	0.055 (0.0060)	0.098 (0.0060)	0.098 (0.0060)	0.070 (0.0060)	0.070 (0.0060)

EPA Standards and Criteria are designated: M--Maximum Contaminant Level (MCL) or R--Recommended Maximum Contaminant Level (RMCL) or other secondary standard (Refer to Tables 4.1-1 and 4.1-2)

R+: Matrix spike recovery and % difference (MS and MS dup) outside control limits.

+: Indicates duplicate analysis is not within control limits.

ND: Not detected at specified detection limit.

(): Detection limit.

TABLE A-3 RESULTS OF ORGANIC ANALYSES FOR WATER SAMPLES, SWMU 18 (FDA 1), CARSWELL AFB, TEXAS

PARAMETER	EPA Standards, Criteria (mg/L)	Monitor Well			
		Sample ID			
		1A	11A	11B	11B
		Date Sampled	Date Sampled	Date Sampled	Date Sampled
Petroleum Hydrocarbons mg/L		02-151	04-02	02-152	04-03
Hydrocarbons ug/L		24-Feb-88	05-Apr-88	24-Feb-88	05-Apr-88
		ND (0.20)	ND (0.20)	ND (0.20)	ND (0.20)
Purgeable Halocarbons ug/L					
1,1,1-Trichloroethane	0.20(R)	ND (0.090)	ND (0.090)	ND (0.090)	ND (0.090)
1,1,2,2-Tetrachloroethane		ND (0.12)	ND (0.12)	ND (0.12)	ND (0.12)
1,1,2-Trichloroethane		ND (0.070)	ND (0.070)	ND (0.070)	ND (0.070)
1,1-Dichloroethane		ND (0.090)	ND (0.090)	ND (0.090)	ND (0.090)
1,1-Dichloroethene	0.0070(M)	ND (0.10)	ND (0.10)	ND (0.10)	ND (0.10)
1,2-Dichlorobenzene	0.62(R)	ND (0.50)	ND (0.50)	ND (0.50)	ND (0.50)
1,2-Dichloroethane	0.00000(F)	ND (0.030)	ND (0.030)	ND (0.030)	ND (0.030)
1,2-Dichloropropane		ND (0.10)	ND (0.10)	ND (0.10)	ND (0.10)
1,3-Dichlorobenzene	0.40(R)	ND (0.30)	ND (0.30)	ND (0.30)	ND (0.30)
1,4-Dichlorobenzene	0.75(M)	ND (0.40)	ND (0.40)	ND (0.40)	ND (0.40)
2-Chloroethylvinyl ether		ND (0.20)	ND (0.20)	ND (0.20)	ND (0.20)
Bromodichloromethane		ND (0.10)	ND (0.10)	ND (0.10)	ND (0.10)
Bromoform		ND (0.30)	ND (0.30)	ND (0.30)	ND (0.30)
Bromomethane		ND (1.2)	ND (1.2)	ND (1.2)	ND (1.2)
Carbon tetrachloride	0.0050(M)	0.00000(F)	ND (0.10)	ND (0.10)	ND (0.10)
Chlorobenzene	0.060(R)	ND (0.30)	ND (0.30)	ND (0.30)	ND (0.30)
Chloroethane		ND (0.50)	ND (0.50)	ND (0.50)	ND (0.50)
Chloroform		ND (0.050)	ND (0.050)	ND (0.050)	ND (0.050)
Chloromethane		ND (0.30)	ND (0.30)	ND (0.30)	ND (0.30)
Dibromochloromethane		ND (0.20)	ND (0.20)	ND (0.20)	ND (0.20)
Methylene chloride		ND (0.30)	ND (0.30)	ND (0.30)	ND (0.30)

EPA Standards and Criteria are designated: M-Maximum Contaminant Level (MCL) or R-Recommended Maximum Contaminant Level (RMCL) or other secondary standard (Refer to Tables 4.1-1 and 4.1-2)

&: cis-1,3-Dichloropropene cannot be quantitated due to coelution.

B: Found in reagent blank; not blank subtracted.

J: Estimated value (GC test codes).

Q Daily EPA GC recovery outside 95% confidence limit.

ND: Not detected at specified detection limit.

(): Detection limit.

TABLE A-4 RESULTS OF ORGANIC ANALYSES FOR WATER SAMPLES, SWMU 18 (FDTA 1), CARSWELL AFB, TEXAS

PARAMETER	EPA Standards, Criteria (mg/L)	Monitor Well Sample ID Date Sampled					
		1A 02-151 24-Feb-88	11A 04-02 05-Apr-88	11B 02-152 24-Feb-88	11B 04-03 05-Apr-88		
Tetrachloroethene	0.0080(R)	ND (0.030)	ND (0.030)	ND (0.030)	ND (0.030)	ND (0.030)	
Trichloroethene	0.0080(M)	ND (0.20)	ND (0.20)	ND (0.20)	ND (0.20)	ND (0.20)	
Trichlorofluoromethane		ND (0.10)	ND (0.10)	ND (0.10)	ND (0.10)	ND (0.10)	
Vinyl chloride	0.0010(M)	0.00000(R)	ND (0.20)	ND (0.20)	ND (0.20)	ND (0.20)	
cis-1,3-Dichloropropene		ND& ()	ND& ()	ND& ()	ND& ()	ND& ()	
trans-1,2-Dichloroethene		ND (0.20)	ND (0.20)	ND (0.20)	ND (0.20)	ND (0.20)	
trans-1,3-Dichloropropene		ND (0.30)	ND (0.30)	ND (0.30)	ND (0.30)	ND (0.30)	
Purgeable Aromatics ug/L							
1,2-Dichlorobenzene	0.62(R)	ND (0.40)	ND (0.40)	ND (4.0)	ND (0.40)	ND (0.40)	
1,3-Dichlorobenzene	0.40(R)	ND (0.40)	ND (0.40)	ND (4.0)	ND (0.40)	ND (0.40)	
1,4-Dichlorobenzene	0.75(M)	ND (0.30)	ND (0.30)	ND (3.0)	ND (0.30)	ND (0.30)	
Benzene	0.0050(M)	ND (0.20)	ND (0.20)	ND (2.0)	ND (0.20)	ND (0.20)	
Chlorobenzene	0.060(R)	ND (0.30)	ND (0.30)	ND (3.0)	ND (0.30)	ND (0.30)	
Ethylbenzene	0.68(R)	ND (0.30)	ND (0.30)	ND (3.0)	ND (0.30)	ND (0.30)	
Toluene		0.60 (0.20)	13.0 (0.20)	3.2 (2.0)	19.0 (0.20)	19.0 (0.20)	
m-Xylene		NDQ (0.20)	NDQ (0.20)	ND (2.0)	NDQ (0.20)	NDQ (0.20)	
o-Xylene		ND (0.10)	ND (0.10)	ND (1.0)	ND (0.10)	ND (0.10)	
p-Xylene		ND (0.20)	ND (0.20)	ND (2.0)	ND (0.20)	ND (0.20)	
Extractable Priority Pollutants ug/L							
1,2,4-trichlorobenzene		ND (1.9)	ND (2.1)				
1,2-dichlorobenzene		ND (1.9)	ND (2.1)				
1,3-dichlorobenzene		ND (1.9)	ND (2.1)				
1,4-dichlorobenzene	0.75(R)	ND (4.4)	ND (4.8)				

EPA Standards and Criteria are designated: M-Maximum Contaminant Level (MCL) or R-Recommended Maximum Contaminant Level (RMCL) or other

secondary standard (Refer to Tables 4.1-1 and 4.1-2)

&: cis-1,3-Dichloropropene cannot be quantitated due to coelution.

B: Found in reagent blank; not blank subtracted.

J: Estimated value (GC test codes).

Q: Daily EPA GC recovery outside 95% confidence limit.

ND: Not detected at specified detection limit.

(): Detection limit.

TABLE A-5 RESULTS OF ORGANIC ANALYSES FOR WATER SAMPLES, SWMU 18 (FDTA 1), CARSWELL AFB, TEXAS.

PARAMETER	EPA Standards, Criteria (mg/L)	Monitor Well		
		1A	11A	11B
		Sample ID Date Sampled	Sample ID Date Sampled	Sample ID Date Sampled
		02-151	04-02	11B
		24-Feb-88	05-Apr-88	24-Feb-88
2,4,5-trichlorophenol		ND (10.0)	ND (11.0)	
2,4,6-Trichlorophenol		ND (2.7)	ND (2.9)	
2,4-Dichlorophenol	3.1(R)	ND (2.7)	ND (2.9)	
2,4-Dimethylphenol	2.1(R)	ND (2.7)	ND (2.9)	
2,4-Dinitrophenol		ND (42.0)	ND (46.0)	
2,4-dinitrotoluene		ND (5.7)	ND (6.2)	
2,6-dinitrotoluene		ND (1.9)	ND (2.1)	
2-Chlorophenol		ND (3.3)	ND (3.6)	
2-Nitrophenol		ND (3.6)	ND (3.9)	
2-chloronaphthalene		ND (1.9)	ND (2.1)	
2-methylnaphthalene		ND (10.0)	ND (11.0)	
2-methylphenol		ND (10.0)	ND (11.0)	
2-nitroaniline		ND (50.0)	ND (55.0)	
3,3'-dichlorobenzidine		ND (17.0)	ND (18.0)	
3-nitroaniline		ND (50.0)	ND (55.0)	
4,6-dinitro-2-methylphenol		ND (24.0)	ND (26.0)	
4-Chloro-3-Methylphenol		ND (3.0)	ND (3.3)	
4-Nitrophenol		ND (2.4)	ND (2.6)	
4-bromophenyl-phenylether		ND (1.9)	ND (2.1)	
4-chloroaniline		ND (10.0)	ND (11.0)	
4-chlorophenyl-phenylether		ND (4.2)	ND (4.6)	
4-methylphenol		ND (10.0)	ND (11.0)	
4-nitroaniline		ND (50.0)	ND (55.0)	
Pentachlorophenol	0.22(R)	ND (3.6)	ND (3.9)	
Phenol	3.5(R)	ND (1.5)	ND (1.6)	

EPA Standards and Criteria are designated: M--Maximum Contaminant Level (MCL) or R--Recommended Maximum Contaminant Level (RMCL) or other

secondary standard (Refer to Tables 4.1-1 and 4.1-2)

&: cis-1,3-Dichloropropene cannot be quantitated due to coelution.

B: Found in reagent blank; not blank subtracted.

J: Estimated value (GC test codes)

Q: Daily EPA QC recovery outside 95% confidence limit.

ND: Not detected at specified detection limit.

(): Detection limit.

TABLE A-6 RESULTS OF ORGANIC ANALYSES FOR WATER SAMPLES, SWMU 18 (FDTA 1), CARSWELL AFB, TEXAS.

PARAMETER	Monitor Well					
	1A		11A		11B	
	Sample ID	Date Sampled	Sample ID	Date Sampled	Sample ID	Date Sampled
	02-151	04-02	02-152	04-03	05-Apr-88	05-Apr-88
EPA Standards, Criteria (mg/L)	24-Feb-88	05-Apr-88	24-Feb-88	04-03	05-Apr-88	05-Apr-88
acenaphthene	ND (1.9)	ND (2.1)	ND (2.1)	ND (2.1)	ND (2.1)	ND (2.1)
acenaphthylene	ND (3.5)	ND (3.8)	ND (3.8)	ND (3.8)	ND (3.8)	ND (3.8)
aniline	ND (10.0)	ND (2.1)	ND (2.1)	ND (2.1)	ND (2.1)	ND (2.1)
anthracene	ND (1.9)	ND (2.1)	ND (2.1)	ND (2.1)	ND (2.1)	ND (2.1)
benzidine	ND (44.0)	ND (2.1)	ND (2.1)	ND (2.1)	ND (2.1)	ND (2.1)
benzo(a)anthracene	ND (7.8)	ND (8.5)	ND (8.5)	ND (8.5)	ND (8.5)	ND (8.5)
benzo(a)pyrene	ND (2.5)	ND (2.7)	ND (2.7)	ND (2.7)	ND (2.7)	ND (2.7)
benzo(b)fluoranthene	ND (4.8)	ND (5.2)	ND (5.2)	ND (5.2)	ND (5.2)	ND (5.2)
benzo(g,h,i)perylene	ND (4.1)	ND (4.5)	ND (4.5)	ND (4.5)	ND (4.5)	ND (4.5)
benzo(k)fluoranthene	ND (2.5)	ND (2.7)	ND (2.7)	ND (2.7)	ND (2.7)	ND (2.7)
benzoic acid	ND (50.0)	ND (55.0)	ND (55.0)	ND (55.0)	ND (55.0)	ND (55.0)
benzyl alcohol	ND (50.0)	ND (55.0)	ND (55.0)	ND (55.0)	ND (55.0)	ND (55.0)
bis(2-chloroethoxy)methane	ND (5.3)	ND (5.8)	ND (5.8)	ND (5.8)	ND (5.8)	ND (5.8)
bis(2-chloroethyl)ether	ND (5.7)	ND (6.2)	ND (6.2)	ND (6.2)	ND (6.2)	ND (6.2)
bis(2-chloroisopropyl)ether	ND (5.7)	ND (6.2)	ND (6.2)	ND (6.2)	ND (6.2)	ND (6.2)
bis(2-ethylhexyl)phthalate	11.0B (2.5)	ND (2.7)	ND (2.7)	ND (2.7)	ND (2.7)	ND (2.7)
butylbenzylphthalate	ND (2.5)	1.8J (2.7)	1.8J (2.7)	1.8J (2.7)	1.8J (2.7)	1.8J (2.7)
chrysene	ND (2.5)	ND (2.7)	ND (2.7)	ND (2.7)	ND (2.7)	ND (2.7)
di-n-butylphthalate	6.1B (2.5)	ND (2.7)	ND (2.7)	ND (2.7)	ND (2.7)	ND (2.7)
di-n-octyl phthalate	3.8B (2.5)	2.0J (2.7)	2.0J (2.7)	2.0J (2.7)	2.0J (2.7)	2.0J (2.7)
dibenz(a,h)anthracene	ND (2.5)	ND (2.7)	ND (2.7)	ND (2.7)	ND (2.7)	ND (2.7)
dibenzofuran	ND (10.0)	ND (11.0)	ND (11.0)	ND (11.0)	ND (11.0)	ND (11.0)
diethylphthalate	ND (1.9)	ND (2.1)	ND (2.1)	ND (2.1)	ND (2.1)	ND (2.1)
dimethyl phthalate	ND (1.6)	ND (1.7)	ND (1.7)	ND (1.7)	ND (1.7)	ND (1.7)
fluorothene	ND (2.2)	ND (2.4)	ND (2.4)	ND (2.4)	ND (2.4)	ND (2.4)
	0.00003(R)					

EPA Standards and Criteria are designated: M--Maximum Contaminant Level (MCL) or R--Recommended Maximum Contaminant Level (RMCL) or other

secondary standard (Refer to Tables 4.1-1 and 4.1-2)
&: cis-1,3-Dichloropropene cannot be quantitated due to coelution.

B: Found in reagent blank; not blank subtracted.

J: Estimated value (GC test codes)

Q: Daily EPA QC recovery outside 95% confidence limit.

ND: Not detected at specified detection limit.

(): Detection limit.

TABLE A-7 RESULTS OF ORGANIC ANALYSES FOR WATER SAMPLES, SWMU 18 (FDTA 1), CARSWELL AFB, TEXAS.

PARAMETER	EPA Standards, Criteria (mg/L)	Monitor Well					
		1A	11A	11B	11B	11B	
		02-151 24-Feb-88	04-02 05-Apr-88	02-152 24-Feb-88	04-02 05-Apr-88	04-03 05-Apr-88	
fluorene	0.00003(R)	ND (1.9)	ND (2.1)				
hexachlorobenzene		ND (1.9)	ND (2.1)				
hexachlorobutadiene		ND (0.90)	ND (0.98)				
hexachlorocyclopentadiene		ND (6.0)	ND (6.5)				
hexachloroethane		ND (1.6)	ND (1.7)				
indeno(1,2,3-cd)pyrene		ND (3.7)	ND (4.0)				
isophorone	5.2(R)	ND (2.2)	ND (2.4)				
n-nitroso-di-n-propylamine		ND (12.0)	ND (13.0)				
n-nitrosodimethylamine		ND (10.0)					
n-nitrosodiphenylamine (1)		ND (1.9)	ND (2.1)				
naphthalene	0.62(R)	ND (1.6)	ND (1.7)				
nitrobenzene		ND (1.9)	ND (2.1)				
phenanthrene	0.00003(R)	ND (5.4)	ND (5.9)				
pyrene	0.00003(R)	ND (1.9)	ND (2.1)				

EPA Standards and Criteria are designated: M-Maximum Contaminant Level (MCL) or R-Recommended Maximum Contaminant Level (RMCL) or other secondary standard (Refer to Tables 4.1-1 and 4.1-2)

&: cis-1,3-Dichloropropene cannot be quantitated due to coelution.

B: Found in reagent blank; not blank subtracted.

J: Estimated value (GC test codes)

Q: Daily EPA OC recovery outside 95% confidence limit.

ND: Not detected at specified detection limit.

(): Detection limit.

TABLE A-8 RESULTS OF ORGANIC ANALYSES FOR WATER SAMPLES, SWMU 18 (FDTA 1), CARSWELL AFB, TEXAS

Primary Results		Monitor Well	
Analyte	Unit of Measure	Sample ID	Date Sampled
		11A	11B
		04-02	04-03
		05-Apr-88	05-Apr-88
Alkalinity	mg/L		690.0 (5.0)
Specific Conductance	uMHOS/CM	830.0 (1.0)	1100.0 (10.0)
Temperature	C	17.0 (1.0)	16.0 (1.0)
pH	S.U.	6.7 (0.010)	6.8 (0.010)

() : Detection limit.

TABLE A-9 RESULTS OF ORGANIC AND INORGANIC ANALYSES FOR SOIL SAMPLES, SWMU 18 (FDTA1), CARSWELL AFB, TEXAS

Primary Results	Boring Location					
	11A 9-10 ft	11B 9-10 ft	11C 0 ft	11C(1) 2 ft	11C 4 ft	11C 6 ft
METALS (ug/g)						
Arsenic	14	<3	<3	<3 (<3,<3)	<3	<3
Barium	<0.23	<0.23	42	39.5 (47,32)	32	20
Cadmium	<0.23	<0.2	<0.39	<0.40 (<0.39,<0.4)	<0.4	<0.39
Chromium	3.0	2.0	6.4	7.6 (7.9,7.3)	6.5	7.1
Lead	<4	<4	8	12.5 (13,12)	13	<4
Mercury	0.14	0.21	0.11	0.14 (0.08,0.19)	0.11	0.15
Selenium	9	<4	11	16.5 (17,16)	20	9
Silver	3.1	<0.18	<0.2	0.46 (<0.2,0.72)	1.6	0.74
ORGANIC INDICATORS (ug/g)						
Oil and Grease	<10	<10	100	1105 (2200,<10)	<10	<10
Phenols	<0.1	<0.1	<0.1	<0.1 (0.1,<10)	<0.1	<0.1
INSECTICIDES(2) (ug/g)	ND	ND	ND	ND,ND	ND	ND
HERBICIDES(2) (ug/g)	ND	ND	ND	ND,ND	ND	ND
PURGEABLE HALOCARBONS(2) (ug/g)						
Trichloroethylene	0.251	ND	0.249	ND,ND	ND	0.257
PURGEABLE AROMATICS(2) (ug/g)	ND	ND	ND	ND,ND	ND	ND

1: Duplicate field sample results reported. The average of the two analytical values is shown first, followed by the actual value in the parenthesis ().
 2: Parameters shown were detected (ND = not detected).
 Samples taken during January 1985.

TABLE A-10 RESULTS OF ORGANIC ANALYSES FOR SOIL SAMPLES, SWMU 63 (ENTOMOLOGY DRY WELL), CARSWELL AFB, TEXAS

Primary Results	Soil Boring					
	Sample ID	Date Sampled	Beg. Depth - End Depth	Sample ID	Date Sampled	Beg. Depth - End Depth
	15D	15E	15F	15G		
Parameter	CARS-03-068	CARS-03-045	CARS-03-046	CARS-03-069		
	31-Mar-88	29-Mar-88	29-Mar-88	31-Mar-88		
	0.01 - 1	1 - 2	2 - 4	1 - 2		
Organochlorine Pesticides and PCBs ug/Kg						
4,4'-DDD	ND	(10.0)	17.0C	ND	(2.4)	
4,4'-DDE	ND	(10.0)	16.0C	ND	(2.4)	
4,4'-DDT	ND	(20.0)	ND	ND	(4.8)	
Aldrin	ND	(10.0)	ND	ND	(2.4)	
Chlordane	32000.0C	(50.0)	ND	21.0C	(12.0)	
Dieldrin	ND	(10.0)	ND	ND	(2.4)	
Endosulfan I	ND	(10.0)	ND	ND	(2.4)	
Endosulfan II	ND	(30.0)	ND	ND	(7.2)	
Endosulfan Sulphate	ND	(50.0)	ND	ND	(12.0)	
Endrin	ND	(10.0)	ND	ND	(2.4)	
Endrin Aldehyde	ND	(20.0)	ND	ND	(4.8)	
Endrin Ketone	ND	(50.0)	ND	ND	(12.0)	
Heptachlor	980.0C	(10.0)	ND	ND	(2.4)	
Heptachlor Epoxide	ND	(10.0)	ND	ND	(2.4)	
Methoxychlor	ND	(50.0)	ND	ND	(12.0)	
PCB-1016	ND	(100.0)	ND	ND	(24.0)	
PCB-1221	ND	(200.0)	ND	ND	(48.0)	
PCB-1232	ND	(200.0)	ND	ND	(48.0)	
PCB-1242	ND	(100.0)	ND	ND	(24.0)	
PCB-1248	ND	(100.0)	ND	ND	(24.0)	
PCB-1254	ND	(200.0)	ND	ND	(48.0)	
PCB-1260	ND	(200.0)	ND	ND	(48.0)	
Toxaphene	ND	(500.0)	ND	ND	(120.0)	
alpha-BHC	ND	(10.0)	ND	ND	(2.4)	
beta-BHC	ND	(10.0)	ND	ND	(2.4)	
delta-BHC	ND	(10.0)	ND	ND	(2.4)	
gamma-BHC (lindane)	ND	(10.0)	ND	ND	(2.4)	
Chlorinated Phenoxy Herbicides ug/Kg						
2,4,5-T	ND	(50.0)	ND	ND	(60.0)	
2,4,5-TP (Silvex)	ND	(50.0)	ND	ND	(60.0)	
2,4-D	ND	(250.0)	ND	ND	(300.0)	

C: Second Column Confirmed
 ND: Not detected at specified detection limit
 (): Detection limit

TABLE A-11 RESULTS OF ORGANIC ANALYSES FOR SOIL SAMPLES, SWMU 63 (ENTOMOLOGY DRY WELL), CARSWELL AFB, TEXAS

Primary Results	Soil Boring					
	Sample ID		Date Sampled		Beg. Depth - End Depth	
	15H	15I	15J	15J	15J	15J
	CARS-03-070 01-Apr-88 0.01 - 1	CARS-03-071 01-Apr-88 1 - 2	CARS-03-046 01-Apr-88 2 - 4	CARS-03-046 01-Apr-88 2 - 4	CARS-03-073 01-Apr-88 1 - 2	CARS-03-073 01-Apr-88 1 - 2
Organochlorine Pesticides and PCBs ug/Kg						
4,4'-DDD	ND	(2.4)	ND	(21.0)	ND	(2.2)
4,4'-DDE	ND	(2.4)	ND	(21.0)	ND	(2.2)
4,4'-DDT	ND	(4.8)	ND	(42.0)	ND	(4.4)
Aldrin	ND	(2.4)	ND	(21.0)	ND	(2.2)
Chlordane	42.0C	(12.0)	420.0C	(110.0)	ND	(11.0)
Dieldrin	ND	(2.4)	ND	(21.0)	ND	(2.2)
Endosulfan I	ND	(2.4)	ND	(21.0)	ND	(2.2)
Endosulfan II	ND	(7.2)	ND	(63.0)	ND	(6.6)
Endosulfan Sulphate	ND	(12.0)	ND	(110.0)	ND	(11.0)
Endrin	ND	(2.4)	ND	(21.0)	ND	(2.2)
Endrin Aldehyde	ND	(4.8)	ND	(42.0)	ND	(4.4)
Endrin Ketone	ND	(12.0)	ND	(110.0)	ND	(11.0)
Heptachlor	ND	(2.4)	ND	(21.0)	ND	(2.2)
Heptachlor Epoxide	ND	(2.4)	ND	(21.0)	ND	(2.2)
Methoxychlor	ND	(12.0)	ND	(110.0)	ND	(11.0)
PCB-1016	ND	(24.0)	ND	(210.0)	ND	(22.0)
PCB-1221	ND	(48.0)	ND	(420.0)	ND	(44.0)
PCB-1232	ND	(48.0)	ND	(420.0)	ND	(44.0)
PCB-1242	ND	(24.0)	ND	(210.0)	ND	(22.0)
PCB-1248	ND	(24.0)	ND	(210.0)	ND	(22.0)
PCB-1254	ND	(48.0)	ND	(420.0)	ND	(44.0)
PCB-1260	ND	(48.0)	ND	(420.0)	ND	(44.0)
Toxaphene	ND	(120.0)	ND	(1100.0)	ND	(110.0)
alpha-BHC	ND	(2.4)	ND	(21.0)	ND	(2.2)
beta-BHC	ND	(2.4)	ND	(21.0)	ND	(2.2)
delta-BHC	ND	(2.4)	ND	(21.0)	ND	(2.2)
gamma-BHC (lindane)	ND	(2.4)	ND	(21.0)	ND	(2.2)
Chlorinated Phenoxy Herbicides ug/Kg						
2,4,5-T	ND	(61.0)	ND	(54.0)	ND	(55.0)
2,4,5-TP (Silvex)	ND	(61.0)	ND	(54.0)	ND	(55.0)
2,4-D	ND	(310.0)	ND	(270.0)	ND	(280.0)

C: Second Column Confirmed
 ND: Not detected at specified detection limit
 (): Detection limit

TABLE A-12 RESULTS OF GROUNDWATER SAMPLE ANALYSIS, SMMU 63 (ENTOMOLOGY DRY WELL), CARSWELL AFB, TEXAS.

Primary Results Parameter	Monitor Well Date Sampled					
	15A		15B		15C	
	Feb '85	Mar '85	Feb '85	Mar '85	Feb '85	Mar '85
ORGANIC INDICATORS (mg/L)						
TOC	3	4	4	5	<1	2
HERBICIDES(1) (ug/L)	ND	ND	ND	ND	ND	ND
PESTICIDES(1) (ug/L)						
Lindane	ND	ND	ND	ND	<0.1	ND
Endrin	ND	ND	ND	ND	<0.1	ND

1: Parameters shown were detected (ND = not detected)

APPENDIX B



Monitor Well Logs


RADIAN CORPORATION

Log: Monitor Well 15A

Project Carswell AFB IRP
 Location Northeast of Bldg. 1337
 Drilled by SWL (GME 75)
 Logged by L.M. French

Date of Drilling/Well Completion 1/18/85
 Elevations: Land Surface 570.62 Measuring Point 570.24
 Total Depth 15 ft.
 Drilling, Sampling Methods Hollow-stem auger; split-spoon

Depth (ft)	Sampling Record			Graphic Log	Geologic Description	Notes	Well Completion
	Sample Type	Blows per 6 inches	Sample I.D.				
+5-							
0-					FILL; gravelly sand, clay.		
5-	SS	5-5	15A1		SAND; fine to medium grained, brown-gray, dry; little silt and clay; trace fine gravel.		
10-	SS	7-10	15A2 (850875)		Interbedded sand and gravel with rounded rock fragments.	Water at 9 ft.	
15-	SS	50*	15A3		SHALE; gray, weathered near upper contact; few limestone layers. End of boring: 15 ft.	*for 6 inches.	
20-							
25-							
30-							
35-							
40-							



RADIAN CORPORATION

Log: Monitor Well 11A

Project CARROLL AFB IEP
 Location North of FTA 1
 Drilled by SHL (CRK 75)
 Logged by L.H. French

Date of Drilling/Well Completion 1/15/85
 Elevations: Land Surface 604.75 Measuring Point 608.25
 Total Depth 14.5 ft.
 Drilling, Sampling Methods Hollow-stem auger; split-spoon



Depth (ft)	Sampling Record			Graphic Log	Geologic Description	Notes	Well Completion
	Sample Type	Blows per 6 inches	Sample I.D.				
+5-						(11A destroyed on 1/23/85; replaced as shown at right)	
0-					GRAVEL; limestone, coarse; and CLAY, dry, light brown; with some silt and fine to coarse grained sand.		
5-	SS	4-7	11A1				
10-	SS	3-4	11A2 (850841)		SAND; medium to coarse grained, medium brown, stratified with thin gravel and shell layers.	Water at 8 ft.	
15-	SS	13-28	11A3			SHALE; blue-gray, massive, hard. End of boring: 14.5 feet.	
20-							
25-							
30-							
35-							
40-							

RADIAN CORPORATION

Log: Monitor Well 11B

Project Carswell AFB IEP
 Location South of ETA 1
 Drilled by SPL (CME 75)
 Logged by L.M. French

Dates of Drilling/Wall Completion 1/16/85
 Elevations: Land Surface 603.36 Measuring Point 608.11
 Total Depth 15 ft.
 Drilling, Sampling Methods Hollow-stem auger; split-spoon



Depth (ft)	Sampling Record			Graphic Log	Geologic Description	Notes	Well Completion
	Sample Type	Blows per 6 inches	Sample I.D.				
+5-							
0-					CLAY; dark brown to tan; with silt and fine sand. Trace fine gravel.		
5-	SS	4-5	11B1		SAND; medium brown, medium to coarse grained; little silt.	Water at 7 ft. Air sample negative.	
10-	SS	4-7	11B2 (850861)				
15-	SS	13-25	11B3		SHALE, blue-gray, massive, hard. End of boring: 15 ft.		
20-							
25-							
30-							
35-							
40-							

RADIAN CORPORATION

Log: Monitor Well 12B

Project Garwood AFB 122
 Location South of Bldg. 1337
 Drilled by BYL (GWR 75)
 Logged by L.H. French

Dates of Drilling/Well Completion 1/18/83
 Elevations: Land Surface 564.14 Measuring Point 568.09
 Total Depth 9 ft.
 Drilling, Sampling Methods Hollow-stem auger; split-spoon

Depth (ft)	Sampling Record			Graphic Log	Geologic Description	Notes	Well Completion
	Sample Type	Slows per 6 inches	Sample I.D.				
+5-							
0-					FILL; tan, sandy clay, dry.		
5-	SS	11-7	1581		SAND; fine to coarse grained, orange-brown, moist; with silt and variable amount of fine to coarse gravel. Increasing gravel in clayey matrix.		
10-	SS	50*	1582 (850874)		LIMESTONE; gray, hard, dry. End of boring: 9 ft.	Water at 9 feet. *for 3/4 inch.	
15-							
20-							
25-							
30-							
35-							
40-							

RADIAN CORPORATION

Log: Monitor Well 13C

Project Carwell AFB IRP
 Location South of Bldg. 1337
 Drilled by SVL (GME 75)
 Logged by L.N. French

Date of Drilling/Well Completion 1/18/85
 Elevations: Land Surface 564.17 Measuring Point 567.87
 Total Depth 12 ft.
 Drilling, Sampling Methods Hollow-stem auger; split-spoon

Depth (ft)	Sampling Record			Graphic Log	Geologic Description	Notes	Well Completion
	Sample Type	Blows per 6 inches	Sample I.D.				
+5-							
0-					FILL; asphalt, concrete, sandy gravel, dry.		
5-	SS	2-2	15G1		SILT; dark brown, moist; with SAND; fine to medium grained; trace fine gravel and clay.		
10-	SS	20-28	15G2		SHALE; light gray, dry, with Mn streaks and slightly mottled. End of boring: 12 ft.	Hard drilling at 8 ft.	
15-							
20-							
25-							
30-							
35-							
40-							



APPENDIX C

Report, Subsurface
Contamination, White House
Communications, Bldg 1337,
Maxim Engineers, Inc.
April 18, 1990

SUBSURFACE CONTAMINATION ASSESSMENT

**WHITE HOUSE COMMUNICATIONS
Building 1337**

**Project Number:
D-832**

**Prepared for:
CARSWELL AIR FORCE BASE**

**Prepared by:
MAXIM ENGINEERS, INC.
Environmental and Engineering Consultants
2342 Fabens/P.O. Box 59902
Dallas, Texas
(214) 247-7575
(800) 526-2946**

April 18, 1990

TABLE OF CONTENTS
PROJECT NO.: D-832
SUBSURFACE CONTAMINATION ASSESSMENT

SECTION I

- A. Introduction**
- B. Investigative Activities**
- C. Analytical Results**
- D. Conclusions**

SECTION II

- Figure 1 - USGS 7.5 - Minute Topographic Map**
- Figure 2 - Locations of Soil Borings**
- Soil Boring Logs**

SECTION III

- Analytical Laboratory Reports**

SECTION IV

- Site Photographs**

SECTION I

A. Introduction

The following report contains the results of subsurface sampling conducted by Maxim Engineers, Inc. near Building No. 1337 (White House Communications) at Carswell Air Force Base in Fort Worth, Texas. During previous sampling investigations conducted near the site, several pesticide components were detected in the underlying soils. This was of particular concern because the site was planned for building improvements and is situated approximately 200 feet northwest of the Kings Branch of the West Fork Trinity River (Figure 1). The scope of work for this investigation called for the advancement of twenty-four soil borings and analysis of soil samples to determine if pesticide contaminants are present in underlying soils immediately adjacent to the building.

B. Investigative Activities

Drilling activities were conducted on March 22, 23 and 26, 1990. Borings were advanced west and south of Building #1337 as shown in Figure 2. Approximate boring locations were designated prior to drilling by base personnel. Slight changes in boring placements were made to avoid buried utility lines, surface obstructions, and overhead wires.

Borings were continuously sampled with a split-spoon sampler down to depths of 9-10 feet. Complete soil descriptions are

given in the attached soil boring logs. Soils consisted primarily of varied mixtures of fill material. The upper soil interval (0-5 feet) ranged from clays to sands, while the lower interval consisted primarily of sands and coarse gravels. Fill debris including sheet metal scraps, blocks of wood, and glass fragments were present in several borings. Split-spoon refusal was commonly encountered at depths of approximately 9 feet due to the coarse nature of the constituent gravels. Groundwater was present across the southeast portion of the sample area at depths of 5.5 - 8.5 feet, occurring at progressively shallower intervals toward the southeast. A petroleum sheen and strong odors similar to diesel fuel were observed in borings B-11 and B-19, with borings B-7 and B-14 displaying moderate odors. Petroleum contamination occurred at depths generally consistent with groundwater levels.

One sample from each boring was retained for laboratory analysis of pesticide contaminants. Samples were placed in glass jars with teflon-lined lids and stored in a chilled insulated cooler while on site. Nine of the 24 samples were taken from the 3-5 foot depth interval while all other samples were retained from 8-10 foot depths. Sample depths and locations were selected to provide uniform coverage across the area at both depth intervals.

C. Analytical Results

Samples were analyzed at NDRC Laboratories in Richardson, Texas for Organochlorine Pesticides and PCB's (EPA Method 8080). Three samples (B-7, 8'-9'; B-11, 8'-9', B-19, 8'-9') were additionally analyzed for Total Petroleum Hydrocarbons (TPH) to investigate the occurrence of possible diesel fuel contamination.

Analytical results are summarized in Table 1. Samples from borings B-17, B-19, and B-20 displayed low concentrations of chlordane ranging from 11-16 parts per billion (ppb) while B-24 contained 75 ppb Endrin Aldehyde. All other samples displayed non-detectable concentrations of pesticides and PCB's. Except for B-17, all samples containing detectable levels of contaminants were from the 8-9 foot depth interval. In general, remediation action levels for these types of contaminants are in the part-per-million (ppm) range.

Samples analyzed for TPH displayed moderate to high contaminant concentrations. Sample B-11 contained 4800 (ppm) while samples B-7 and B-19 contained 220 ppm and 210 ppm, respectively.

TABLE 1
Summary of Soil Analyses

Location	Depth Interval	Chlordane (ppb)	Endrin Aldehyde (ppb)	TPH (ppm)
B-7	8'-10'	ND	ND	220
B-11	8'-10'	ND	ND	4800
B-17	3'-5'	11	ND	----
B-19	8'-10'	26	ND	210
B-20	8'-10'	26	ND	----
B-24	8'-10'	ND	75	----

D. Conclusions

The analytical results of this investigation indicate that 20 of the 24 borings contained non-detectable concentrations of pesticides and PCB's. Very low levels of chlordane (11-26 ppb) were encountered in three boring samples from the southeast portion of the property while one sample in the central part of the property contained low levels of Endrin Aldehyde. Hydrocarbon contamination is present at selected positions along the south property boundary at concentrations ranging from 210-4800 ppm. Samples displayed traces of free product and odors similar to diesel fuel. As some of these samples were collected from water-bearing intervals it is suspected that some degree of groundwater contamination is present across portions of the property.

SECTION II

10/10/10

Log of Boring

Number **B-1**

Location **See Site Plan**

Project **Carswell Air Force Base, Building No. 1337, Fort Worth, Texas**

Depth Feet	Sample Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo- ionization Reading	Benzene (ppm)	Toluene (ppm)	Xylene (ppm)	Ethyl Benzene (ppm)	Total BTXE (ppm)	T.P.H. (ppm)
		Hollow Stem	Unknown								
		STRATUM DESCRIPTION									
0.4		APPROXIMATELY 2" ASPHALT									
1.0		TAN CLAY with gravel									
2.0		DARK BROWN SILTY CLAY with minor gravel									
4.0		TAN SILTY CLAY with minor sand									
5		GRAY CLAYEY SILT with mottled iron stains									
6.5		GRAY AND TAN SAND, fine grained - with gravel									
9.5											

Completion Depth **9.5'**

Date **3/22/90**

Water Observations

None Encountered



Log of Boring

Number **B-2**

Location **See Site Plan**

Project

Carswell Air Force Base, Building No. 1337,

Fort Worth, Texas

Depth Feet	Samples Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo- ionization Reading	Benzene (ppm)	Toluene (ppm)	Xylene (ppm)	Ethyl Benzene (ppm)	Total BTXE (ppm)	T.P.H. (ppm)
		Hollow Stem	Unknown								
		Drilled By J. Hanna	Logged By Brian Mosley								
STRATUM DESCRIPTION											
		DARK BROWN SANDY CLAY									
2.0		TAN SANDY CLAY									
4.0		LIGHT BROWN AND ORANGE-BROWN SANDY CLAY									
6.5		ORANGE-BROWN SILTY SAND with minor clay									
10.0		10.0									

Completion Depth
10.0'

Date
3/22/90

Water Observations

None Encountered

Log of Boring

Number **B-3**

Location **See Site Plan See Site Plan**

Project **Carswell Air Force Base, Building No. 1337, Fort Worth, Texas**

Feet Depth	Samples Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo- Ionization Reading	Benzene (ppm)	Toluene (ppm)	Xylene (ppm)	Ethyl Benzene (ppm)	Total BTXE (ppm)	T.P.H. (ppm)
		Hollow Stem	Unknown								
		STRATUM DESCRIPTION									
0.4		APPROXIMATELY 2" ASPHALT									
1.0		APPROXIMATELY 4" SILT & GRAVEL									
2.0		DARK BROWN SILTY CLAY with minor sand									
4.0		LIGHT BROWN SILTY CLAY with minor sand									
5.0		GRAYISH TO ORANGE-BROWN SAND (fine-medium grained) with minor pebbles and gravel									
7.5		ORANGE-BROWN GRAVELLY SAND (coarse grained)									
9.0											

Completion Depth **9.0'**

Date **3/22/90**

Water Observations

None Encountered

Log of Boring

Number **B-4**

Location **See Site Plan**

Project

Carswell Air Force Base, Building No. 1337,

Fort Worth, Texas

Depth Feet	Samples Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo- ionization Reading	Benzene (ppm)	Toluene (ppm)	Xylene (ppm)	Ethyl Benzene (ppm)	Total BTXE (ppm)	T.P.H. (ppm)
		Hollow Stem	Unknown								
		STRATUM DESCRIPTION									
0.5		APPROXIMATELY 6" TAN SILT & GRAVEL									
2.0		DARK BROWN SANDY CLAY									
5.0		LIGHT BROWN SANDY CLAY									
5.0		GRAY AND TAN SAND									
7.5		ORANGE-BROWN GRAVELLY SAND with clean sand intervals									
9.0											

Completion Depth
9.0'

Date
3/22/90

Water Observations



None Encountered

Log of Boring

Number **B-5**

Location **See Site Plan**

Project **Carswell Air Force Base, Building No. 1337, Fort Worth, Texas**

Depth Feet	Samples Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo- ionization Reading	Benzene (ppm)	Toluene (ppm)	Xylene (ppm)	Ethyl Benzene (ppm)	Total BTXE (ppm)	T.P.H. (ppm)
		Hollow Stem	Unknown								
		Drilled By J. Hanna	Logged By Brian Mosley	STRATUM DESCRIPTION							
0.4		APPROXIMATELY 6" TAN SILT AND GRAVEL									
1.0		DARK BROWN SILTY CLAY with minor sand									
3.0		BROWN SILTY CLAY with minor sand									
4.5		GRAY AND TAN SILTY SAND ORANGE-BROWN SAND (fine to medium grained)									
7.0		ORANGE-BROWN GRAVELLY SAND with fine sand intervals									
9.0											

Completion Depth **9.0'** Date **3/22/90**

Water Observations **None Encountered**

Log of Boring

Number **B-6**

Location **See Site Plan**

Project **Carswell Air Force Base, Building No. 1337, Fort Worth, Texas**

Depth Feet	Samples Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo- ionization Reading	Benzene (ppm)	Toluene (ppm)	Xylene (ppm)	Ethyl Benzene (ppm)	Total BTXE (ppm)	T.P.H. (ppm)
		Hollow Stem	Unknown								
STRATUM DESCRIPTION											
		0.4	APPROXIMATELY 3" ASPHALT								
		1.5	TAN CLAY AND GRAVEL DARK BROWN SILTY CLAY								
		4.5	TAN AND GRAY SAND with layers of gravel								
		9.5									

Completion Depth **9.5'** Date **3/22/90** Water Observations **None Encountered**



Log of Boring

Number

B-7

Location

See Site Plan

Project

Carswell Air Force Base, Building No. 1337,

Fort Worth, Texas

Depth Feet	Samples Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo- ionization Reading	Benzene (ppm)	Toluene (ppm)	Xylene (ppm)	Ethyl Benzene (ppm)	Total BTXE (ppm)	T.P.H. (ppm)
		Hollow Stem	Unknown								
		Drilled By J. Hanna	Logged By Brian Mosley								
STRATUM DESCRIPTION											
0.5		APPROXIMATELY 4" ASPHALT									
2.0		BROWN CLAYEY SILT									
5		BROWN CLAYEY SAND with layers of coarse gravel - becomes greenish brown with some black discoloration									
6.5		GREENISH BROWN SANDY CLAY TO CLAYEY SAND with gravel, black discoloration and with moderate petroleum odor (Fill)									
10		10.0									220

Completion Depth
10.0'

Date
3/22/90

Water Observations

None Encountered



Log of Boring

Number **B-8**

Location **See Site Plan**

Project **Carswell Air Force Base, Building No. 1337, Fort Worth, Texas**

Depth Feet	Samples Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo- ionization Reading	Benzene (ppm)	Toluene (ppm)	Xylene (ppm)	Ethyl Benzene (ppm)	Total BTXE (ppm)	T.P.H. (ppm)
		Hollow Stem	Unknown								
		STRATUM DESCRIPTION									
		TAN GRAVEL									
1.0		DARK BROWN SANDY SILT									
1.5		BROWN SANDY CLAY with clayey sand									
3.0		ORANGE-BROWN SAND (fine to medium grained)									
7.0		GRAYISH BROWN GRAVELLY SAND (very coarse)									
9.0											

Completion Depth
9.0'

Date
3/22/90

Water Observations

None Encountered

Log of Boring

Number **B-9**

Location **See Site Plan**

Project **Carswell Air Force Base, Building No. 1337, Fort Worth, Texas**

Depth Feet	Samples Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo- ionization Reading	Benzene (ppm)	Toluene (ppm)	Xylene (ppm)	Ethyl Benzene (ppm)	Total BTXE (ppm)	T.P.H. (ppm)
		Hollow Stem	Unknown								
		STRATUM DESCRIPTION									
		DARK BROWN SANDY CLAY									
1.0		BROWN SANDY CLAY									
3.0		ORANGE-BROWN SILTY SAND with minor clay (fine to medium grained)									
5.5		ORANGE-BROWN SAND & GRAVEL (very coarse)									
9.0											

Completion Depth **9.0'** Date **3/22/90** Water Observations **Water Encountered at 8.5'**



1100-1400

Project **Carswell Air Force Base, Building No. 1337,** **Fort Worth, Texas**

Depth Feet	Samples Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo- ionization Reading	Benzene [ppm]	Toluene [ppm]	Xylene [ppm]	Ethyl Benzene [ppm]	Total BTXE [ppm]	T.P.H. [ppm]
		Hollow Stem	Unknown								
		STRATUM DESCRIPTION									
0.5		APPROXIMATELY 6" TAN GRAVEL									
		BROWN SANDY CLAY									
3.0		BROWN & TAN CLAYEY SAND, fine grained									
		- medium grained sand									
8.0		BROWN & TAN CLAYEY SAND with some gravel									
9.0											



Project **Carswell Air Force Base, Building No. 1337, Fort Worth, Texas**

Depth Feet	Samples Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo- ionization Reading	Benzene (ppm)	Toluene (ppm)	Xylene (ppm)	Ethyl Benzene (ppm)	Total BTXE (ppm)	T.P.H. (ppm)
		Hollow Stem	Unknown								
		STRATUM DESCRIPTION									
		0.3	APPROXIMATELY 2" ASPHALT								
		1.0 1.5	APPROXIMATELY 6" TAN GRAVEL								
			DARK BROWN SANDY CLAY with some black discoloration								
5		5.0	BROWN CLAYEY SILT & SAND with some black discoloration - with slight odor								
		7.0	BROWN & TAN GRAVELLY SAND (coarse grained)								
10		10.0	BROWN, TAN & GRAY GRAVEL, SAND & CLAY with moderate to strong petroleum odor (Fill)								4800

Note: Sheen on wash water, reddish oily like substance slightly visible on sample at a depth of 9 1/2'.



Log of Boring

Number **B-12**

Location **See Site Plan**

Project **Carswell Air Force Base, Building No. 1337, Fort Worth, Texas**

Feet	Samples Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo- ionization Reading	Benzene (ppm)	Toluene (ppm)	Xylene (ppm)	Ethyl Benzene (ppm)	Total BTXE (ppm)	T.P.H. (ppm)
		Hollow Stem	Unknown								
		STRATUM DESCRIPTION									
0.5		APPROXIMATELY 3" TAN GRAVEL									
1.5		DARK BROWN SANDY SILT with minor clay									
		ORANGE-BROWN CLAYEY SILT with some sand - increase in sand									
5.0		ORANGE-BROWN SILTY SAND with some gravel									
7.0		GRAYISH TAN SAND & GRAVEL (very coarse)									
9.0											

Completion Depth **9.0'**

Date **3/23/90**

Water Observations

Water Encountered at 8'

Project **Carswell Air Force Base, Building No. 1337,** **Fort Worth, Texas**

Depth Feet	Samples Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo- ionization Reading	Benzene (ppm)	Toluene (ppm)	Xylene (ppm)	Ethyl Benzene (ppm)	Total BTXE (ppm)	T.P.H. (ppm)
		Hollow Stem	Unknown								
		STRATUM DESCRIPTION									
0.5	[Symbol]	APPROXIMATELY 4" TAN GRAVEL									
		BROWN CLAYEY SILT with gravel									
4.0	[Symbol]	ORANGE-BROWN SILTY SAND (very fine grained) with minor gravel and clay									
7.0	[Symbol]	TAN SAND & GRAVEL (very coarse) ▽									
9.0											



Log of Boring

Number

B-14

Location

See Site Plan

Project

Carswell Air Force Base, Building No. 1337,

Fort Worth, Texas

Feet Depth	Samples Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo- ionization Reading	Benzene (ppm)	Toluene (ppm)	Xylene (ppm)	Ethyl Benzene (ppm)	Total BTXE (ppm)	T.P.H. (ppm)
		Hollow Stem	Unknown								
		STRATUM DESCRIPTION									
0.5	↑	APPROXIMATELY 6" TAN GRAVEL & SILT									
1.5		DARK BROWN CLAY with gravel									
5		ORANGE-BROWN SILTY SAND (very fine grained) with minor clay and gravel									
6.0		GREENISH BROWN SAND & CLAY with minor gravel									
10		(Fill)									
10.0											

Note: Slight sheen with moderate petroleum odor on sample at a depth from 8' to 10'.

Completion Depth
10.0'

Date
3/23/90

Water Observations

Water Encountered at 7'

Project **Carswell Air Force Base, Building No. 1337,** **Fort Worth, Texas**

Feet	Samples	Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo-ionization Reading	Benzene (ppm)	Toluene (ppm)	Xylene (ppm)	Ethyl Benzene (ppm)	Total BTXE (ppm)	T.P.H. (ppm)
			Hollow Stem	Unknown								
			J. Hanna									
			STRATUM DESCRIPTION									
			DARK BROWN TO BLACK CLAY with some sand, gravel and roots									
			(Fill)									
5			4.0	ORANGE-BROWN SANDY CLAY & GRAVEL								
			(Fill)									
			7.0	ORANGE-BROWN SAND TO SANDY GRAVEL								
			9.0									

Completion Depth **9.0'** Date **3/23/90** Water Observations **Water Encountered at 8'**

Project **Carswell Air Force Base, Building No. 1337, Fort Worth, Texas**

Depth Feet	Samples Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo- ionization Reading	Benzene (ppm)	Toluene (ppm)	Xylene (ppm)	Ethyl Benzene (ppm)	Total BTXE (ppm)	T.P.H. (ppm)
		Hollow Stem	Unknown								
		STRATUM DESCRIPTION									
	+	0.4	APPROXIMATELY 4" TAN GRAVEL & SILT								
		1.0	DARK BROWN TO BLACK CLAY with sand and gravel								
		2.5	TANNISH BROWN CLAY with gravel (Fill)								
5		5.0	DARK BROWN TO BLACK CLAY & GRAVEL with roots, wood pieces (Fill)								
			TAN SAND & GRAVEL (fine to coarse grained)								
		9.0									



Project **Carswell Air Force Base, Building No. 1337, Fort Worth, Texas**

Depth Feet	Samples Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo- ionization Reading	Benzene (ppm)	Toluene (ppm)	Xylene (ppm)	Ethyl Benzene (ppm)	Total BTXE (ppm)	T.P.H. (ppm)
		Hollow Stem	Unknown								
		STRATUM DESCRIPTION									
		TAN GRAVEL									
		1.0 BROWN SANDY CLAY									
		2.5									
		ORANGE-BROWN SILTY SAND with gravel									
5											
		(Fill)									
		8.0									
		ORANGE-BROWN GRAVEL with sand and clay (very coarse)									
10											
		10.0 (Fill)									



14444 - 10420

Project **Carswell Air Force Base, Building No. 1337, Fort Worth, Texas**

Depth Feet	Samples Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo- ionization Reading	Benzene (ppm)	Toluene (ppm)	Xylene (ppm)	Ethyl Benzene (ppm)	Total BTXE (ppm)	T.P.H. (ppm)
		Hollow Stem	Unknown								
		STRATUM DESCRIPTION									
0.5		APPROXIMATELY 6" TAN GRAVEL & SILT									
2.0		DARK BROWN CLAYEY SILT with sand traces									
3.5		ORANGE-BROWN SILT & GRAVEL									
4.0		ORANGE-BROWN SILT & GRAVEL									
5		TANNISH GRAY SANDY CLAY with clayey sand									
		(Fill)									
8.0		GRAVEL with cobbles and some sand (very coarse)									
10		10.0									



Log of Boring

Number **B-19**

Location **See Site Plan**

Project **Carswell Air Force Base, Building No. 1337, Fort Worth, Texas**

Depth Feet	Samples Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo- ionization Reading	Benzene (ppm)	Toluene (ppm)	Xylene (ppm)	Ethyl Benzene (ppm)	Total BTXE (ppm)	T.P.H. (ppm)
		Hollow Stem	Unknown								
		Drilled By J. Hanna	Logged By Brian Mosley								
STRATUM DESCRIPTION											
0.5		APPROXIMATELY 6" SURFACE GRAVEL & SILT									
1.5		DARK BROWN SANDY SILT with minor clay									
2.0											
3.0		ORANGE-BROWN SANDY SILT									
5.0		ORANGE-BROWN SILTY GRAVEL									
6.5		TANNISH GRAY SANDY CLAY with clayey sand									
		TANNISH BROWN SANDY GRAVEL with clay intervals									
10.0		(Fill)									
											210

Note: Sheen on wash water with strong odor on the 6' to 8' sample.

Completion Depth
10.0'

Date
3/23/90

Water Observations

Water Encountered at 5 1/2'

Log of Boring

Number **B-20**

Location **See Site Plan**

Project

Carswell Air Force Base, Building No. 1337,

Fort Worth, Texas

Feet Depth	Samples Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo- ionization Reading	Benzene (ppm)	Toluene (ppm)	Xylene (ppm)	Ethyl Benzene (ppm)	Total BTXE (ppm)	T.P.H. (ppm)
		Hollow Stem	Unknown								
		Drilled By J. Hanna	Logged By Brian Mosley								
STRATUM DESCRIPTION											
0.5		APPROXIMATELY 6" GRAVEL									
2.0		DARK BROWN SILTY CLAY with minor gravel									
5		ORANGE-BROWN SANDY SILT with minor clay - fill debris (sheet metal, glass, etc.)									
8.0		ORANGE-BROWN SAND & GRAVEL with cobble size debris (very coarse)									
10.0											

Completion Depth
10.0'

Date
3/23/90

Water Observations

Water Encountered at 6'

Log of Boring

Number **B-21**

Location **See Site Plan**

Project

Carswell Air Force Base, Building No. 1337,

Fort Worth, Texas

Depth Feet	Samples Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo- ionization Reading	Benzene (ppm)	Toluene (ppm)	Xylene (ppm)	Ethyl Benzene (ppm)	Total BTXE (ppm)	T.P.H. (ppm)
		Hollow Stem	Unknown								
		Drilled By J. Hanna	Logged By Brian Mosley								
STRATUM DESCRIPTION											
0.5		APPROXIMATELY 4" ASPHALT									
		TANNISH GRAY AND BROWN CLAY with gravel (Fill)									
3.0		BLACK CLAY with minor gravel, wood chips and charcoal debris									
6.0		ORANGE-BROWN GRAVEL & SAND									
10.0											

Completion Depth
10.0'

Date
3/23/90

Water Observations

Water Encountered at 6'

Log of Boring

Number **B-22**

Location **See Site Plan**

Project **Carswell Air Force Base, Building No. 1337, Fort Worth, Texas**

Depth Feet	Samples Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo- ionization Reading	Benzene (ppm)	Toluene (ppm)	Xylene (ppm)	Ethyl Benzene (ppm)	Total BTXE (ppm)	T.P.H. (ppm)
		Hollow Stem	Unknown								
		STRATUM DESCRIPTION									
0.5		APPROXIMATELY 6" TAN SILT									
1.5		BROWN CLAY with some gravel									
2.0		BLACK CLAYEY SILT									
5		DARK GREENISH GRAY CLAYEY SAND with sandy clay									
9.0		TAN GRAVEL (very coarse)									
10.0											

Completion Depth **10.0'**

Date **3/23/90**

Water Observations

Water Encountered at **6'**

Project **Carswell Air Force Base, Building No. 1337, Fort Worth, Texas**

Depth Feet	Samples Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo- ionization Reading	Benzene (ppm)	Toluene (ppm)	Xylene (ppm)	Ethyl Benzene (ppm)	Total BTXE (ppm)	T.P.H. (ppm)
		Hollow Stem	Unknown								
STRATUM DESCRIPTION											
0.4		APPROXIMATELY 6" GRAVEL									
1.0		APPROXIMATELY 6" DARK BROWN SILT									
		LIGHT BROWN SILTY SAND with sandy silt and minor clay									
5.0		TANNISH BROWN GRAVELLY SAND (medium to coarse grained)									
7.0		TANNISH BROWN CLAY & GRAVEL									
8.0		(Fill)									
9.0		TANNISH GRAVELLY SAND (very coarse)									

Completion Depth **9.0'** Date **3/26/90** Water Observations **Water Encountered at 6 1/2'**

Log of Boring

Number **B-24**

Location **See Site Plan**

Project **Carswell Air Force Base, Building No. 1337, Fort Worth, Texas**

Feet Depth	Samples Symbol	Auger Type	Casing Elevation	Well Construction Details	Photo- ionization Reading	Benzene (ppm)	Toluene (ppm)	Xylene (ppm)	Ethyl Benzene (ppm)	Total BTXE (ppm)	T.P.H. (ppm)
		Hollow Stem	Unknown								
		Drilled By J. Hanna	Logged By Brian Mosley								
STRATUM DESCRIPTION											
0.5		APPROXIMATELY 6" CLAY & GRAVEL									
2.0		DARK BROWN SANDY SILT with minor clay									
3.5		BROWN SANDY SILT with minor clay									
5		ORANGE-BROWN SANDY SILT with minor clay									
5.5		TANNISH BROWN GRAVELLY SAND (medium to coarse grained)									
6.5		CLAY AND GRAVEL									
10		(Fill)									
10.0											

Completion Depth **10.0'** Date **3/26/90** Water Observations

None Encountered



03/26/90

SECTION III



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592
Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8253

REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.

ADDRESS: P.O. Box 59902

Dallas, TX 75229

ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL

ID MARKS: B-1 8-9' Project #D832

TEST REQUESTED	DETECTION LIMIT			RESULTS	
Organochlorine Pesticides and PCB's					
Aldrin	2.7	ug/Kg	<	2.7	ug/Kg
Alpha-BHC	2.0	ug/Kg	<	2.0	ug/Kg
Beta-BHC	4.0	ug/Kg	<	4.0	ug/Kg
Delta-BHC	6.0	ug/Kg	<	6.0	ug/Kg
Gamma-BHC (Lindane)	2.6	ug/Kg	<	2.6	ug/Kg
Chlordane	9.3	ug/Kg	<	9.3	ug/Kg
4,4'-DDD	7.3	ug/Kg	<	7.3	ug/Kg
4,4'-DDE	2.6	ug/Kg	<	2.6	ug/Kg
4,4'-DDT	8.0	ug/Kg	<	8.0	ug/Kg
Dieldrin	1.3	ug/Kg	<	1.3	ug/Kg
Endosulfan I	9.3	ug/Kg	<	9.3	ug/Kg
Endosulfan II	2.6	ug/Kg	<	2.6	ug/Kg
Endosulfan Sulfate	44.2	ug/Kg	<	44.2	ug/Kg
Endrin	4.0	ug/Kg	<	4.0	ug/Kg
Endrin Aldehyde	15.4	ug/Kg	<	15.4	ug/Kg
Heptachlor	2.0	ug/Kg	<	2.0	ug/Kg
Heptachlor Epoxide	55.6	ug/Kg	<	55.6	ug/Kg
Methoxychlor	121	ug/Kg	<	121	ug/Kg
Toxaphene	161	ug/Kg	<	161	ug/Kg
PCB-1016	6	ug/Kg	<	6	ug/Kg
PCB-1221	6	ug/Kg	<	6	ug/Kg
PCB-1232	6	ug/Kg	<	6	ug/Kg
PCB-1242	6	ug/Kg	<	6	ug/Kg
PCB-1248	6	ug/Kg	<	6	ug/Kg
PCB-1254	6	ug/Kg	<	6	ug/Kg
PCB-1260	6	ug/Kg	<	6	ug/Kg

NDRC Laboratories, Inc.

David R. Godwin
David R. Godwin, Ph.D.
Chief Executive Officer



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592
Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8254
REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.
ADDRESS: P.O. Box 59902
Dallas, TX 75229
ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL
ID MARKS: B-2 8-10' Project #D832

TEST REQUESTED	DETECTION LIMIT			RESULTS	
Organochlorine Pesticides and PCB's					
Aldrin	2.7	ug/Kg	<	2.7	ug/Kg
Alpha-BHC	2.0	ug/Kg	<	2.0	ug/Kg
Beta-BHC	4.0	ug/Kg	<	4.0	ug/Kg
Delta-BHC	6.0	ug/Kg	<	6.0	ug/Kg
Gamma-BHC (Lindane)	2.6	ug/Kg	<	2.6	ug/Kg
Chlordane	9.3	ug/Kg	<	9.3	ug/Kg
4,4'-DDD	7.3	ug/Kg	<	7.3	ug/Kg
4,4'-DDE	2.6	ug/Kg	<	2.6	ug/Kg
4,4'-DDT	8.0	ug/Kg	<	8.0	ug/Kg
Dieldrin	1.3	ug/Kg	<	1.3	ug/Kg
Endosulfan I	9.3	ug/Kg	<	9.3	ug/Kg
Endosulfan II	2.6	ug/Kg	<	2.6	ug/Kg
Endosulfan Sulfate	44.2	ug/Kg	<	44.2	ug/Kg
Endrin	4.0	ug/Kg	<	4.0	ug/Kg
Endrin Aldehyde	15.4	ug/Kg	<	15.4	ug/Kg
Heptachlor	2.0	ug/Kg	<	2.0	ug/Kg
Heptachlor Epoxide	55.6	ug/Kg	<	55.6	ug/Kg
Methoxychlor	121	ug/Kg	<	121	ug/Kg
Toxaphene	161	ug/Kg	<	161	ug/Kg
PCB-1016	6	ug/Kg	<	6	ug/Kg
PCB-1221	6	ug/Kg	<	6	ug/Kg
PCB-1232	6	ug/Kg	<	6	ug/Kg
PCB-1242	6	ug/Kg	<	6	ug/Kg
PCB-1248	6	ug/Kg	<	6	ug/Kg
PCB-1254	6	ug/Kg	<	6	ug/Kg
PCB-1260	6	ug/Kg	<	6	ug/Kg

NDRC Laboratories, Inc. David R. Godwin ✓
David R. Godwin, Ph.D.
Chief Executive Officer



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592
Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8255
REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.
ADDRESS: P.O. Box 59902
Dallas, TX 75229
ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL
ID MARKS: B-3 3-5' Project #D832

TEST REQUESTED	DETECTION LIMIT			RESULTS	
Organochlorine Pesticides and PCB's					
Aldrin	2.7	ug/Kg	<	2.7	ug/Kg
Alpha-BHC	2.0	ug/Kg	<	2.0	ug/Kg
Beta-BHC	4.0	ug/Kg	<	4.0	ug/Kg
Delta-BHC	6.0	ug/Kg	<	6.0	ug/Kg
Gamma-BHC (Lindane)	2.6	ug/Kg	<	2.6	ug/Kg
Chlordane	9.3	ug/Kg	<	9.3	ug/Kg
4,4'-DDD	7.3	ug/Kg	<	7.3	ug/Kg
4,4'-DDE	2.6	ug/Kg	<	2.6	ug/Kg
4,4'-DDT	8.0	ug/Kg	<	8.0	ug/Kg
Dieldrin	1.3	ug/Kg	<	1.3	ug/Kg
Endosulfan I	9.3	ug/Kg	<	9.3	ug/Kg
Endosulfan II	2.6	ug/Kg	<	2.6	ug/Kg
Endosulfan Sulfate	44.2	ug/Kg	<	44.2	ug/Kg
Endrin	4.0	ug/Kg	<	4.0	ug/Kg
Endrin Aldehyde	15.4	ug/Kg	<	15.4	ug/Kg
Heptachlor	2.0	ug/Kg	<	2.0	ug/Kg
Heptachlor Epoxide	55.6	ug/Kg	<	55.6	ug/Kg
Methoxychlor	121	ug/Kg	<	121	ug/Kg
Toxaphene	161	ug/Kg	<	161	ug/Kg
PCB-1016	6	ug/Kg	<	6	ug/Kg
PCB-1221	6	ug/Kg	<	6	ug/Kg
PCB-1232	6	ug/Kg	<	6	ug/Kg
PCB-1242	6	ug/Kg	<	6	ug/Kg
PCB-1248	6	ug/Kg	<	6	ug/Kg
PCB-1254	6	ug/Kg	<	6	ug/Kg
PCB-1260	6	ug/Kg	<	6	ug/Kg

NDRC Laboratories, Inc. *David R. Godwin*
David R. Godwin, Ph.D.
Chief Executive Officer



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592
Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8256
REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.
ADDRESS: P.O. Box 59902
Dallas, TX 75229
ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL
ID MARKS: B-4 8-9' Project #D832

TEST REQUESTED	DETECTION LIMIT			RESULTS	
Organochlorine Pesticides and PCB's					
Aldrin	2.7	ug/Kg	<	2.7	ug/Kg
Alpha-BHC	2.0	ug/Kg	<	2.0	ug/Kg
Beta-BHC	4.0	ug/Kg	<	4.0	ug/Kg
Delta-BHC	6.0	ug/Kg	<	6.0	ug/Kg
Gamma-BHC (Lindane)	2.6	ug/Kg	<	2.6	ug/Kg
Chlordane	9.3	ug/Kg	<	9.3	ug/Kg
4,4'-DDD	7.3	ug/Kg	<	7.3	ug/Kg
4,4'-DDE	2.6	ug/Kg	<	2.6	ug/Kg
4,4'-DDT	8.0	ug/Kg	<	8.0	ug/Kg
Dieldrin	1.3	ug/Kg	<	1.3	ug/Kg
Endosulfan I	9.3	ug/Kg	<	9.3	ug/Kg
Endosulfan II	2.6	ug/Kg	<	2.6	ug/Kg
Endosulfan Sulfate	44.2	ug/Kg	<	44.2	ug/Kg
Endrin	4.0	ug/Kg	<	4.0	ug/Kg
Endrin Aldehyde	15.4	ug/Kg	<	15.4	ug/Kg
Heptachlor	2.0	ug/Kg	<	2.0	ug/Kg
Heptachlor Epoxide	55.6	ug/Kg	<	55.6	ug/Kg
Methoxychlor	121	ug/Kg	<	121	ug/Kg
Toxaphene	161	ug/Kg	<	161	ug/Kg
PCB-1016	6	ug/Kg	<	6	ug/Kg
PCB-1221	6	ug/Kg	<	6	ug/Kg
PCB-1232	6	ug/Kg	<	6	ug/Kg
PCB-1242	6	ug/Kg	<	6	ug/Kg
PCB-1248	6	ug/Kg	<	6	ug/Kg
PCB-1254	6	ug/Kg	<	6	ug/Kg
PCB-1260	6	ug/Kg	<	6	ug/Kg

NDRC Laboratories, Inc.

David R. Godwin, Ph.D.
David R. Godwin, Ph.D.
Chief Executive Officer



NDRCLABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592
Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8257
REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.
ADDRESS: P.O. Box 59902
Dallas, TX 75229
ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL
ID MARKS: B-5 8-9' Project #D832

TEST REQUESTED	DETECTION LIMIT			RESULTS	
Organochlorine Pesticides and PCB's					
Aldrin	2.7	ug/Kg	<	2.7	ug/Kg
Alpha-BHC	2.0	ug/Kg	<	2.0	ug/Kg
Beta-BHC	4.0	ug/Kg	<	4.0	ug/Kg
Delta-BHC	6.0	ug/Kg	<	6.0	ug/Kg
Gamma-BHC (Lindane)	2.6	ug/Kg	<	2.6	ug/Kg
Chlordane	9.3	ug/Kg	<	9.3	ug/Kg
4,4'-DDD	7.3	ug/Kg	<	7.3	ug/Kg
4,4'-DDE	2.6	ug/Kg	<	2.6	ug/Kg
4,4'-DDT	8.0	ug/Kg	<	8.0	ug/Kg
Dieldrin	1.3	ug/Kg	<	1.3	ug/Kg
Endosulfan I	9.3	ug/Kg	<	9.3	ug/Kg
Endosulfan II	2.6	ug/Kg	<	2.6	ug/Kg
Endosulfan Sulfate	44.2	ug/Kg	<	44.2	ug/Kg
Endrin	4.0	ug/Kg	<	4.0	ug/Kg
Endrin Aldehyde	15.4	ug/Kg	<	15.4	ug/Kg
Heptachlor	2.0	ug/Kg	<	2.0	ug/Kg
Heptachlor Epoxide	55.6	ug/Kg	<	55.6	ug/Kg
Methoxychlor	121	ug/Kg	<	121	ug/Kg
Toxaphene	161	ug/Kg	<	161	ug/Kg
PCB-1016	6	ug/Kg	<	6	ug/Kg
PCB-1221	6	ug/Kg	<	6	ug/Kg
PCB-1232	6	ug/Kg	<	6	ug/Kg
PCB-1242	6	ug/Kg	<	6	ug/Kg
PCB-1248	6	ug/Kg	<	6	ug/Kg
PCB-1254	6	ug/Kg	<	6	ug/Kg
PCB-1260	6	ug/Kg	<	6	ug/Kg

NDRCLaboratories, Inc.

David R. Godwin
David R. Godwin, Ph.D.
Chief Executive Officer



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592
Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8258
REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.
ADDRESS: P.O. Box 59902
Dallas, TX 75229
ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL
ID MARKS: B-6 3-5' Project #D832

TEST REQUESTED	DETECTION LIMIT			RESULTS	
Organochlorine Pesticides and PCB's					
Aldrin	2.7	ug/Kg	<	2.7	ug/Kg
Alpha-BHC	2.0	ug/Kg	<	2.0	ug/Kg
Beta-BHC	4.0	ug/Kg	<	4.0	ug/Kg
Delta-BHC	6.0	ug/Kg	<	6.0	ug/Kg
Gamma-BHC (Lindane)	2.6	ug/Kg	<	2.6	ug/Kg
Chlordane	9.3	ug/Kg	<	9.3	ug/Kg
4,4'-DDD	7.3	ug/Kg	<	7.3	ug/Kg
4,4'-DDE	2.6	ug/Kg	<	2.6	ug/Kg
4,4'-DDT	8.0	ug/Kg	<	8.0	ug/Kg
Dieldrin	1.3	ug/Kg	<	1.3	ug/Kg
Endosulfan I	9.3	ug/Kg	<	9.3	ug/Kg
Endosulfan II	2.6	ug/Kg	<	2.6	ug/Kg
Endosulfan Sulfate	44.2	ug/Kg	<	44.2	ug/Kg
Endrin	4.0	ug/Kg	<	4.0	ug/Kg
Endrin Aldehyde	15.4	ug/Kg	<	15.4	ug/Kg
Heptachlor	2.0	ug/Kg	<	2.0	ug/Kg
Heptachlor Epoxide	55.6	ug/Kg	<	55.6	ug/Kg
Methoxychlor	121	ug/Kg	<	121	ug/Kg
Toxaphene	161	ug/Kg	<	161	ug/Kg
PCB-1016	6	ug/Kg	<	6	ug/Kg
PCB-1221	6	ug/Kg	<	6	ug/Kg
PCB-1232	6	ug/Kg	<	6	ug/Kg
PCB-1242	6	ug/Kg	<	6	ug/Kg
PCB-1248	6	ug/Kg	<	6	ug/Kg
PCB-1254	6	ug/Kg	<	6	ug/Kg
PCB-1260	6	ug/Kg	<	6	ug/Kg

NDRC Laboratories, Inc.

David R. Godwin
David R. Godwin, Ph.D.
Chief Executive Officer



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592

Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8259

REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.

ADDRESS: P.O. Box 59902

Dallas, TX 75229

ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL

ID MARKS: B-7 8-10' Project #D832

TEST REQUESTED

DETECTION LIMIT

RESULTS

Organochlorine Pesticides and PCB's

Aldrin	2.7	ug/Kg	<	2.7	ug/Kg
Alpha-BHC	2.0	ug/Kg	<	2.0	ug/Kg
Beta-BHC	4.0	ug/Kg	<	4.0	ug/Kg
Delta-BHC	6.0	ug/Kg	<	6.0	ug/Kg
Gamma-BHC (Lindane)	2.6	ug/Kg	<	2.6	ug/Kg
Chlordane	9.3	ug/Kg	<	9.3	ug/Kg
4,4'-DDD	7.3	ug/Kg	<	7.3	ug/Kg
4,4'-DDE	2.6	ug/Kg	<	2.6	ug/Kg
4,4'-DDT	8.0	ug/Kg	<	8.0	ug/Kg
Dieldrin	1.3	ug/Kg	<	1.3	ug/Kg
Endosulfan I	9.3	ug/Kg	<	9.3	ug/Kg
Endosulfan II	2.6	ug/Kg	<	2.6	ug/Kg
Endosulfan Sulfate	44.2	ug/Kg	<	44.2	ug/Kg
Endrin	4.0	ug/Kg	<	4.0	ug/Kg
Endrin Aldehyde	15.4	ug/Kg	<	15.4	ug/Kg
Heptachlor	2.0	ug/Kg	<	2.0	ug/Kg
Heptachlor Epoxide	55.6	ug/Kg	<	55.6	ug/Kg
Methoxychlor	121	ug/Kg	<	121	ug/Kg
Toxaphene	161	ug/Kg	<	161	ug/Kg
PCB-1016	6	ug/Kg	<	6	ug/Kg
PCB-1221	6	ug/Kg	<	6	ug/Kg
PCB-1232	6	ug/Kg	<	6	ug/Kg
PCB-1242	6	ug/Kg	<	6	ug/Kg
PCB-1248	6	ug/Kg	<	6	ug/Kg
PCB-1254	6	ug/Kg	<	6	ug/Kg
PCB-1260	6	ug/Kg	<	6	ug/Kg

NDRC Laboratories, Inc.

David R. Godwin
David R. Godwin, Ph.D.
Chief Executive Officer



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592
Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8259
REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.
ADDRESS: P.O. Box 59902
Dallas, TX 75229
ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL
ID MARKS: B-7 8-10' Project #D832

TEST REQUESTED	DETECTION LIMIT		RESULTS	
TRPH by EPA Method 418.1				
Total Petroleum Hydrocarbon	10	mg/Kg	220	mg/Kg

NDRC Laboratories, Inc.


David R. Godwin, Ph.D.
Chief Executive Officer



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592
Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8260
REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.
ADDRESS: P.O. Box 59902
Dallas, TX 75229
ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL
ID. MARKS: B-8 3-5' Project #D832

TEST REQUESTED	DETECTION LIMIT			RESULTS	
Organochlorine Pesticides and PCB's					
Aldrin	2.7	ug/Kg	<	2.7	ug/Kg
Alpha-BHC	2.0	ug/Kg	<	2.0	ug/Kg
Beta-BHC	4.0	ug/Kg	<	4.0	ug/Kg
Delta-BHC	6.0	ug/Kg	<	6.0	ug/Kg
Gamma-BHC (Lindane)	2.6	ug/Kg	<	2.6	ug/Kg
Chlordane	9.3	ug/Kg	<	9.3	ug/Kg
4,4'-DDD	7.3	ug/Kg	<	7.3	ug/Kg
4,4'-DDE	2.6	ug/Kg	<	2.6	ug/Kg
4,4'-DDT	8.0	ug/Kg	<	8.0	ug/Kg
Dieldrin	1.3	ug/Kg	<	1.3	ug/Kg
Endosulfan I	9.3	ug/Kg	<	9.3	ug/Kg
Endosulfan II	2.6	ug/Kg	<	2.6	ug/Kg
Endosulfan Sulfate	44.2	ug/Kg	<	44.2	ug/Kg
Endrin	4.0	ug/Kg	<	4.0	ug/Kg
Endrin Aldehyde	15.4	ug/Kg	<	15.4	ug/Kg
Heptachlor	2.0	ug/Kg	<	2.0	ug/Kg
Heptachlor Epoxide	55.6	ug/Kg	<	55.6	ug/Kg
Methoxychlor	121	ug/Kg	<	121	ug/Kg
Toxaphene	161	ug/Kg	<	161	ug/Kg
PCB-1016	6	ug/Kg	<	6	ug/Kg
PCB-1221	6	ug/Kg	<	6	ug/Kg
PCB-1232	6	ug/Kg	<	6	ug/Kg
PCB-1242	6	ug/Kg	<	6	ug/Kg
PCB-1248	6	ug/Kg	<	6	ug/Kg
PCB-1254	6	ug/Kg	<	6	ug/Kg
PCB-1260	6	ug/Kg	<	6	ug/Kg

NDRC Laboratories, Inc.

David R. Godwin
David R. Godwin, Ph.D.
Chief Executive Officer



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592
Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8261
REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.
ADDRESS: P.O. Box 59902
Dallas, TX 75229
ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL
ID MARKS: B-9 8-9' Project #D832

TEST REQUESTED	DETECTION LIMIT			RESULTS	
Organochlorine Pesticides and PCB's					
Aldrin	2.7	ug/Kg	<	2.7	ug/Kg
Alpha-BHC	2.0	ug/Kg	<	2.0	ug/Kg
Beta-BHC	4.0	ug/Kg	<	4.0	ug/Kg
Delta-BHC	6.0	ug/Kg	<	6.0	ug/Kg
Gamma-BHC (Lindane)	2.6	ug/Kg	<	2.6	ug/Kg
Chlordane	9.3	ug/Kg	<	9.3	ug/Kg
4,4'-DDD	7.3	ug/Kg	<	7.3	ug/Kg
4,4'-DDE	2.6	ug/Kg	<	2.6	ug/Kg
4,4'-DDT	8.0	ug/Kg	<	8.0	ug/Kg
Dieldrin	1.3	ug/Kg	<	1.3	ug/Kg
Endosulfan I	9.3	ug/Kg	<	9.3	ug/Kg
Endosulfan II	2.6	ug/Kg	<	2.6	ug/Kg
Endosulfan Sulfate	44.2	ug/Kg	<	44.2	ug/Kg
Endrin	4.0	ug/Kg	<	4.0	ug/Kg
Endrin Aldehyde	15.4	ug/Kg	<	15.4	ug/Kg
Heptachlor	2.0	ug/Kg	<	2.0	ug/Kg
Heptachlor Epoxide	55.6	ug/Kg	<	55.6	ug/Kg
Methoxychlor	121	ug/Kg	<	121	ug/Kg
Toxaphene	161	ug/Kg	<	161	ug/Kg
PCB-1016	6	ug/Kg	<	6	ug/Kg
PCB-1221	6	ug/Kg	<	6	ug/Kg
PCB-1232	6	ug/Kg	<	6	ug/Kg
PCB-1242	6	ug/Kg	<	6	ug/Kg
PCB-1248	6	ug/Kg	<	6	ug/Kg
PCB-1254	6	ug/Kg	<	6	ug/Kg
PCB-1260	6	ug/Kg	<	6	ug/Kg

NDRC Laboratories, Inc.

David R. Godwin
David R. Godwin, Ph.D.
Chief Executive Officer



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592
Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8262
REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.
ADDRESS: P.O. Box 59902
Dallas, TX 75229
ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL
ID MARKS: B-10 8-9' Project #D832

TEST REQUESTED	DETECTION LIMIT			RESULTS	
Organochlorine Pesticides and PCB's					
Aldrin	2.7	ug/Kg	<	2.7	ug/Kg
Alpha-BHC	2.0	ug/Kg	<	2.0	ug/Kg
Beta-BHC	4.0	ug/Kg	<	4.0	ug/Kg
Delta-BHC	6.0	ug/Kg	<	6.0	ug/Kg
Gamma-BHC (Lindane)	2.6	ug/Kg	<	2.6	ug/Kg
Chlordane	9.3	ug/Kg	<	9.3	ug/Kg
4,4'-DDD	7.3	ug/Kg	<	7.3	ug/Kg
4,4'-DDE	2.6	ug/Kg	<	2.6	ug/Kg
4,4'-DDT	8.0	ug/Kg	<	8.0	ug/Kg
Dieldrin	1.3	ug/Kg	<	1.3	ug/Kg
Endosulfan I	9.3	ug/Kg	<	9.3	ug/Kg
Endosulfan II	2.6	ug/Kg	<	2.6	ug/Kg
Endosulfan Sulfate	44.2	ug/Kg	<	44.2	ug/Kg
Endrin	4.0	ug/Kg	<	4.0	ug/Kg
Endrin Aldehyde	15.4	ug/Kg	<	15.4	ug/Kg
Heptachlor	2.0	ug/Kg	<	2.0	ug/Kg
Heptachlor Epoxide	55.6	ug/Kg	<	55.6	ug/Kg
Methoxychlor	121	ug/Kg	<	121	ug/Kg
Toxaphene	161	ug/Kg	<	161	ug/Kg
PCB-1016	6	ug/Kg	<	6	ug/Kg
PCB-1221	6	ug/Kg	<	6	ug/Kg
PCB-1232	6	ug/Kg	<	6	ug/Kg
PCB-1242	6	ug/Kg	<	6	ug/Kg
PCB-1248	6	ug/Kg	<	6	ug/Kg
PCB-1254	6	ug/Kg	<	6	ug/Kg
PCB-1260	6	ug/Kg	<	6	ug/Kg

NDRC Laboratories, Inc. *David R. Godwin*
David R. Godwin, Ph.D.
Chief Executive Officer



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592

Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8263

REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.

ADDRESS: P.O. Box 59902

Dallas, TX 75229

ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL

ID MARKS: B-11 8-10' Project #D832

TEST REQUESTED	DETECTION LIMIT			RESULTS
----------------	-----------------	--	--	---------

Organochlorine Pesticides and PCB's

Aldrin	2.7	ug/Kg	<	2.7	ug/Kg
Alpha-BHC	2.0	ug/Kg	<	2.0	ug/Kg
Beta-BHC	4.0	ug/Kg	<	4.0	ug/Kg
Delta-BHC	6.0	ug/Kg	<	6.0	ug/Kg
Gamma-BHC (Lindane)	2.6	ug/Kg	<	2.6	ug/Kg
Chlordane	9.3	ug/Kg	<	9.3	ug/Kg
4,4'-DDD	7.3	ug/Kg	<	7.3	ug/Kg
4,4'-DDE	2.6	ug/Kg	<	2.6	ug/Kg
4,4'-DDT	8.0	ug/Kg	<	8.0	ug/Kg
Dieldrin	1.3	ug/Kg	<	1.3	ug/Kg
Endosulfan I	9.3	ug/Kg	<	9.3	ug/Kg
Endosulfan II	2.6	ug/Kg	<	2.6	ug/Kg
Endosulfan Sulfate	44.2	ug/Kg	<	44.2	ug/Kg
Endrin	4.0	ug/Kg	<	4.0	ug/Kg
Endrin Aldehyde	15.4	ug/Kg	<	15.4	ug/Kg
Heptachlor	2.0	ug/Kg	<	2.0	ug/Kg
Heptachlor Epoxide	55.6	ug/Kg	<	55.6	ug/Kg
Methoxychlor	121	ug/Kg	<	121	ug/Kg
Toxaphene	161	ug/Kg	<	161	ug/Kg
PCB-1016	6	ug/Kg	<	6	ug/Kg
PCB-1221	6	ug/Kg	<	6	ug/Kg
PCB-1232	6	ug/Kg	<	6	ug/Kg
PCB-1242	6	ug/Kg	<	6	ug/Kg
PCB-1248	6	ug/Kg	<	6	ug/Kg
PCB-1254	6	ug/Kg	<	6	ug/Kg
PCB-1260	6	ug/Kg	<	6	ug/Kg

NDRC Laboratories, Inc.

David R. Godwin
David R. Godwin, Ph.D.
Chief Executive Officer



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592
Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8263
REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.
ADDRESS: P.O. Box 59902
Dallas, TX 75229
ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL
ID MARKS: B-11 8-10' Project #D832

TEST REQUESTED	DETECTION LIMIT		RESULTS	
TRPH by EPA Method 418.1				
Total Petroleum Hydrocarbon	10	mg/Kg	4800	mg/Kg

NDRC Laboratories, Inc.

David R. Godwin
David R. Godwin, Ph.D.
Chief Executive Officer

111-13



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592
Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8264
REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.
ADDRESS: P.O. Box 59902
Dallas, TX 75229
ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL
ID MARKS: B-12 3-5' Project #D832

TEST REQUESTED	DETECTION LIMIT			RESULTS	
Organochlorine Pesticides and PCB's					
Aldrin	2.7	ug/Kg	<	2.7	ug/Kg
Alpha-BHC	2.0	ug/Kg	<	2.0	ug/Kg
Beta-BHC	4.0	ug/Kg	<	4.0	ug/Kg
Delta-BHC	6.0	ug/Kg	<	6.0	ug/Kg
Gamma-BHC(Lindane)	2.6	ug/Kg	<	2.6	ug/Kg
Chlordane	9.3	ug/Kg	<	9.3	ug/Kg
4,4'-DDD	7.3	ug/Kg	<	7.3	ug/Kg
4,4'-DDE	2.6	ug/Kg	<	2.6	ug/Kg
4,4'-DDT	8.0	ug/Kg	<	8.0	ug/Kg
Dieldrin	1.3	ug/Kg	<	1.3	ug/Kg
Endosulfan I	9.3	ug/Kg	<	9.3	ug/Kg
Endosulfan II	2.6	ug/Kg	<	2.6	ug/Kg
Endosulfan Sulfate	44.2	ug/Kg	<	44.2	ug/Kg
Endrin	4.0	ug/Kg	<	4.0	ug/Kg
Endrin Aldehyde	15.4	ug/Kg	<	15.4	ug/Kg
Heptachlor	2.0	ug/Kg	<	2.0	ug/Kg
Heptachlor Epoxide	55.6	ug/Kg	<	55.6	ug/Kg
Methoxychlor	121	ug/Kg	<	121	ug/Kg
Toxaphene	161	ug/Kg	<	161	ug/Kg
PCB-1016	6	ug/Kg	<	6	ug/Kg
PCB-1221	6	ug/Kg	<	6	ug/Kg
PCB-1232	6	ug/Kg	<	6	ug/Kg
PCB-1242	6	ug/Kg	<	6	ug/Kg
PCB-1248	6	ug/Kg	<	6	ug/Kg
PCB-1254	6	ug/Kg	<	6	ug/Kg
PCB-1260	6	ug/Kg	<	6	ug/Kg

NDRC Laboratories, Inc.

David R. Godwin, Ph.D.
David R. Godwin, Ph.D.
Chief Executive Officer



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592

Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8265

REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.

ADDRESS: P.O. Box 59902
Dallas, TX 75229

ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL

ID MARKS: B-13 8-9' Project #D832

TEST REQUESTED	DETECTION LIMIT			RESULTS	
Organochlorine Pesticides and PCB's					
Aldrin	2.7	ug/Kg	<	2.7	ug/Kg
Alpha-BHC	2.0	ug/Kg	<	2.0	ug/Kg
Beta-BHC	4.0	ug/Kg	<	4.0	ug/Kg
Delta-BHC	6.0	ug/Kg	<	6.0	ug/Kg
Gamma-BHC (Lindane)	2.6	ug/Kg	<	2.6	ug/Kg
Chlordane	9.3	ug/Kg	<	9.3	ug/Kg
4,4'-DDD	7.3	ug/Kg	<	7.3	ug/Kg
4,4'-DDE	2.6	ug/Kg	<	2.6	ug/Kg
4,4'-DDT	8.0	ug/Kg	<	8.0	ug/Kg
Dieldrin	1.3	ug/Kg	<	1.3	ug/Kg
Endosulfan I	9.3	ug/Kg	<	9.3	ug/Kg
Endosulfan II	2.6	ug/Kg	<	2.6	ug/Kg
Endosulfan Sulfate	44.2	ug/Kg	<	44.2	ug/Kg
Endrin	4.0	ug/Kg	<	4.0	ug/Kg
Endrin Aldehyde	15.4	ug/Kg	<	15.4	ug/Kg
Heptachlor	2.0	ug/Kg	<	2.0	ug/Kg
Heptachlor Epoxide	55.6	ug/Kg	<	55.6	ug/Kg
Methoxychlor	121	ug/Kg	<	121	ug/Kg
Toxaphene	161	ug/Kg	<	161	ug/Kg
PCB-1016	6	ug/Kg	<	6	ug/Kg
PCB-1221	6	ug/Kg	<	6	ug/Kg
PCB-1232	6	ug/Kg	<	6	ug/Kg
PCB-1242	6	ug/Kg	<	6	ug/Kg
PCB-1248	6	ug/Kg	<	6	ug/Kg
PCB-1254	6	ug/Kg	<	6	ug/Kg
PCB-1260	6	ug/Kg	<	6	ug/Kg

NDRC Laboratories, Inc.

David R. Godwin
David R. Godwin, Ph.D.
Chief Executive Officer



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592
Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8266
REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.
ADDRESS: P.O. Box 59902
Dallas, TX 75229
ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL
ID MARKS: B-14 8-10' Project #D832

TEST REQUESTED	DETECTION LIMIT			RESULTS
Organochlorine Pesticides and PCB's				
Aldrin	2.7	ug/Kg	<	2.7 ug/Kg
Alpha-BHC	2.0	ug/Kg	<	2.0 ug/Kg
Beta-BHC	4.0	ug/Kg	<	4.0 ug/Kg
Delta-BHC	6.0	ug/Kg	<	6.0 ug/Kg
Gamma-BHC(Lindane)	2.6	ug/Kg	<	2.6 ug/Kg
Chlordane	9.3	ug/Kg	<	9.3 ug/Kg
4,4'-DDD	7.3	ug/Kg	<	7.3 ug/Kg
4,4'-DDE	2.6	ug/Kg	<	2.6 ug/Kg
4,4'-DDT	8.0	ug/Kg	<	8.0 ug/Kg
Dieldrin	1.3	ug/Kg	<	1.3 ug/Kg
Endosulfan I	9.3	ug/Kg	<	9.3 ug/Kg
Endosulfan II	2.6	ug/Kg	<	2.6 ug/Kg
Endosulfan Sulfate	44.2	ug/Kg	<	44.2 ug/Kg
Endrin	4.0	ug/Kg	<	4.0 ug/Kg
Endrin Aldehyde	15.4	ug/Kg	<	15.4 ug/Kg
Heptachlor	2.0	ug/Kg	<	2.0 ug/Kg
Heptachlor Epoxide	55.6	ug/Kg	<	55.6 ug/Kg
Methoxychlor	121	ug/Kg	<	121 ug/Kg
Toxaphene	161	ug/Kg	<	161 ug/Kg
PCB-1016	6	ug/Kg	<	6 ug/Kg
PCB-1221	6	ug/Kg	<	6 ug/Kg
PCB-1232	6	ug/Kg	<	6 ug/Kg
PCB-1242	6	ug/Kg	<	6 ug/Kg
PCB-1248	6	ug/Kg	<	6 ug/Kg
PCB-1254	6	ug/Kg	<	6 ug/Kg
PCB-1260	6	ug/Kg	<	6 ug/Kg

NDRC Laboratories, Inc.

David R. Godwin
David R. Godwin, Ph.D.
Chief Executive Officer



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592
Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8267
REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.
ADDRESS: P.O. Box 59902
Dallas, TX 75229
ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL
ID MARKS: B-15 3-5' Project #D832

TEST REQUESTED	DETECTION LIMIT			RESULTS	
Organochlorine Pesticides and PCB's					
Aldrin	27	ug/Kg	<	27	ug/Kg
Alpha-BHC	20	ug/Kg	<	20	ug/Kg
Beta-BHC	40	ug/Kg	<	40	ug/Kg
Delta-BHC	60	ug/Kg	<	60	ug/Kg
Gamma-BHC (Lindane)	26	ug/Kg	<	26	ug/Kg
Chlordane	93	ug/Kg	<	93	ug/Kg
4,4'-DDD	73	ug/Kg	<	73	ug/Kg
4,4'-DDE	26	ug/Kg	<	26	ug/Kg
4,4'-DDT	80	ug/Kg	<	80	ug/Kg
Dieldrin	13	ug/Kg	<	13	ug/Kg
Endosulfan I	93	ug/Kg	<	93	ug/Kg
Endosulfan II	26	ug/Kg	<	26	ug/Kg
Endosulfan Sulfate	442	ug/Kg	<	442	ug/Kg
Endrin	40	ug/Kg	<	40	ug/Kg
Endrin Aldehyde	154	ug/Kg	<	154	ug/Kg
Heptachlor	20	ug/Kg	<	20	ug/Kg
Heptachlor Epoxide	556	ug/Kg	<	556	ug/Kg
Methoxychlor	1210	ug/Kg	<	1210	ug/Kg
Toxaphene	1610	ug/Kg	<	1610	ug/Kg
PCB-1016	67	ug/Kg	<	67	ug/Kg
PCB-1221	67	ug/Kg	<	67	ug/Kg
PCB-1232	67	ug/Kg	<	67	ug/Kg
PCB-1242	67	ug/Kg	<	67	ug/Kg
PCB-1248	67	ug/Kg	<	67	ug/Kg
PCB-1254	67	ug/Kg	<	67	ug/Kg
PCB-1260	67	ug/Kg	<	67	ug/Kg

NDRC Laboratories, Inc.

David R. Godwin
David R. Godwin, Ph.D.
Chief Executive Officer



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592
Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8269
REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.
ADDRESS: P.O. Box 59902
Dallas, TX 75229
ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL
ID MARKS: B-17 3-5' Project #D832

TEST REQUESTED	DETECTION LIMIT			RESULTS	
Organochlorine Pesticides and PCB's					
Aldrin	2.7	ug/Kg	<	2.7	ug/Kg
Alpha-BHC	2.0	ug/Kg	<	2.0	ug/Kg
Beta-BHC	4.0	ug/Kg	<	4.0	ug/Kg
Delta-BHC	6.0	ug/Kg	<	6.0	ug/Kg
Gamma-BHC (Lindane)	2.6	ug/Kg	<	2.6	ug/Kg
Chlordane	9.3	ug/Kg	<	11.0	ug/Kg
4,4'-DDD	7.3	ug/Kg	<	7.3	ug/Kg
4,4'-DDE	2.6	ug/Kg	<	2.6	ug/Kg
4,4'-DDT	8.0	ug/Kg	<	8.0	ug/Kg
Dieldrin	1.3	ug/Kg	<	1.3	ug/Kg
Endosulfan I	9.3	ug/Kg	<	9.3	ug/Kg
Endosulfan II	2.6	ug/Kg	<	2.6	ug/Kg
Endosulfan Sulfate	44.2	ug/Kg	<	44.2	ug/Kg
Endrin	4.0	ug/Kg	<	4.0	ug/Kg
Endrin Aldehyde	15.4	ug/Kg	<	15.4	ug/Kg
Heptachlor	2.0	ug/Kg	<	2.0	ug/Kg
Heptachlor Epoxide	55.6	ug/Kg	<	55.6	ug/Kg
Methoxychlor	121	ug/Kg	<	121	ug/Kg
Toxaphene	161	ug/Kg	<	161	ug/Kg
PCB-1016	6	ug/Kg	<	6	ug/Kg
PCB-1221	6	ug/Kg	<	6	ug/Kg
PCB-1232	6	ug/Kg	<	6	ug/Kg
PCB-1242	6	ug/Kg	<	6	ug/Kg
PCB-1248	6	ug/Kg	<	6	ug/Kg
PCB-1254	6	ug/Kg	<	6	ug/Kg
PCB-1260	6	ug/Kg	<	6	ug/Kg

NDRC Laboratories, Inc.

David R. Godwin
David R. Godwin, Ph.D.
Chief Executive Officer



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592

Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8270

REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.

ADDRESS: P.O. Box 59902

Dallas, TX 75229

ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL

ID MARKS: B-18 8-10' Project #D832

TEST REQUESTED	DETECTION LIMIT			RESULTS	
Organochlorine Pesticides and PCB's					
Aldrin	2.7	ug/Kg	<	2.7	ug/Kg
Alpha-BHC	2.0	ug/Kg	<	2.0	ug/Kg
Beta-BHC	4.0	ug/Kg	<	4.0	ug/Kg
Delta-BHC	6.0	ug/Kg	<	6.0	ug/Kg
Gamma-BHC(Lindane)	2.6	ug/Kg	<	2.6	ug/Kg
Chlordane	9.3	ug/Kg	<	9.3	ug/Kg
4,4'-DDD	7.3	ug/Kg	<	7.3	ug/Kg
4,4'-DDE	2.6	ug/Kg	<	2.6	ug/Kg
4,4'-DDT	8.0	ug/Kg	<	8.0	ug/Kg
Dieldrin	1.3	ug/Kg	<	1.3	ug/Kg
Endosulfan I	9.3	ug/Kg	<	9.3	ug/Kg
Endosulfan II	2.6	ug/Kg	<	2.6	ug/Kg
Endosulfan Sulfate	44.2	ug/Kg	<	44.2	ug/Kg
Endrin	4.0	ug/Kg	<	4.0	ug/Kg
Endrin Aldehyde	15.4	ug/Kg	<	15.4	ug/Kg
Heptachlor	2.0	ug/Kg	<	2.0	ug/Kg
Heptachlor Epoxide	55.6	ug/Kg	<	55.6	ug/Kg
Methoxychlor	121	ug/Kg	<	121	ug/Kg
Toxaphene	161	ug/Kg	<	161	ug/Kg
PCB-1016	6	ug/Kg	<	6	ug/Kg
PCB-1221	6	ug/Kg	<	6	ug/Kg
PCB-1232	6	ug/Kg	<	6	ug/Kg
PCB-1242	6	ug/Kg	<	6	ug/Kg
PCB-1248	6	ug/Kg	<	6	ug/Kg
PCB-1254	6	ug/Kg	<	6	ug/Kg
PCB-1260	6	ug/Kg	<	6	ug/Kg

NDRC Laboratories, Inc.

David R. Godwin
David R. Godwin, Ph.D.
Chief Executive Officer



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592

Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8271

REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.

ADDRESS: P.O. Box 59902
Dallas, TX 75229

ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL

ID MARKS: B-19 8-10' Project #D832

TEST REQUESTED

DETECTION LIMIT

RESULTS

TRPH by EPA Method 418.1

Total Petroleum Hydrocarbon

10

mg/Kg

210

mg/Kg

NDRC Laboratories, Inc.

David R. Godwin
David R. Godwin, Ph.D.
Chief Executive Officer

111-21



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592
Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8272
REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.
ADDRESS: P.O. Box 59902
Dallas, TX 75229
ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL
ID MARKS: B-20 8-10' Project #D832

TEST REQUESTED	DETECTION LIMIT			RESULTS	
Organochlorine Pesticides and PCB's					
Aldrin	2.7	ug/Kg	<	2.7	ug/Kg
Alpha-BHC	2.0	ug/Kg	<	2.0	ug/Kg
Beta-BHC	4.0	ug/Kg	<	4.0	ug/Kg
Delta-BHC	6.0	ug/Kg	<	6.0	ug/Kg
Gamma-BHC (Lindane)	2.6	ug/Kg	<	2.6	ug/Kg
Chlordane	9.3	ug/Kg	<	26.0	ug/Kg
4,4'-DDD	7.3	ug/Kg	<	7.3	ug/Kg
4,4'-DDE	2.6	ug/Kg	<	2.6	ug/Kg
4,4'-DDT	8.0	ug/Kg	<	8.0	ug/Kg
Dieldrin	1.3	ug/Kg	<	1.3	ug/Kg
Endosulfan I	9.3	ug/Kg	<	9.3	ug/Kg
Endosulfan II	2.6	ug/Kg	<	2.6	ug/Kg
Endosulfan Sulfate	44.2	ug/Kg	<	44.2	ug/Kg
Endrin	4.0	ug/Kg	<	4.0	ug/Kg
Endrin Aldehyde	15.4	ug/Kg	<	15.4	ug/Kg
Heptachlor	2.0	ug/Kg	<	2.0	ug/Kg
Heptachlor Epoxide	55.6	ug/Kg	<	55.6	ug/Kg
Methoxychlor	121	ug/Kg	<	121	ug/Kg
Toxaphene	161	ug/Kg	<	161	ug/Kg
PCB-1016	6	ug/Kg	<	6	ug/Kg
PCB-1221	6	ug/Kg	<	6	ug/Kg
PCB-1232	6	ug/Kg	<	6	ug/Kg
PCB-1242	6	ug/Kg	<	6	ug/Kg
PCB-1248	6	ug/Kg	<	6	ug/Kg
PCB-1254	6	ug/Kg	<	6	ug/Kg
PCB-1260	6	ug/Kg	<	6	ug/Kg

NDRC Laboratories, Inc.

David R. Godwin
David R. Godwin, Ph.D.
Chief Executive Officer



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592
Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8273
REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.
ADDRESS: P.O. Box 59902
Dallas, TX 75229
ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL
ID MARKS: B-21 8-10' Project #D832

TEST REQUESTED	DETECTION LIMIT			RESULTS
Organochlorine Pesticides and PCB's				
Aldrin	27	ug/Kg	<	27 ug/Kg
Alpha-BHC	20	ug/Kg	<	20 ug/Kg
Beta-BHC	40	ug/Kg	<	40 ug/Kg
Delta-BHC	60	ug/Kg	<	60 ug/Kg
Gamma-BHC (Lindane)	26	ug/Kg	<	26 ug/Kg
Chlordane	93	ug/Kg	<	93 ug/Kg
4,4'-DDD	73	ug/Kg	<	73 ug/Kg
4,4'-DDE	26	ug/Kg	<	26 ug/Kg
4,4'-DDT	80	ug/Kg	<	80 ug/Kg
Dieldrin	13	ug/Kg	<	13 ug/Kg
Endosulfan I	93	ug/Kg	<	93 ug/Kg
Endosulfan II	26	ug/Kg	<	26 ug/Kg
Endosulfan Sulfate	442	ug/Kg	<	442 ug/Kg
Endrin	40	ug/Kg	<	40 ug/Kg
Endrin Aldehyde	154	ug/Kg	<	154 ug/Kg
Heptachlor	20	ug/Kg	<	20 ug/Kg
Heptachlor Epoxide	556	ug/Kg	<	556 ug/Kg
Methoxychlor	1210	ug/Kg	<	1210 ug/Kg
Toxaphene	1610	ug/Kg	<	1610 ug/Kg
PCB-1016	67	ug/Kg	<	67 ug/Kg
PCB-1221	67	ug/Kg	<	67 ug/Kg
PCB-1232	67	ug/Kg	<	67 ug/Kg
PCB-1242	67	ug/Kg	<	67 ug/Kg
PCB-1248	67	ug/Kg	<	67 ug/Kg
PCB-1254	67	ug/Kg	<	67 ug/Kg
PCB-1260	67	ug/Kg	<	67 ug/Kg

NDRC Laboratories, Inc.

David R. Godwin
David R. Godwin, Ph.D.
Chief Executive Officer



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592
Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8274
REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.
ADDRESS: P.O. Box 59902
Dallas, TX 75229
ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL
ID MARKS: B-22 3-5' Project #D832

TEST REQUESTED	DETECTION LIMIT			RESULTS
Organochlorine Pesticides and PCB's				
Aldrin	2.7	ug/Kg	<	2.7 ug/Kg
Alpha-BHC	2.0	ug/Kg	<	2.0 ug/Kg
Beta-BHC	4.0	ug/Kg	<	4.0 ug/Kg
Delta-BHC	6.0	ug/Kg	<	6.0 ug/Kg
Gamma-BHC (Lindane)	2.6	ug/Kg	<	2.6 ug/Kg
Chlordane	9.3	ug/Kg	<	9.3 ug/Kg
4,4'-DDD	7.3	ug/Kg	<	7.3 ug/Kg
4,4'-DDE	2.6	ug/Kg	<	2.6 ug/Kg
4,4'-DDT	8.0	ug/Kg	<	8.0 ug/Kg
Dieldrin	1.3	ug/Kg	<	1.3 ug/Kg
Endosulfan I	9.3	ug/Kg	<	9.3 ug/Kg
Endosulfan II	2.6	ug/Kg	<	2.6 ug/Kg
Endosulfan Sulfate	44.2	ug/Kg	<	44.2 ug/Kg
Endrin	4.0	ug/Kg	<	4.0 ug/Kg
Endrin Aldehyde	15.4	ug/Kg	<	15.4 ug/Kg
Heptachlor	2.0	ug/Kg	<	2.0 ug/Kg
Heptachlor Epoxide	55.6	ug/Kg	<	55.6 ug/Kg
Methoxychlor	121	ug/Kg	<	121 ug/Kg
Toxaphene	161	ug/Kg	<	161 ug/Kg
PCB-1016	6	ug/Kg	<	6 ug/Kg
PCB-1221	6	ug/Kg	<	6 ug/Kg
PCB-1232	6	ug/Kg	<	6 ug/Kg
PCB-1242	6	ug/Kg	<	6 ug/Kg
PCB-1248	6	ug/Kg	<	6 ug/Kg
PCB-1254	6	ug/Kg	<	6 ug/Kg
PCB-1260	6	ug/Kg	<	6 ug/Kg

NDRC Laboratories, Inc.

David R. Godwin
David R. Godwin, Ph.D.
Chief Executive Officer

111-24



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592
Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8275
REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.
ADDRESS: P.O. Box 59902
Dallas, TX 75229
ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL
ID MARKS: B-23 3-5' Project #D832

TEST REQUESTED	DETECTION LIMIT			RESULTS	
Organochlorine Pesticides and PCB's					
Aldrin	2.7	ug/Kg	<	2.7	ug/Kg
Alpha-BHC	2.0	ug/Kg	<	2.0	ug/Kg
Beta-BHC	4.0	ug/Kg	<	4.0	ug/Kg
Delta-BHC	6.0	ug/Kg	<	6.0	ug/Kg
Gamma-BHC (Lindane)	2.6	ug/Kg	<	2.6	ug/Kg
Chlordane	9.3	ug/Kg	<	9.3	ug/Kg
4,4'-DDD	7.3	ug/Kg	<	7.3	ug/Kg
4,4'-DDE	2.6	ug/Kg	<	2.6	ug/Kg
4,4'-DDT	8.0	ug/Kg	<	8.0	ug/Kg
Dieldrin	1.3	ug/Kg	<	1.3	ug/Kg
Endosulfan I	9.3	ug/Kg	<	9.3	ug/Kg
Endosulfan II	2.6	ug/Kg	<	2.6	ug/Kg
Endosulfan Sulfate	44.2	ug/Kg	<	44.2	ug/Kg
Endrin	4.0	ug/Kg	<	4.0	ug/Kg
Endrin Aldehyde	15.4	ug/Kg	<	15.4	ug/Kg
Heptachlor	2.0	ug/Kg	<	2.0	ug/Kg
Heptachlor Epoxide	55.6	ug/Kg	<	55.6	ug/Kg
Methoxychlor	121	ug/Kg	<	121	ug/Kg
Toxaphene	161	ug/Kg	<	161	ug/Kg
PCB-1016	6	ug/Kg	<	6	ug/Kg
PCB-1221	6	ug/Kg	<	6	ug/Kg
PCB-1232	6	ug/Kg	<	6	ug/Kg
PCB-1242	6	ug/Kg	<	6	ug/Kg
PCB-1248	6	ug/Kg	<	6	ug/Kg
PCB-1254	6	ug/Kg	<	6	ug/Kg
PCB-1260	6	ug/Kg	<	6	ug/Kg

NDRC Laboratories, Inc.


David R. Godwin, Ph.D.
Chief Executive Officer



NDRC LABORATORIES, INC.

Dallas - 1101 Commerce Drive • Richardson, Texas 75081 • (214) 238-5591 • Fax (214) 238-5592
Houston - 6284 Brookhill Drive • Houston, Texas 77087 • (713) 644-9437 • Fax (713) 644-9160

DATE RECEIVED: 3-27-90

REPORT NUMBER: D90-8276
REPORT DATE: 4-10-90

SAMPLE SUBMITTED BY: Maxim Engineers, Inc.
ADDRESS: P.O. Box 59902
Dallas, TX 75229
ATTENTION: Mr. Brian Mosley

SAMPLE MATRIX: SOIL
ID MARKS: B-24 8-10' Project #D832

TEST REQUESTED	DETECTION LIMIT			RESULTS	
----------------	-----------------	--	--	---------	--

Organochlorine Pesticides and PCB's

Aldrin	2.7	ug/Kg	<	2.7	ug/Kg
Alpha-BHC	2.0	ug/Kg	<	2.0	ug/Kg
Beta-BHC	4.0	ug/Kg	<	4.0	ug/Kg
Delta-BHC	6.0	ug/Kg	<	6.0	ug/Kg
Gamma-BHC (Lindane)	2.6	ug/Kg	<	2.6	ug/Kg
Chlordane	9.3	ug/Kg	<	9.3	ug/Kg
4,4'-DDD	7.3	ug/Kg	<	7.3	ug/Kg
4,4'-DDE	2.6	ug/Kg	<	2.6	ug/Kg
4,4'-DDT	8.0	ug/Kg	<	8.0	ug/Kg
Dieldrin	1.3	ug/Kg	<	1.3	ug/Kg
Endosulfan I	9.3	ug/Kg	<	9.3	ug/Kg
Endosulfan II	2.6	ug/Kg	<	2.6	ug/Kg
Endosulfan Sulfate	44.2	ug/Kg	<	44.2	ug/Kg
Endrin	4.0	ug/Kg	<	4.0	ug/Kg
Endrin Aldehyde	15.4	ug/Kg	<	75.0	ug/Kg
Heptachlor	2.0	ug/Kg	<	2.0	ug/Kg
Heptachlor Epoxide	55.6	ug/Kg	<	55.6	ug/Kg
Methoxychlor	121	ug/Kg	<	121	ug/Kg
Toxaphene	161	ug/Kg	<	161	ug/Kg
PCB-1016	6	ug/Kg	<	6	ug/Kg
PCB-1221	6	ug/Kg	<	6	ug/Kg
PCB-1232	6	ug/Kg	<	6	ug/Kg
PCB-1242	6	ug/Kg	<	6	ug/Kg
PCB-1248	6	ug/Kg	<	6	ug/Kg
PCB-1254	6	ug/Kg	<	6	ug/Kg
PCB-1260	6	ug/Kg	<	6	ug/Kg

NDRC Laboratories, Inc.

David R. Goawin
David R. Goawin, Ph.D.
Chief Executive Officer

111-26

SECTION IV



VIEW OF SUBJECT SITE LOOKING NORTHWEST

VI - 1



VIEW OF SUBJECT SITE LOOKING SOUTHEAST

V1-2



VIEW OF SUBJECT SITE LOOKING WEST

VI-3



STORAGE AREA SOUTH OF SUBJECT SITE

VI-4

FINAL PAGE

ADMINISTRATIVE RECORD

FINAL PAGE

FINAL PAGE

ADMINISTRATIVE RECORD

FINAL PAGE